




Dimensions



Accessories



LARK 111

PRODUCT

Name	ORBITAL 1 LARK111 N
Reference	A0101101N
Color	Matt black
RAL	9005
Category	CEILING RECESSED

LIGHT SOURCE

Type	LARK 111 EXCL
Chromatic stability	MacAdam Step 2
Power	Max 1 X 12 W
LED lifespan	L90B10 >55.000h

LIGHTING FIXTURE | ELECTRICAL DATA

Driver	Excluded
Frequency	50/60 Hz
Dimming	No Dim / DALI / Push / Phase Cut
Electrical insulation class	☐

OTHER DATA

Sealing	IP20
Wireless control	Please Consult
Emergency power supply	Please Consult
Recess measurements	162 x 162 mm
Swivel angle	X35° Y35°
Weight	1000 g
Packaged weight	1147,6 g
Packaging dimensions	190 x 190 x 120 mm
Units per package	1
Materials	Aluminium



The essential cardan luminaire for traditional 111mm-lamps. Or for use with our powerful LARK-111 LED lamps. to obtain a high quality and high efficient LED fitting with impressive aesthetics.



LarK-111



LarK-111 · HONEYCOMB LOUVER

Lark-111						P	CCT	Beam	I	Flux	Flux Out	LOR
PHASE CUT *	A25	☉	-10-10-	W N	6,5W	2700K	19°	200mA	900 lm	828 lm	92%	
	A25	☉	-10-11-	W N	6,5W	3000K	19°	200mA	940 lm	865 lm	92%	
	A25	☉	-10-12-	W N	6,5W	4000K	19°	200mA	950 lm	874 lm	92%	
	A25	☉	-10-20-	W N	6,5W	2700K	40°	200mA	900 lm	774 lm	86%	
	A25	☉	-10-21-	W N	6,5W	3000K	40°	200mA	940 lm	808 lm	86%	
	A25	☉	-10-22-	W N	6,5W	4000K	40°	200mA	950 lm	817 lm	86%	
PHASE CUT *	A25	☉	-20-10-	W N	12W	2700K	19°	350mA	1440 lm	1325 lm	92%	
	A25	☉	-20-11-	W N	12W	3000K	19°	350mA	1500 lm	1380 lm	92%	
	A25	☉	-20-12-	W N	12W	4000K	19°	350mA	1520 lm	1398 lm	92%	
	A25	☉	-20-20-	W N	12W	2700K	40°	350mA	1440 lm	1238 lm	86%	
	A25	☉	-20-21-	W N	12W	3000K	40°	350mA	1500 lm	1290 lm	86%	
	A25	☉	-20-22-	W N	12W	4000K	40°	350mA	1520 lm	1307 lm	86%	
DALI I PUSH *	A25	☉	-21-10-	W N	12W	2700K	19°	350mA	1440 lm	1325 lm	92%	
	A25	☉	-21-11-	W N	12W	3000K	19°	350mA	1500 lm	1380 lm	92%	
	A25	☉	-21-12-	W N	12W	4000K	19°	350mA	1520 lm	1398 lm	92%	
	A25	☉	-21-20-	W N	12W	2700K	40°	350mA	1440 lm	1238 lm	86%	
	A25	☉	-21-21-	W N	12W	3000K	40°	350mA	1500 lm	1290 lm	86%	
	A25	☉	-21-22-	W N	12W	4000K	40°	350mA	1520 lm	1307 lm	86%	


220 V~ | CRI>90 | L90B10 >55.000h

* OTHER DIM options PLEASE CONSULT



OPTIONS	
2	LarK-111
3	LarK-111 Honeycomb**

** Honeycomb affects lighting parameters

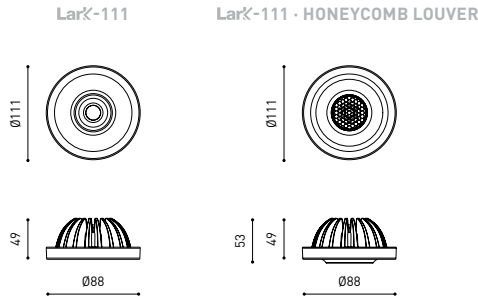



Fuente de luz (LED) reemplazable por un profesional autorizado

Replaceable (LED only) light source by an authorized professional.

Source lumineuse (LED) remplaçable par un professionnel agréé

Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato

Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado

Replaceable control gear by an authorized professional

Dispositif de commande remplaçable par un professionnel agréé

Alimentatore sostituibile da parte di un professionista autorizzato

Auswechselbares Betriebsgerät durch autorisierten Fachmann

Instrucciones para el final de vida y la eliminación de los componentes:

Instructions on end-of-life and component disposal:

Instructions pour la gestion des composants en fin de vie et leur mise au rebut :

Istruzioni per il fine vita e lo smaltimento dei componenti:


Anweisungen zur entsorgung der Leuchtenkomponenten:



Interrumpir la alimentación del aparato
Cut the power supply to the luminaire
Couper l'alimentation du luminaire
Interrompere l'alimentazione dell'apparecchio
Stromversorgung der Leuchte unterbrechen



Quitar la(s) fuente(s) de luz para el desecho
Remove light source(s) for disposal
Retirer la (les) source(s) lumineuse(s) pour l'élimination
Rimuovere la/le sorgente/e di luce per lo smaltimento
Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho
Remove the battery for decommissioning
Retirer la batterie pour sa mise au rebut
Rimuovere la batteria per la dismissione
Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho
Remove control gear for disposal
Retirer le dispositif de commande pour l'élimination
Rimuovere l'alimentatore per lo smaltimento
Betriebsgerät zur Entsorgung ausbauen

Enviar los materiales a un centro de recogida RAEE
Send the materials to a WEEE collection centre
Envoyer les matériaux dans une déchetterie DEEE
Inviare i materiali ad un centro di raccolta RAEE
Die Materialien in einem WEEE-Zentrum entsorgen

