




Dimensions



Accessories



LARK 111

PRODUCT

|           |                     |
|-----------|---------------------|
| Name      | ORBITAL 1 LARK111 W |
| Reference | A0101101W           |
| Color     | Matt white          |
| RAL       | 9016                |
| Category  | CEILING RECESSED    |

LIGHT SOURCE

|                     |                 |
|---------------------|-----------------|
| Type                | LARK 111   EXCL |
| Chromatic stability | MacAdam Step 2  |
| Power               | Max 1 X 12 W    |
| LED lifespan        | L90B10 >55.000h |

LIGHTING FIXTURE | ELECTRICAL DATA

|                             |                                  |
|-----------------------------|----------------------------------|
| Driver                      | Excluded                         |
| Frequency                   | 50/60 Hz                         |
| Dimming                     | No Dim / DALI / Push / Phase Cut |
| Electrical insulation class | <input type="checkbox"/>         |

OTHER DATA

|                        |                    |
|------------------------|--------------------|
| Sealing                | IP20               |
| Wireless control       | Please Consult     |
| Emergency power supply | Please Consult     |
| Recess measurements    | 162 x 162 mm       |
| Swivel angle           | X35° Y35°          |
| Weight                 | 1000 g             |
| Packaged weight        | 1147,6 g           |
| Packaging dimensions   | 190 x 190 x 120 mm |
| Units per package      | 1                  |
| Materials              | Aluminium          |



The essential cardan luminaire for traditional 111mm-lamps. Or for use with our powerful LARK-111 LED lamps. to obtain a high quality and high efficient LED fitting with impressive aesthetics.



Lark-111



Lark-111 · HONEYCOMB LOUVER

| Lark-111      |                       | P    | CCT   | Beam | I     | Flux    | Flux Out | LOR |
|---------------|-----------------------|------|-------|------|-------|---------|----------|-----|
| PHASE CUT *   | A25 ☉ -10-10-   W   N | 6,5W | 2700K | 19°  | 200mA | 900 lm  | 828 lm   | 92% |
|               | A25 ☉ -10-11-   W   N | 6,5W | 3000K | 19°  | 200mA | 940 lm  | 865 lm   | 92% |
|               | A25 ☉ -10-12-   W   N | 6,5W | 4000K | 19°  | 200mA | 950 lm  | 874 lm   | 92% |
|               | A25 ☉ -10-20-   W   N | 6,5W | 2700K | 40°  | 200mA | 900 lm  | 774 lm   | 86% |
|               | A25 ☉ -10-21-   W   N | 6,5W | 3000K | 40°  | 200mA | 940 lm  | 808 lm   | 86% |
| PHASE CUT *   | A25 ☉ -10-22-   W   N | 6,5W | 4000K | 40°  | 200mA | 950 lm  | 817 lm   | 86% |
|               | A25 ☉ -20-10-   W   N | 12W  | 2700K | 19°  | 350mA | 1440 lm | 1325 lm  | 92% |
|               | A25 ☉ -20-11-   W   N | 12W  | 3000K | 19°  | 350mA | 1500 lm | 1380 lm  | 92% |
|               | A25 ☉ -20-12-   W   N | 12W  | 4000K | 19°  | 350mA | 1520 lm | 1398 lm  | 92% |
|               | A25 ☉ -20-20-   W   N | 12W  | 2700K | 40°  | 350mA | 1440 lm | 1238 lm  | 86% |
| PHASE CUT *   | A25 ☉ -20-21-   W   N | 12W  | 3000K | 40°  | 350mA | 1500 lm | 1290 lm  | 86% |
|               | A25 ☉ -20-22-   W   N | 12W  | 4000K | 40°  | 350mA | 1520 lm | 1307 lm  | 86% |
|               | A25 ☉ -21-10-   W   N | 12W  | 2700K | 19°  | 350mA | 1440 lm | 1325 lm  | 92% |
|               | A25 ☉ -21-11-   W   N | 12W  | 3000K | 19°  | 350mA | 1500 lm | 1380 lm  | 92% |
|               | A25 ☉ -21-12-   W   N | 12W  | 4000K | 19°  | 350mA | 1520 lm | 1398 lm  | 92% |
| DALI   PUSH * | A25 ☉ -21-20-   W   N | 12W  | 2700K | 40°  | 350mA | 1440 lm | 1238 lm  | 86% |
|               | A25 ☉ -21-21-   W   N | 12W  | 3000K | 40°  | 350mA | 1500 lm | 1290 lm  | 86% |
|               | A25 ☉ -21-22-   W   N | 12W  | 4000K | 40°  | 350mA | 1520 lm | 1307 lm  | 86% |

220 V~ | CRI>90 | L90B10 >55.000h

\* OTHER DIM options PLEASE CONSULT



MacAdam Step 2



FAST | CONNEC



INCL




19° / 40°

## ☉ OPTIONS

|   |                      |
|---|----------------------|
| 2 | Lark-111             |
| 3 | Lark-111 Honeycomb** |

\*\* Honeycomb affects lighting parameters

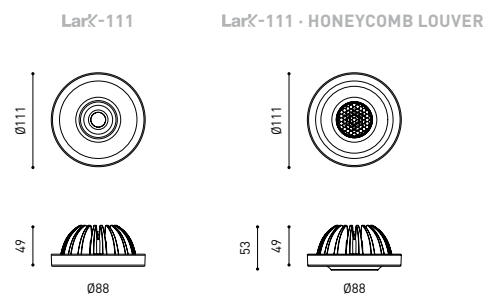



Fuente de luz (LED) reemplazable por un profesional autorizado

Replaceable (LED only) light source by an authorized professional.

Source lumineuse (LED) remplaçable par un professionnel agréé

Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato

Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado

Replaceable control gear by an authorized professional

Dispositif de commande remplaçable par un professionnel agréé

Alimentatore sostituibile da parte di un professionista autorizzato

Auswechselbares Betriebsgerät durch autorisierten Fachmann

## Instrucciones para el final de vida y la eliminación de los componentes:

### Instructions on end-of-life and component disposal:

### Instructions pour la gestion des composants en fin de vie et leur mise au rebut :

### Istruzioni per il fine vita e lo smaltimento dei componenti:

### Anweisungen zur entsorgung der Leuchtenkomponenten:



Interrumpir la alimentación del aparato  
Cut the power supply to the luminaire  
Couper l'alimentation du luminaire  
Interrompere l'alimentazione dell'apparecchio  
Stromversorgung der Leuchte unterbrechen



Quitar la(s) fuente(s) de luz para el desecho  
Remove light source(s) for disposal  
Retirer la (les) source(s) lumineuse(s) pour l'élimination  
Rimuovere la/le sorgente/e di luce per lo smaltimento  
Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho  
Remove the battery for decommissioning  
Retirer la batterie pour sa mise au rebut  
Rimuovere la batteria per la dismissione  
Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho  
Remove control gear for disposal  
Retirer le dispositif de commande pour l'élimination  
Rimuovere l'alimentatore per lo smaltimento  
Betriebsgerät zur Entsorgung ausbauen

Enviar los materiales a un centro de recogida RAEE  
Send the materials to a WEEE collection centre  
Envoyer les matériaux dans une déchetterie DEEE  
Inviare i materiali ad un centro di raccolta RAEE  
Die Materialien in einem WEEE-Zentrum entsorgen

