Puck

ARKOSLIGHT

Dimensions



Awards

	PRODUCT
Name	PUCK M 2700K WT
Reference	A2511000WT
Colour	Textured white
RAL	9016
Category	SURFACE
	LIGHT SOURCE
Type	LED
Gross luminous flux	780 lm
Colour temperature	2700 K
Chromatic stability	MacAdam Step 3
Colour Rendering Index	CRI>90
Power	10 W
Efficacy	78 lm/W
LED lifespan	L70B10 >50.000h
Energy efficiency class	G
	LIGHTING FIXTURE | PHOTOMETRIC DATA
Lighting efficiency	75%
Light beam angle	38°
UGR	< 19
	LIGHTING FIXTURE | ELECTRICAL DATA
Driver	Included
Power values of the system	10 W
Frequency	50/60 Hz
Dimming	No Dim
Electrical insulation class	⏚
	OTHER DATA
Sealing	IP20
Weight	315 g
Packaged weight	360 g
Packaging dimensions	112 x 100 x 60 mm
Units per package	1
Materials	Aluminium / Optical Glass

CE

Puck is a luminary that –for its function, opening angle and luminous flux- manages to embody, in a surface piece, the performance of the classic recessed luminaries with dichroic lamps. Puck is designed to undertake general lighting functions and, moreover, given its ultra-compact format, aims to conserve discretion in those places where it is impossible to recess the appliances in the ceiling.

Calle N, s/n - Pol. Ind. El Oliveral
46394 Ribarroja del Turia - Valencia (Spain)
info@arkoslight.com - www.arkoslight.com

5 Year GUARANTEE*

Lighting technical data

ARKOSLIGHT

Polar diagram

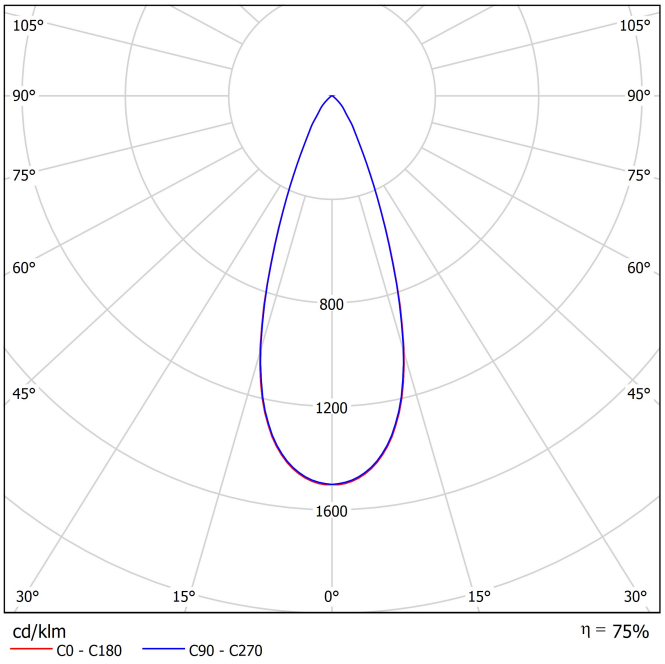

Conical diagram

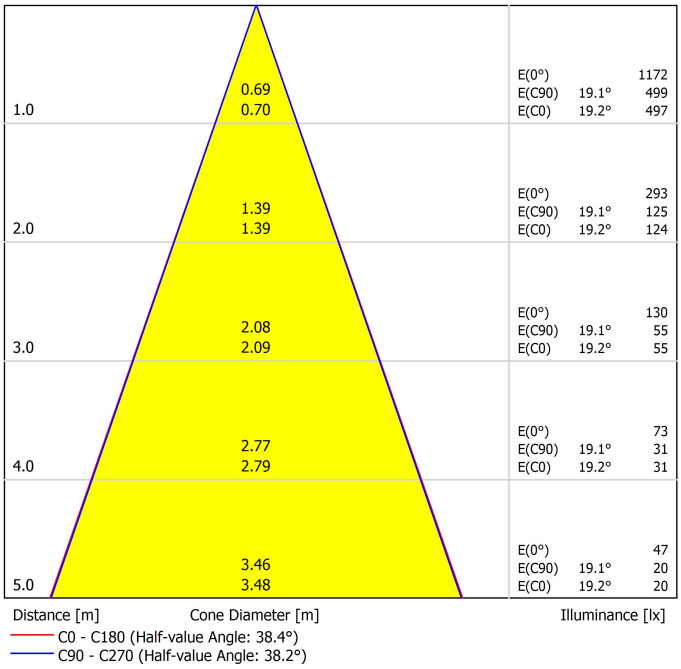

UGR

Glare Evaluation According to UGR

ρ Ceiling		70	70	50	50	30	70	70	50	50	30
ρ Walls		50	30	50	30	30	50	30	50	30	30
ρ Floor		20	20	20	20	20	20	20	20	20	20
Room Size X	Y	Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	8.7	9.4	8.9	9.6	9.8	8.7	9.4	8.9	9.6	9.8
	3H	9.9	10.5	10.2	10.8	11.0	9.9	10.6	10.2	10.8	11.0
	4H	11.1	11.7	11.4	11.9	12.2	11.1	11.7	11.4	12.0	12.2
	6H	11.9	12.5	12.2	12.8	13.0	11.9	12.5	12.3	12.8	13.1
	8H	12.2	12.7	12.5	13.0	13.3	12.2	12.8	12.6	13.1	13.4
	12H	12.4	12.9	12.8	13.2	13.6	12.5	13.0	12.8	13.3	13.6
4H	2H	8.9	9.5	9.2	9.8	10.0	8.9	9.6	9.2	9.8	10.1
	3H	10.7	11.2	11.0	11.5	11.8	10.7	11.2	11.0	11.5	11.8
	4H	12.1	12.5	12.5	12.9	13.2	12.1	12.6	12.5	12.9	13.2
	6H	13.1	13.5	13.5	13.8	14.2	13.1	13.5	13.5	13.9	14.2
	8H	13.5	13.8	13.9	14.2	14.6	13.5	13.8	13.9	14.2	14.6
	12H	13.8	14.0	14.2	14.4	14.9	13.8	14.1	14.2	14.5	14.9
8H	4H	12.6	12.9	13.0	13.3	13.7	12.6	12.9	13.0	13.3	13.7
	6H	13.7	14.0	14.2	14.4	14.9	13.8	14.0	14.2	14.4	14.9
	8H	14.2	14.4	14.6	14.8	15.3	14.2	14.4	14.7	14.9	15.3
	12H	14.6	14.8	15.1	15.2	15.7	14.6	14.8	15.1	15.3	15.8
12H	4H	12.6	12.9	13.1	13.3	13.7	12.7	12.9	13.1	13.3	13.8
	6H	13.8	14.1	14.3	14.5	15.0	13.9	14.1	14.3	14.5	15.0
	8H	14.3	14.5	14.8	15.0	15.5	14.4	14.6	14.9	15.0	15.5

Variation of the observer position for the luminaire distances S

S = 1.0H S = 1.5H S = 2.0H	+2.1 / -2.3 +4.3 / -2.8 +6.1 / -3.3	+2.2 / -2.3 +4.3 / -2.8 +6.1 / -3.3
Standard table	BK02	BK02
Correction Summand	-1.4	-1.4

Corrected Glare Indices referring to 780lm Total Luminous Flux

Calle N, s/n - Pol. Ind. El Oliveral
46394 Ribarroja del Turia - Valencia (Spain)
info@arkoslight.com - www.arkoslight.com

5 Year GUARANTEE*

Ecodesign and Energy Labelling

ARKOSLIGHT



Fuente de luz (LED) reemplazable por un profesional autorizado

Replaceable (LED only) light source by an authorized professional.

Source lumineuse (LED) remplaçable par un professionnel agréé

Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato

Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann

Equipo de control reemplazable por un profesional autorizado

Replaceable control gear by an authorized professional

Dispositif de commande remplaçable par un professionnel agréé

Alimentatore sostituibile da parte di un professionista autorizzato

Auswechselbares Betriebsgerät durch autorisierten Fachmann

Instrucciones para el final de vida y la eliminación de los componentes:
Instructions on end-of-life and component disposal:
Instructions pour la gestion des composants en fin de vie et leur mise au rebut :
Istruzioni per il fine vita e lo smaltimento dei componenti:
Anweisungen zur entsorgung der Leuchtenkomponenten:

Interrumpir la alimentación del aparato
Cut the power supply to the luminaire
Couper l'alimentation du luminaire
Interrompere l'alimentazione dell'apparecchio
Stromversorgung der Leuchte unterbrechen



Quitar la(s) fuente(s) de luz para el desecho
Remove light source(s) for disposal
Retirer la (les) source(s) lumineuse(s) pour l'élimination
Rimuovere la/le sorgente/e di luce per lo smaltimento
Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho
Remove the battery for decommissioning
Retirer la batterie pour sa mise au rebut
Rimuovere la batteria per la dismissione
Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho
Remove control gear for disposal
Retirer le dispositif de commande pour l'élimination
Rimuovere l'alimentatore per lo smaltimento
Betriebsgerät zur Entsorgung ausbauen

Enviar los materiales a un centro de recogida RAEE
Send the materials to a WEEE collection centre
Envoyer les matériaux dans une déchetterie DEEE
Inviare i materiali ad un centro di raccolta RAEE
Die Materialien in einem WEEE-Zentrum entsorgen



Calle N, s/n - Pol. Ind. El Oliveral
46394 Ribarroja del Turia-Valencia (Spain)
info@arkoslight.com - www.arkoslight.com