



Dimensions



Accessories



ADD-ON BEZEL EXCLUDED.
NOT COMPATIBLE.

Awards



| | |
|-----------|---------------------------|
| Name | SWAP M RT 2012 7W 4000K N |
| Reference | A4122212N |
| Colour | Matt black |
| RAL | 9005 |
| Category | CEILING RECESSED |

| | |
|-------------------------|-----------------|
| Type | LED |
| Gross luminous flux | 960 lm |
| Colour temperature | 4000 K |
| Chromatic stability | MacAdam Step 2 |
| Colour Rendering Index | CRI>90 |
| Power | 7 W |
| Current | 200 mA |
| Efficacy | 137 lm/W |
| LED lifespan | L90B10 >55.000h |
| Energy efficiency class | E |

| | |
|---------------------|-----|
| Lighting efficiency | 59% |
| Light beam angle | 46° |

| | |
|-----------------------------|-------------------------|
| Driver | Included - Fast Connect |
| Power values of the system | 8,25 W |
| Frequency | 50/60 Hz |
| Dimming | No Dim |
| Electrical insulation class | □ |

| | |
|---|-------------------------------------|
| Sealing | IP65 |
| Impact resistance | IK07 |
| Recess measurements | Ø75 mm |
| Weight | 215 g |
| Packaged weight | 255 g |
| Packaging dimensions | 147 x 132 x 134 mm |
| Units per package | 1 |
| Materials | Aluminium / Polycarbonate |
| Compatible avec la norme française RT2012 & BBC | Oui. Recouvrable d'isolant déroulé. |

PRODUCT

LIGHT SOURCE

LIGHTING FIXTURE | PHOTOMETRIC DATA


LIGHTING FIXTURE | ELECTRICAL DATA

OTHER DATA



Swap is a ceiling recessed LED spotlight whose main features are its minimalist aspect, its perfect integration into the ceiling, and considerable visual comfort, thanks to the small reflector that is set back with respect to the ceiling plane. When it is switched on, its matte finish shade generates an attractive effect, a discrete circle of light. It includes an add-on bezel that can be used optionally to cover larger recess diameters.


Polar diagram

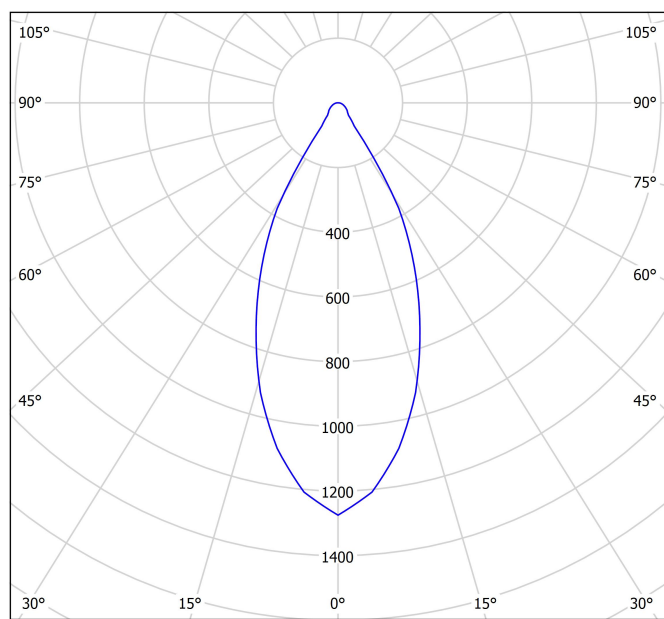

cd/klm
 — C0 - C180 — C90 - C270

η = 81%

Conical diagram

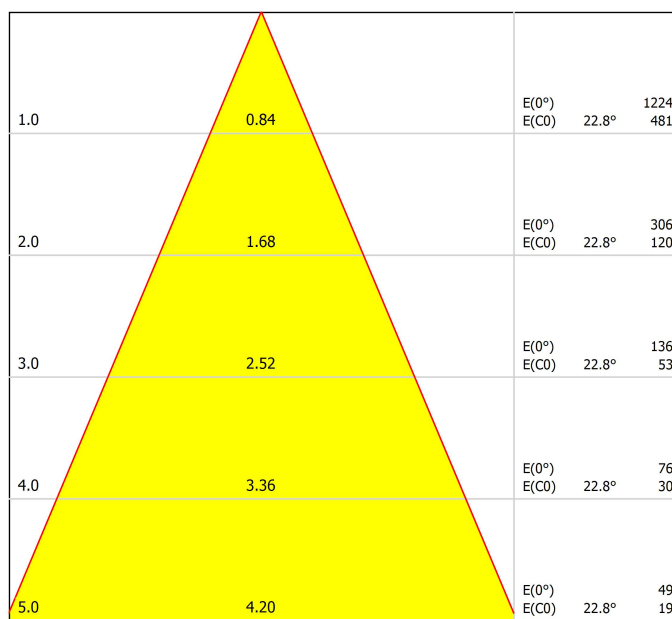

Distance [m] Cone Diameter [m]
 — C0 - C180 (Half-value Angle: 45.6°)

Illuminance [lx]

UGR

| Glare Evaluation According to UGR | | | | | | | | | | | | |
|---|----|--|------|------|------|------|---|------|------|------|------|--|
| p Ceiling | | 70 | 70 | 50 | 50 | 30 | 70 | 70 | 50 | 50 | 30 | |
| p Walls | | 50 | 30 | 50 | 30 | 30 | 50 | 30 | 50 | 30 | 30 | |
| p Floor | | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | |
| Room Size X | Y | Viewing direction at right angles to lamp axis | | | | | Viewing direction parallel to lamp axis | | | | | |
| 2H | 2H | 16.1 | 16.8 | 16.3 | 17.0 | 17.2 | 16.1 | 16.8 | 16.3 | 17.0 | 17.2 | |
| | 3H | 17.9 | 18.6 | 18.2 | 18.8 | 19.1 | 17.9 | 18.6 | 18.2 | 18.8 | 19.1 | |
| | 4H | 18.7 | 19.3 | 19.0 | 19.6 | 19.9 | 18.7 | 19.3 | 19.0 | 19.6 | 19.9 | |
| | 6H | 19.4 | 20.0 | 19.7 | 20.3 | 20.6 | 19.4 | 20.0 | 19.7 | 20.3 | 20.6 | |
| | 8H | 19.7 | 20.3 | 20.1 | 20.6 | 20.9 | 19.7 | 20.3 | 20.1 | 20.6 | 20.9 | |
| 4H | 2H | 16.6 | 17.3 | 16.9 | 17.6 | 17.8 | 16.6 | 17.3 | 16.9 | 17.6 | 17.8 | |
| | 3H | 18.7 | 19.3 | 19.0 | 19.6 | 19.9 | 18.7 | 19.3 | 19.0 | 19.6 | 19.9 | |
| | 4H | 19.7 | 20.2 | 20.0 | 20.5 | 20.8 | 19.7 | 20.2 | 20.0 | 20.5 | 20.8 | |
| | 6H | 20.6 | 21.0 | 21.0 | 21.3 | 21.7 | 20.6 | 21.0 | 21.0 | 21.3 | 21.7 | |
| | 8H | 21.0 | 21.3 | 21.4 | 21.7 | 22.1 | 21.0 | 21.3 | 21.4 | 21.7 | 22.1 | |
| 8H | 2H | 16.6 | 17.3 | 16.9 | 17.6 | 17.8 | 16.6 | 17.3 | 16.9 | 17.6 | 17.8 | |
| | 3H | 18.7 | 19.3 | 19.0 | 19.6 | 19.9 | 18.7 | 19.3 | 19.0 | 19.6 | 19.9 | |
| | 4H | 19.7 | 20.2 | 20.0 | 20.5 | 20.8 | 19.7 | 20.2 | 20.0 | 20.5 | 20.8 | |
| | 6H | 20.6 | 21.0 | 21.0 | 21.3 | 21.7 | 20.6 | 21.0 | 21.0 | 21.3 | 21.7 | |
| | 8H | 21.0 | 21.3 | 21.4 | 21.7 | 22.1 | 21.0 | 21.3 | 21.4 | 21.7 | 22.1 | |
| 12H | 2H | 16.6 | 17.3 | 16.9 | 17.6 | 17.8 | 16.6 | 17.3 | 16.9 | 17.6 | 17.8 | |
| | 3H | 18.7 | 19.3 | 19.0 | 19.6 | 19.9 | 18.7 | 19.3 | 19.0 | 19.6 | 19.9 | |
| | 4H | 19.7 | 20.2 | 20.0 | 20.5 | 20.8 | 19.7 | 20.2 | 20.0 | 20.5 | 20.8 | |
| | 6H | 20.6 | 21.0 | 21.0 | 21.3 | 21.7 | 20.6 | 21.0 | 21.0 | 21.3 | 21.7 | |
| | 8H | 21.0 | 21.3 | 21.4 | 21.7 | 22.1 | 21.0 | 21.3 | 21.4 | 21.7 | 22.1 | |
| Variation of the observer position for the luminaires distances S | | | | | | | | | | | | |
| S = 1.0H | | +1.1 / -0.3 | | | | | +1.1 / -0.3 | | | | | |
| S = 1.5H | | +2.2 / -0.5 | | | | | +2.2 / -0.5 | | | | | |
| S = 2.0H | | +3.5 / -0.8 | | | | | +3.5 / -0.8 | | | | | |
| Standard table | | BK06 | | | | | BK06 | | | | | |
| Correction Summand | | 3.9 | | | | | 3.9 | | | | | |
| Corrected Glare Indices referring to 960lm Total Luminous Flux | | | | | | | | | | | | |



Fuente de luz (LED) reemplazable por un profesional autorizado
 Replaceable (LED only) light source by an authorized professional.
 Source lumineuse (LED) remplaçable par un professionnel agréé
 Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato
 Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado
 Replaceable control gear by an authorized professional
 Dispositif de commande remplaçable par un professionnel agréé
 Alimentatore sostituibile da parte di un professionista autorizzato
 Auswechselbares Betriebsgerät durch autorisierten Fachmann

Instrucciones para el final de vida y la eliminación de los componentes:

Instructions on end-of-life and component disposal:

Instructions pour la gestion des composants en fin de vie et leur mise au rebut :

Istruzioni per il fine vita e lo smaltimento dei componenti:

Anweisungen zur entsorgung der Leuchtenkomponenten:



Interrumpir la alimentación del aparato
 Cut the power supply to the luminaire
 Couper l'alimentation du luminaire
 Interrompere l'alimentazione dell'apparecchio
 Stromversorgung der Leuchte unterbrechen



Quitar la(s) fuente(s) de luz para el desecho
 Remove light source(s) for disposal
 Retirer la (les) source(s) lumineuse(s) pour l'élimination
 Rimuovere la/le sorgente/e di luce per lo smaltimento
 Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho
 Remove the battery for decommissioning
 Retirer la batterie pour sa mise au rebut
 Rimuovere la batteria per la dismissione
 Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho
 Remove control gear for disposal
 Retirer le dispositif de commande pour l'élimination
 Rimuovere l'alimentatore per lo smaltimento
 Betriebsgerät zur Entsorgung ausbauen



Enviar los materiales a un centro de recogida RAEE
 Send the materials to a WEEE collection centre
 Envoyer les matériaux dans une déchetterie DEEE
 Inviare i materiali ad un centro di raccolta RAEE
 Die Materialien in einem WEEE-Zentrum entsorgen

