





## DIMENSIONS

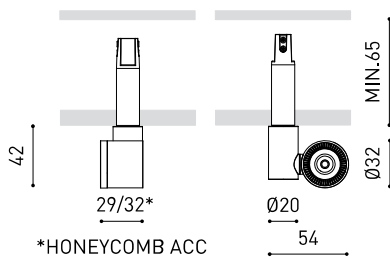

\*HONEYCOMB ACC

## ACCESSORIES

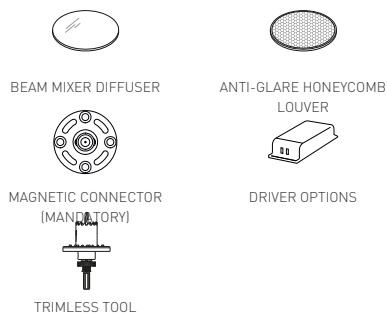

## AWARDS



## PRODUCT

|           |                                    |
|-----------|------------------------------------|
| Name      | MAGNETIC 24V IO MICRO 20° 3000K NT |
| Reference | A4340111NT                         |
| Color     | Textured black                     |
| RAL       | 9005                               |
| Category  | CEILING RECESSED                   |

## LIGHT SOURCE

|                        |                 |
|------------------------|-----------------|
| Type                   | LED             |
| Gross luminous flux    | 550 lm          |
| Colour temperature     | 3000 K          |
| Chromatic stability    | MacAdam Step 2  |
| Colour Rendering Index | CRI>90          |
| Power                  | 4,7 W           |
| Efficacy               | 117 lm/W        |
| LED lifespan           | L90B10 >60.000h |

## LIGHTING FIXTURE | PHOTOMETRIC DATA

|                     |     |
|---------------------|-----|
| Lighting efficiency | 83% |
| Light beam angle    | 20° |

## LIGHTING FIXTURE | ELECTRICAL DATA


|                             |             |
|-----------------------------|-------------|
| Power values of the system  | 5,35 W      |
| Dimming                     | DIM options |
| Electrical insulation class | II          |

## OTHER DATA


|                      |                           |
|----------------------|---------------------------|
| Sealing              | IP20                      |
| Wireless control     | Please Consult            |
| Swivel angle         | 155°                      |
| Rotation angle       | 360°                      |
| Weight               | 60 g                      |
| Packaged weight      | 90 g                      |
| Packaging dimensions | 113 x 77 x 38 mm          |
| Units per package    | 1                         |
| Materials            | Aluminium / Polycarbonate |

iO Magnetic is a LED spotlight miniaturised in a fixture that is so small that it fits on the palm of your hand. Designed for accent lighting applications, its small dimensions mean it can be fitted in display cabinets, shop windows and small places without generating an invasive presence on the scene.

POLAR DIAGRAM

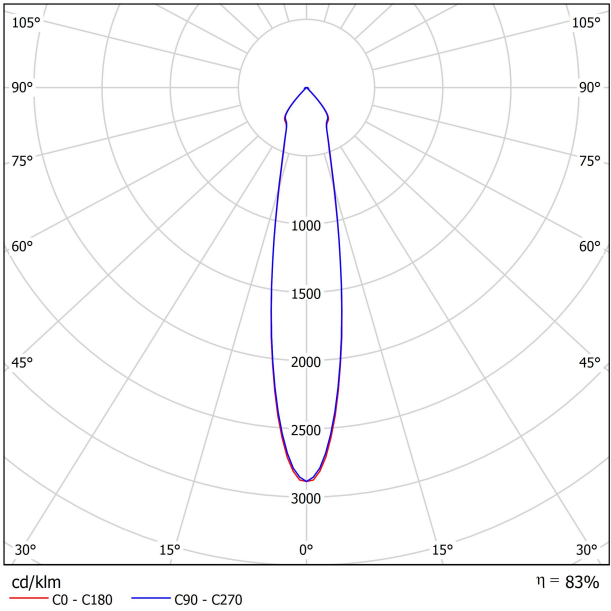

CONICAL DIAGRAM

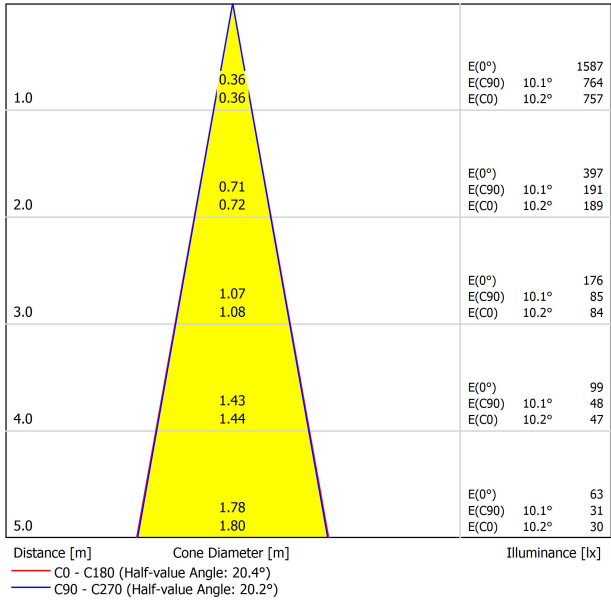




| PRODUCT   |                     |
|-----------|---------------------|
| Model     | Beam Mixer Diffuser |
| Reference | A3870000            |
| Category  | Accessories         |

NOT SOLD SEPARATELY.

The Beam Mixer Diffuser is used to smooth beam artifacts caused by parabolic, Fresnel, or TIR lens collimators without significant broadening.

The unique mixing design provides superior far-field smoothing and color mixing with high on-axis brightness. Compared with traditional diffusers, it maintains higher central beam candlepower (CBCP), and produce less undesirable "field light" at higher angles.



| PRODUCT   |                             |
|-----------|-----------------------------|
| Model     | Anti-glare Honeycomb Louver |
| Reference | A387-00-01 NT               |
| Colour    | NT ■   Textured black       |
| Category  | Accessories                 |

NOT SOLD SEPARATELY.




Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.

# MAGNETIC 24V CONNECTOR


ARKOSLIGHT®

MANDATORY FOR INSTALLATION

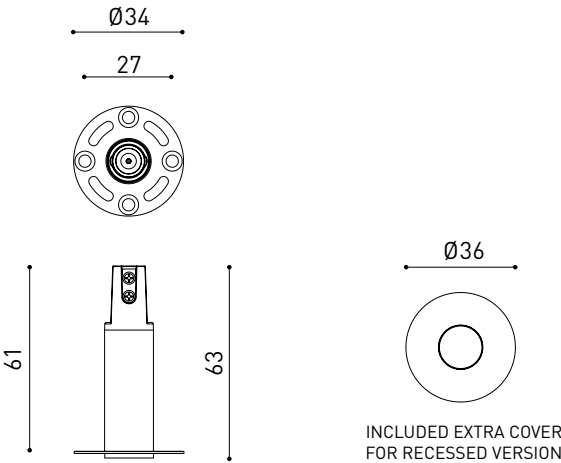

| PRODUCT   |                                                                                                         |
|-----------|---------------------------------------------------------------------------------------------------------|
| Model     | Magnetic connector accessory                                                                            |
| Reference | A435-01- 00   <input type="checkbox"/> W <input type="checkbox"/> N <input checked="" type="checkbox"/> |
| Category  | Accessories                                                                                             |






|                  |        |            | P    | V   | D (A x B x C)   |
|------------------|--------|------------|------|-----|-----------------|
| 24V POWER SUPPLY | ON/OFF | 0434-01-37 | 60W  | 24V | 180 x 52 x 30mm |
|                  |        | 0433-10-22 | 100W | 24V | 295 x 43 x 30mm |

220 V~  
240


MUST BE PLACED ON REMOTE



|            |  |            |           | V   | D (A x B x C)    |
|------------|--|------------|-----------|-----|------------------|
| 24V Dimmer |  | 0433-01-32 | DALI/PUSH | 24V | 181 x 42 x 20mm  |
|            |  | 0433-01-35 | CASAMBI   | 24V | 72,6 x 30 x 18mm |
|            |  | 0434-01-64 | WIFI      | 24V | 105 x 44 x 23mm  |


24V

MUST BE PLACED ON REMOTE



DROP VOLTAGE TABLE

| POWER (W) | CABLE SECTION (mm²) | CABLE LENGHT (m) |
|-----------|---------------------|------------------|
| 60        | 0,75                | 30               |
|           | 1,5                 | 30               |
| 100       | 0,75                | 20               |
|           | 1,5                 | 30               |







INSTALLATION GUIDE  
[https://youtu.be/sa\\_xAgj4ji4](https://youtu.be/sa_xAgj4ji4)



| PRODUCT   |                                   |
|-----------|-----------------------------------|
| Model     | Trimless Tool <b>D16 X D34 MM</b> |
| Reference | A478-00-00                        |
| Category  | Accessories                       |





Fuente de luz (LED) reemplazable por un profesional autorizado

Replaceable (LED only) light source by an authorized professional.

Source lumineuse (LED) remplaçable par un professionnel agréé

Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato

Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado

Replaceable control gear by an authorized professional

Dispositif de commande remplaçable par un professionnel agréé

Alimentatore sostituibile da parte di un professionista autorizzato

Auswechselbares Betriebsgerät durch autorisierten Fachmann

## INSTRUCCIONES PARA EL FINAL DE VIDA Y LA ELIMINACIÓN LOS COMPONENTES

### INSTRUCTIONS ON END-OF-LIFE AND COMPONENT DISPOSAL

### INSTRUCTIONS POUR LA GESTION DES COMPOSANTS EN FIN DE VIE ET LEUR MISE AU REBUT

### ISTRUZIONI PER IL FINE VITA E LO SMALTIMENTO DEI COMPONENTI

### ANWEISUNGEN ZUR ENTSORGUNG DER LEUCHTENKOMPONENTEN



Interrumpir la alimentación del aparato

Cut the power supply to the luminaire

Couper l'alimentation du luminaire

Interrompere l'alimentazione dell'apparecchio

Stromversorgung der Leuchte unterbrechen



Quitar la(s) fuente(s) de luz para el desecho

Remove light source(s) for disposal

Retirer la (les) source(s) lumineuse(s) pour l'élimination

Rimuovere la/le sorgente/e di luce per lo smaltimento

Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho

Remove the battery for decommissioning

Retirer la batterie pour sa mise au rebut

Rimuovere la batteria per la dismissione

Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho

Remove control gear for disposal

Retirer le dispositif de commande pour l'élimination

Rimuovere l'alimentatore per lo smaltimento

Betriebsgerät zur Entsorgung ausbauen

Enviar los materiales a un centro de recogida RAEE

Send the materials to a WEEE collection centre

Envoyer les matériaux dans une déchetterie DEEE

Inviare i materiali ad un centro di raccolta RAEE

Die Materialien in einem WEEE-Zentrum entsorgen

