
# Coco 48V

ARKOSLIGHT



## Größe

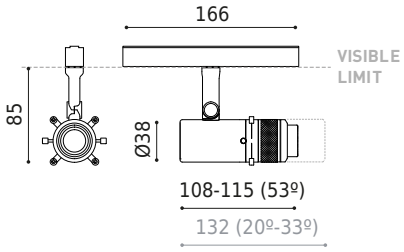


## Zubehör



TRACK 48V OPTIONS

| | |
|---|---|
| | **PRODUKT** |
| Name | COCO SHAPER 48V SHORT 53º DIM CASAMBI 4000K NTW |
| Artikelnummer | A5190612NTW-S |
| Farbe | Schwarz strukturiert - Track Weiß |
| RAL | 9005 |
| Kategorie | TRACK LIGHTS |
| | **LICHTQUELLE** |
| Typ | LED |
| Bruttolichtstrom | 730 lm |
| Farbtemperatur | 4000 K - Andere K, Bitte anfragen |
| Farbstabilität | MacAdam Step 2 |
| Farbwiedergabeindex | CRI>90 |
| Leistung | 6 W |
| Stromstärke | 500 mA |
| Lichtausbeute | 122 lm/W |
| Nutzlebensdauer der LED in Betriebsstunden | L80B10 >60.000h |
| Energieeffizienzklasse | F |
| | **LEUCHTE \| PHOTOMETRISCHE DATEN** |
| Leuchtenwirkungsgrad (LOR) | 37% |
| Abstrahlwinkel | 53° |
| | **LEUCHTE \| ELEKTRISCHE DATEN** |
| Leistungswerte des Systems | 6,86 W |
| Spannung | 48Vdc |
| Helligkeitssteuerung | CASAMBI - Andere DIM, Bitte anfragen |
| Schutzklasse | |
| | **ANDERE DATEN** |
| Dichtigkeit | IP20 |
| Wireless control | Bitte anfragen |
| Schwenkwinkel | 90° |
| Drehwinkel | 360° |
| Schienentyp | Track 48V |
| Gewicht | 260 g |
| Gewicht inkl. Verpackung | 434 g |
| Abmessungen der Verpackung | 200 x 188 x 144 mm |
| Stück pro Verpackung | 1 |
| Materialien | Aluminium / Optical Glas |

CE

Die Familie Coco stellt die neue Leuchte Coco Shaper vor, auf der Suche nach der präzisen Lichtform. Ein kompakter, leistungsstarker und wandlungsfähiger Scheinwerfer, der in der Lage ist, seinen extrem direkten Lichtstrahl durch ein System von verstellbaren Blenden zu formen. Getreu der ästhetischen Sprache seiner Kollektion und mit minimaler Größe für seine Leistung schafft Coco Shaper einzigartige Szenografien, indem es die gewünschte geometrische Kontur projiziert: Kreise, quadratische oder dreieckige Polygone. Erhältlich in einer 48V-Schienen-Version und einer Einbauversion für die punktuelle Oberflächenmontage. Je nach Optik ist er in einer festen Version mit 53º und einer variablen Version von 20º bis 33º erhältlich, was es ermöglicht, nicht nur die Form des Strahls zu modellieren, sondern auch seinen Durchmesser zu wählen.

Calle N, s/n - Pol. Ind. El Oliveral
46394 Ribarroja del Turia - Valencia (Spain)
info@arkoslight.com - www.arkoslight.com




5 Year GUARANTEE*


# Lichttechnische daten

ARKOSLIGHT

## Polar-koordinaten diagramm

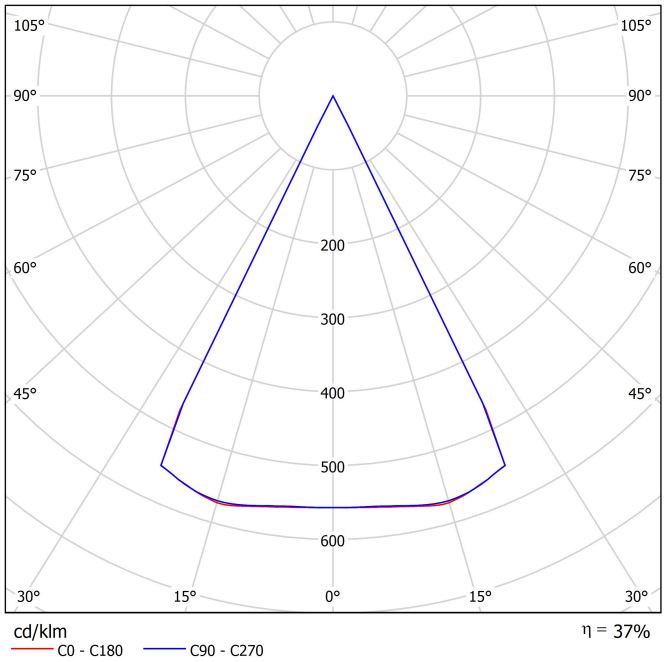


## Kegeldiagramm

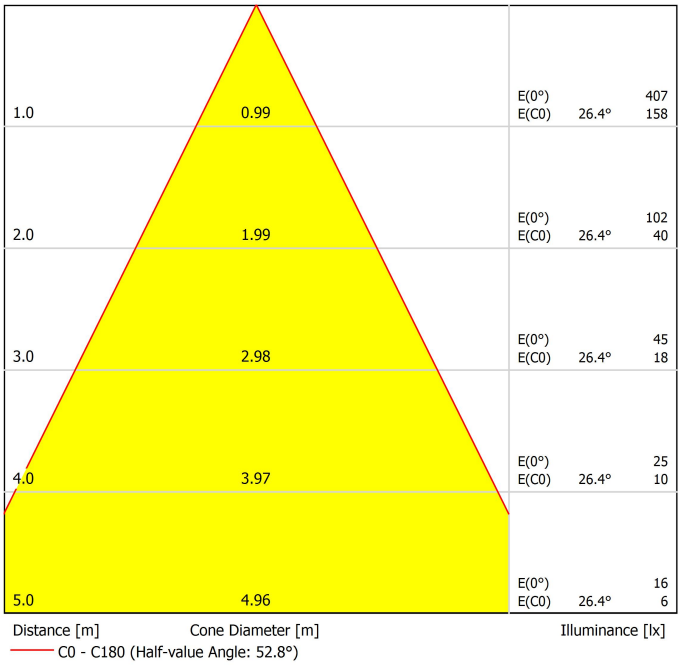


Calle N, s/n - Pol. Ind. El Oliveral
46394 Ribarroja del Turia - Valencia (Spain)
info@arkoslight.com - www.arkoslight.com



5 Year GUARANTEE*

# Track 48V Surface Short

ARKOSLIGHT

48V track lighting systems are low-voltage lighting solutions based on electrified tracks. The track serves both as a physical structure and as a power carrier, allowing light modules to be placed and repositioned as needed, offering flexibility, safety, and energy efficiency. Ideal for projects that demand minimalist design, high performance, and adaptability.

To configure your 48V system, you'll need to combine the following components:

1. Tracks – Available in surface, trimless, surface short, suspended (using suspension accessories with the surface track), and indirect light versions. They form the structural and electrical base of the system.

2. Connectors & Power Supply – Ensure electrical continuity between track sections and provide the 48V power input.


3. Accessories – Including end caps, joiners, mounting elements, and optional installation accessories to complete and secure the setup.




## Track Options

Choose the track version required for your project configuration.

| | |
|---|---|
| TRACK 48V SURFACE SHORT 1m | A338-21-00- \| NT \| WT \| |
| TRACK 48V SURFACE SHORT 2m | A338-22-00- \| NT \| WT \| |
| TRACK 48V SURFACE SHORT 3m | A338-23-00- \| NT \| WT \| |

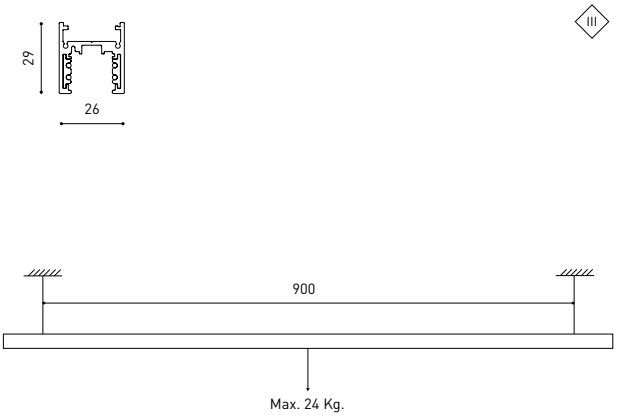


| | |
|---|---|
| TRACK 48V SURFACE SHORT Corner 90º One Plane | A338-24-00- \| NT \| WT \| |
| TRACK 48V SURFACE SHORT T-Joint | A338-25-00- \| NT \| |
| TRACK 48V SURFACE SHORT X-Joint | A338-26-00- \| NT \| |

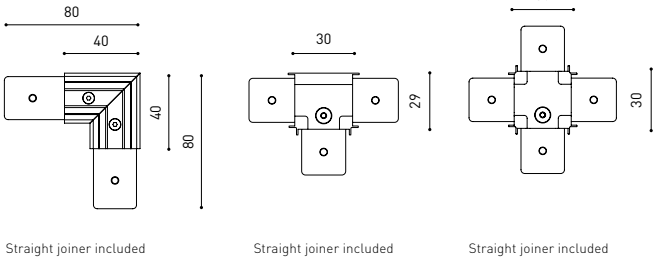



## Complementary track accessories

Use end caps, joiners, and gap covers to connect, close, and cleanly finish your track setup.

| |
|---|
| Short End 48V |
| A338-00-18- \| NT \| WT \| |




| |
|---|
| Surface Straight Joiner 48V |
| A338-00-11 |



| |
|---|
| Short End Feed 48V |
| A338-00-19- \| NT \| WT \| |



| |
|---|
| Cover Gap 1m 48V |
| A338-00-30- \| N \| W \| |



COLOUR | NT ■ RAL 9005 | WT □ RAL 9016 | N ■ RAL 9005 |

Calle N, s/n - Pol. Ind. El Oliveral
46394 Ribarroja del Turia-Valencia (Spain)
info@arkoslight.com - www.arkoslight.com


5 Year GUARANTEE

## Connector options

Connectors are required to provide electrical continuity between tracks, ensuring an uninterrupted 48V flow.


**Live-End Connector 48V**

A338-00-01- | N |





**Central Connector 48V**

A338-00-02- | N |





**T-Joint Connector 48V**

A450-00-07- | N |




**Wireless Control 48V**

0434-01-31- | N | W | Casambi




**Corner 90º Connector One Plane 48V**

A338-00-24- | N | W |





**L-Joint Connector 48V**

A338-00-12- | N |

**X-Joint Connector 48V**

A450-00-08- | N |



Calle N, s/n - Pol. Ind. El Oliveral
46394 Ribarroja del Turia-Valencia (Spain)
info@arkoslight.com - www.arkoslight.com

5 Year GUARANTEE


## Power Supply Options

Select the appropriate power feed to deliver 48V to the system based on your track layout and installation type.


### For all tracks

| Constant Voltage LED POWER SUPPLY | P | V | D (A x B x C) |
|---|---|---|---|
| **0434-01-61*** \| **N** \| **W** \| | 100W | 48V | 298 x 19 x 16mm |
| **0434-01-62** | 150W | 48V | 350 x 30 x 18mm |
| **0434-01-80** | 250W | 48V | 400 x 40 x 22mm |


220 240 V~ | *To be installed inside the track.




**0434-01-61***




**0434-01-62**





**0434-01-80**

DROP VOLTAGE TABLE


| | | CABLE LENGTH (m) | | | |
|---|---|---|---|---|---|
| | | 5 | 10 | 20 | 30 |
| **POWER** (W) | **CABLE SECTION** ($mm^2$) | **TRACK LENGTH** (m) | | | |
| 100 | 0,75 | 50 | 50 | X | X |
| | 1,5 | 50 | 50 | 40 | 25 |
| 150 | 0,75 | 40 | 15 | X | X |
| | 1,5 | 50 | 40 | 20 | X |
| 250 | 0,75 | 20 | X | X | X |
| | 1,5 | 35 | 20 | X | X |

### Connection diagrams:

#### Surface

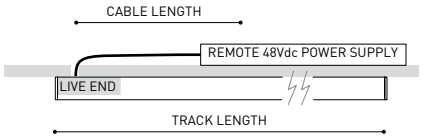



Remote driver installation





Integrated driver installation


#### Suspension

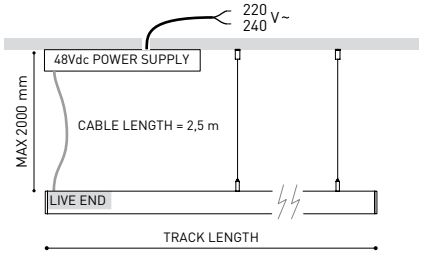


Aside box

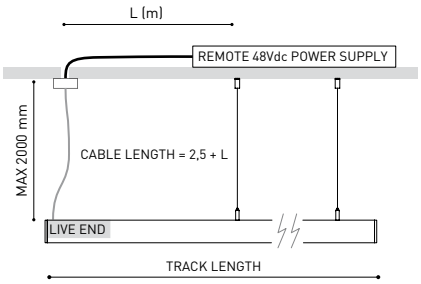


Remote driver installation

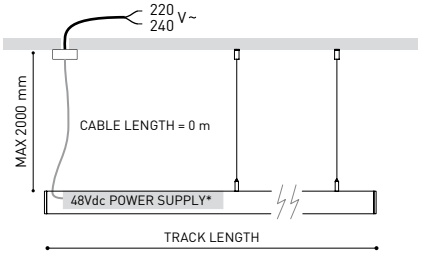


Integrated driver installation

COLOUR | **N** ■ RAL 9005 |

Calle N, s/n - Pol. Ind. El Oliveral
46394 Ribarroja del Turia-Valencia (Spain)
info@arkoslight.com - www.arkoslight.com


5 Year GUARANTEE

# Other accessories

## Suspension components

For a suspended configuration, use surface components together with the following accessories:


| SURFACE Suspension Kit (2 units) 48V |
|---|
| A338-00-15- \| NT \| WT \| |




For suspension aside box installation replace the power supply:


| Wired Power Supply Case 48V | | | | |
|---|---|---|---|---|
| A338-00-25- \| NT \| WT \| | 150W | NO DIM |
| A338-00-26- \| NT \| WT \| | 150W | DIM |

220 240 V~ INCL




Required for remote or integrated driver installation:

| Suspension Feed Kit 48V | | |
|---|---|---|
| A338-00-16- \| N \| W \| | | NO DIM |
| A338-00-17- \| N \| W \| | | DIM |
| | For remote power supply | |
| A338-00-27- \| N \| W \| | | NO DIM |
| A338-00-28- \| N \| W \| | | DIM |
| | For power supply inside the track | |




## Wire trimless accessories

For installing the suspension system cleanly and discreetly — with no visible ceiling boxes or mounting elements.

FEED


| Mains Trimless* | |
|---|---|
| A023-00-01- \| W \| N \| | NO DIM |
| Mains Thick Trimless* | |
| A023-00-02- \| W \| N \| | DIM |


REMOTE INCL Ø20

FASTENING

| Steel Cable Trimless* |
|---|
| A023-00-05- \| W \| N \| |

INCL Ø20





* As many pieces as needed according to your product


## Alternative surface installation

For aside box installation replace the power supply:

| Power Supply Case 48V | | |
|---|---|---|
| A338-00-29- \| NT \| WT \| | 150W | *To be installed aside 48V Surface Tracks |

220 240 V~ INCL



**PRODUCT CONFIGURATOR**

Use our online configurator to design your own custom product layout. The tool will guide you through the process and automatically calculate the required drivers and accessories.

Start your configuration →


COLOUR | NT ■ RAL 9005 | WT □ RAL 9016 | N ■ RAL 9005 | W □ RAL 9016 |

Calle N, s/n - Pol. Ind. El Oliveral
46394 Ribarroja del Turia-Valencia (Spain)
info@arkoslight.com - www.arkoslight.com

5 Year GUARANTEE

# Ecodesign and Energy Labelling

ARKOSLIGHT




Fuente de luz (LED) reemplazable por un profesional autorizado

Replaceable (LED only) light source by an authorized professional.

Source lumineuse (LED) remplaçable par un professionnel agréé

Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato

Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado

Replaceable control gear by an authorized professional

Dispositif de commande remplaçable par un professionnel agréé


Alimentatore sostituibile da parte di un professionista autorizzato

Auswechselbares Betriebsgerät durch autorisierten Fachmann


## Instrucciones para el final de vida y la eliminación de los componentes:
## Instructions on end-of-life and component disposal:
## Instructions pour la gestion des composants en fin de vie et leur mise au rebut :
## Istruzioni per il fine vita e lo smaltimento dei componenti:
## Anweisungen zur entsorgung der Leuchtenkomponenten:




Interrumpir la alimentación del aparato
Cut the power supply to the luminaire
Couper l'alimentation du luminaire
Interrompere l'alimentazione dell'apparecchio
Stromversorgung der Leuchte unterbrechen



Quitar la(s) fuente(s) de luz para el desecho
Remove light source(s) for disposal
Retirer la (les) source(s) lumineuse(s) pour l'élimination
Rimuovere la/le sorgente/e di luce per lo smaltimento
Lichtquelle(n) zur Entsorgung entfernen




Quitar la batería para el desecho
Remove the battery for decommissioning
Retirer la batterie pour sa mise au rebut
Rimuovere la batteria per la dismissione
Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho
Remove control gear for disposal
Retirer le dispositif de commande pour l'élimination
Rimuovere l'alimentatore per lo smaltimento
Betriebsgerät zur Entsorgung ausbauen

Enviar los materiales a un centro de recogida RAEE
Send the materials to a WEEE collection centre
Envoyer les matériaux dans une déchetterie DEEE
Inviare i materiali ad un centro di raccolta RAEE
Die Materialien in einem WEEE-Zentrum entsorgen



Calle N, s/n - Pol. Ind. El Oliveral
46394 Ribarroja del Turia-Valencia (Spain)
info@arkoslight.com - www.arkoslight.com