




## DIMENSIONS



## AWARDS



Name	STRAM PRISMATIC 3 DIM DALI 3000K WT
Reference	A1980341WT
Color	Textured white
RAL	9016
Category	CEILING RECESSED

Type	LED
Gross luminous flux	3025 lm
Colour temperature	3000 K
Chromatic stability	MacAdam Step 2
Colour Rendering Index	CRI > 90
Power	22 W
Current	700 mA
Efficacy	138 lm/W
LED lifespan	L80B10 > 60.000h

Lighting efficiency	87%
Light beam angle	93°

Driver	Included - Connected
Power values of the system	25,58 W
Frequency	50/60 Hz
Dimming	DALI
Electrical insulation class	□

Sealing	IP43/54**
Wireless control	Please Consult
Emergency power supply	Please Consult
Impact resistance	IK07
Recess measurements	Ø205 mm
Weight	1090 g
Packaged weight	1255,1 g
Packaging dimensions	332 x 245 x 84 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate

## PRODUCT

## LIGHT SOURCE

## LIGHTING FIXTURE | PHOTOMETRIC DATA


## LIGHTING FIXTURE | ELECTRICAL DATA

## OTHER DATA



Ceiling recessed downlight, with a prominent bezel and textured finish, for general lighting functions with diffuse light. Its differentiated aesthetics provide distinction in spaces where it is fitted, considerably different to the traditional round downlight.

## POLAR DIAGRAM

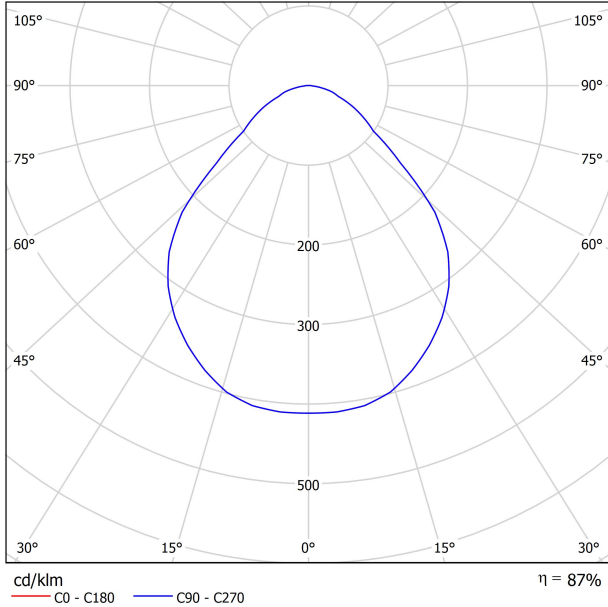

## CONICAL DIAGRAM

## UGR

Glare Evaluation According to UGR											
ρ Ceiling		70	70	50	50	30	70	70	50	50	30
ρ Walls		50	30	50	30	30	50	30	50	30	30
ρ Floor		20	20	20	20	20	20	20	20	20	20
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	19.7	20.9	20.0	21.1	21.3	19.7	20.9	20.0	21.1	21.3
	3H	21.0	22.0	21.3	22.3	22.5	21.0	22.0	21.3	22.3	22.5
	4H	21.6	22.5	21.9	22.8	23.1	21.6	22.5	21.9	22.8	23.1
	6H	21.9	22.8	22.3	23.1	23.4	21.9	22.8	22.3	23.1	23.4
	8H	22.0	22.9	22.4	23.2	23.5	22.0	22.9	22.4	23.2	23.5
	12H	22.1	22.9	22.4	23.2	23.5	22.1	22.9	22.4	23.2	23.5
4H	2H	20.2	21.2	20.5	21.4	21.7	20.2	21.2	20.5	21.4	21.7
	3H	21.7	22.5	22.0	22.8	23.1	21.7	22.5	22.0	22.8	23.1
	4H	22.4	23.1	22.8	23.4	23.8	22.4	23.1	22.8	23.4	23.8
	6H	22.9	23.5	23.3	23.9	24.2	22.9	23.5	23.3	23.9	24.2
	8H	23.0	23.6	23.4	24.0	24.4	23.0	23.6	23.4	24.0	24.4
	12H	23.1	23.6	23.5	24.0	24.4	23.1	23.6	23.5	24.0	24.4
8H	4H	22.6	23.2	23.0	23.6	24.0	22.6	23.2	23.0	23.6	24.0
	6H	23.2	23.7	23.7	24.1	24.6	23.2	23.7	23.7	24.1	24.6
	8H	23.4	23.8	23.9	24.3	24.7	23.4	23.8	23.9	24.3	24.7
	12H	23.5	23.8	24.0	24.3	24.8	23.5	23.8	24.0	24.3	24.8
12H	4H	22.6	23.1	23.1	23.5	24.0	22.6	23.1	23.1	23.5	24.0
	6H	23.3	23.7	23.7	24.1	24.6	23.3	23.7	23.7	24.1	24.6
	8H	23.5	23.8	24.0	24.3	24.8	23.5	23.8	24.0	24.3	24.8
	12H	23.5	23.8	24.0	24.3	24.8	23.5	23.8	24.0	24.3	24.8
Variation of the observer position for the luminaire distances S											
S = 1.0H	+0.5 / -0.6					+0.5 / -0.6					
S = 1.5H	+0.8 / -0.9					+0.8 / -0.9					
S = 2.0H	+1.7 / -1.5					+1.7 / -1.5					
Standard table	BK03					BK03					
Correction Summand	1.7					1.7					
Corrected Glare Indices referring to 3025lm Total Luminous Flux											



Fuente de luz (LED) reemplazable por un profesional autorizado  
Replaceable (LED only) light source by an authorized professional.  
Source lumineuse (LED) remplaçable par un professionnel agréé  
Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato  
Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado  
Replaceable control gear by an authorized professional  
Dispositif de commande remplaçable par un professionnel agréé  
Alimentatore sostituibile da parte di un professionista autorizzato  
Auswechselbares Betriebsgerät durch autorisierten Fachmann

INSTRUCCIONES PARA EL FINAL DE VIDA Y LA ELIMINACIÓN LOS COMPONENTES  
INSTRUCTIONS ON END-OF-LIFE AND COMPONENT DISPOSAL  
INSTRUCTIONS POUR LA GESTION DES COMPOSANTS EN FIN DE VIE ET LEUR MISE AU REBUT  
ISTRUZIONI PER IL FINE VITA E LO SMALTIMENTO DEI COMPONENTI  
ANWEISUNGEN ZUR ENTSORGUNG DER LEUCHTENKOMPONENTEN



Interrumpir la alimentación del aparato  
Cut the power supply to the luminaire  
Couper l'alimentation du luminaire  
Interrompere l'alimentazione dell'apparecchio  
Stromversorgung der Leuchte unterbrechen



Quitar la(s) fuente(s) de luz para el desecho  
Remove light source(s) for disposal  
Retirer la (les) source(s) lumineuse(s) pour l'élimination  
Rimuovere la/le sorgente/e di luce per lo smaltimento  
Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho  
Remove the battery for decommissioning  
Retirer la batterie pour sa mise au rebut  
Rimuovere la batteria per la dismissione  
Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho  
Remove control gear for disposal  
Retirer le dispositif de commande pour l'élimination  
Rimuovere l'alimentatore per lo smaltimento  
Betriebsgerät zur Entsorgung ausbauen

Enviar los materiales a un centro de recogida RAEE  
Send the materials to a WEEE collection centre  
Envoyer les matériaux dans une déchetterie DEEE  
Inviare i materiali ad un centro di raccolta RAEE  
Die Materialien in einem WEEE-Zentrum entsorgen

