




Dimensions



Name	GAP 5W 2700K W
Reference	A1710110W
Color	Matt white
RAL	9016
Category	CEILING RECESSED

Type	LED
Gross luminous flux	700 lm
Colour temperature	2700 K
Chromatic stability	MacAdam Step 2
Colour Rendering Index	CRI>80
Power	5 W
Current	140 mA
Efficacy	140 lm/W
LED lifespan	L80B10 >60.000h
Energy efficiency class	E

Lighting efficiency	80%
Light beam angle	38°

Driver	Included - Fast Connect
Power values of the system	5,92 W
Frequency	50/60 Hz
Dimming	No Dim
Electrical insulation class	☐

Sealing	IP20
Wireless control	Please Consult
Emergency power supply	Please Consult
Recess measurements	Ø90 mm
Weight	300 g
Packaged weight	416,4 g
Packaging dimensions	122.5 x 121.5 x 74 mm
Units per package	1
Materials	Aluminium

PRODUCT

LIGHT SOURCE

LIGHTING FIXTURE | PHOTOMETRIC DATA


LIGHTING FIXTURE | ELECTRICAL DATA

OTHER DATA



Minimum bezel and great visual comfort, thanks to its sunken light source. That, along with the luminary's matt white shade means that Gap can be fitted with its presence going unnoticed.


Polar diagram

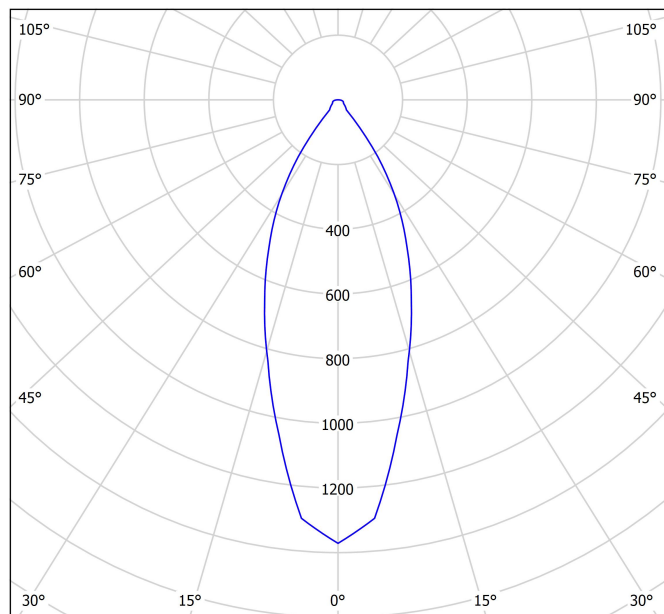

cd/klm
— C0 - C180 — C90 - C270

η = 80%

Conical diagram

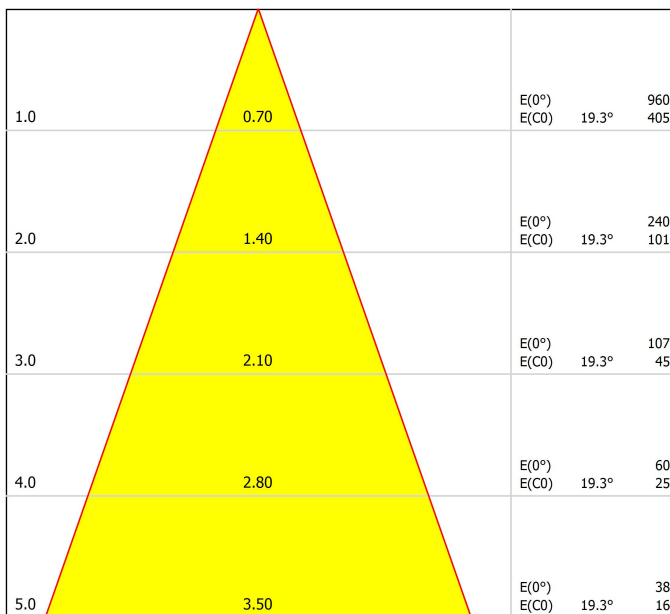

Distance [m] Cone Diameter [m]
— C0 - C180 (Half-value Angle: 38.6°)

Illuminance [lx]

UGR

Glare Evaluation According to UGR

p Ceiling		70	70	50	50	30	70	70	50	50	30
p Walls		50	30	50	30	30	50	30	50	30	30
p Floor		20	20	20	20	20	20	20	20	20	20
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	10.7	11.5	10.9	11.7	11.9	10.7	11.5	10.9	11.7	11.9
	3H	13.6	14.3	13.9	14.6	14.8	13.6	14.3	13.9	14.6	14.8
	4H	15.0	15.7	15.3	16.0	16.2	15.0	15.7	15.3	16.0	16.2
	6H	16.3	16.9	16.7	17.2	17.5	16.3	16.9	16.7	17.2	17.5
	8H	16.9	17.5	17.2	17.8	18.1	16.9	17.5	17.2	17.8	18.1
4H	12H	17.3	17.9	17.7	18.2	18.5	17.3	17.9	17.7	18.2	18.5
	2H	11.6	12.3	11.9	12.5	12.8	11.6	12.3	11.9	12.5	12.8
	3H	14.8	15.3	15.1	15.6	16.0	14.8	15.3	15.1	15.6	16.0
	4H	16.4	16.8	16.7	17.2	17.5	16.4	16.8	16.7	17.2	17.5
	6H	17.8	18.2	18.2	18.6	19.0	17.8	18.2	18.2	18.6	19.0
8H	8H	18.4	18.8	18.8	19.2	19.6	18.4	18.8	18.8	19.2	19.6
	12H	19.0	19.3	19.4	19.7	20.1	19.0	19.3	19.4	19.7	20.1
	4H	17.0	17.3	17.4	17.7	18.1	17.0	17.3	17.4	17.7	18.1
	6H	18.6	18.9	19.1	19.3	19.8	18.6	18.9	19.1	19.3	19.8
	8H	19.4	19.6	19.8	20.0	20.5	19.4	19.6	19.8	20.0	20.5
12H	12H	20.1	20.3	20.5	20.7	21.2	20.1	20.3	20.5	20.7	21.2
	4H	17.1	17.4	17.5	17.8	18.2	17.1	17.4	17.5	17.8	18.2
	6H	18.8	19.0	19.3	19.5	19.9	18.8	19.0	19.3	19.5	19.9
	8H	19.6	19.8	20.1	20.3	20.8	19.6	19.8	20.1	20.3	20.8
	Variation of the observer position for the luminaire distances S										
S = 1.0H		+1.2 / -0.4					+1.2 / -0.4				
S = 1.5H		+2.5 / -0.6					+2.5 / -0.6				
S = 2.0H		+3.8 / -0.8					+3.8 / -0.8				
Standard table		BK07					BK07				
Correction Summand		2.7					2.7				
Corrected Glare Indices referring to 700lm Total Luminous Flux											



Fuente de luz (LED) reemplazable por un profesional autorizado

Replaceable (LED only) light source by an authorized professional.

Source lumineuse (LED) remplaçable par un professionnel agréé

Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato

Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado

Replaceable control gear by an authorized professional

Dispositif de commande remplaçable par un professionnel agréé

Alimentatore sostituibile da parte di un professionista autorizzato

Auswechselbares Betriebsgerät durch autorisierten Fachmann

Instrucciones para el final de vida y la eliminación de los componentes:

Instructions on end-of-life and component disposal:

Instructions pour la gestion des composants en fin de vie et leur mise au rebut :

Istruzioni per il fine vita e lo smaltimento dei componenti:

Anweisungen zur entsorgung der Leuchtenkomponenten:



Interrumpir la alimentación del aparato
Cut the power supply to the luminaire
Couper l'alimentation du luminaire
Interrompere l'alimentazione dell'apparecchio
Stromversorgung der Leuchte unterbrechen



Quitar la(s) fuente(s) de luz para el desecho
Remove light source(s) for disposal
Retirer la (les) source(s) lumineuse(s) pour l'élimination
Rimuovere la/le sorgente/e di luce per lo smaltimento
Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho
Remove the battery for decommissioning
Retirer la batterie pour sa mise au rebut
Rimuovere la batteria per la dismissione
Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho
Remove control gear for disposal
Retirer le dispositif de commande pour l'élimination
Rimuovere l'alimentatore per lo smaltimento
Betriebsgerät zur Entsorgung ausbauen

Enviar los materiales a un centro de recogida RAEE
Send the materials to a WEEE collection centre
Envoyer les matériaux dans une déchetterie DEEE
Inviare i materiali ad un centro di raccolta RAEE
Die Materialien in einem WEEE-Zentrum entsorgen

