




DIMENSIONS



Name	MADISON 1 DIM DALI 3000K W
Reference	A1900141W
Color	Matt white
RAL	9010
Category	CEILING RECESSED

PRODUCT

Type	LED
Gross luminous flux	1650 lm
Colour temperature	3000 K
Chromatic stability	MacAdam Step 2
Colour Rendering Index	CRI > 90
Power	10,5 W
Current	350 mA
Efficacy	157 lm/W
LED lifespan	L80B10 > 60.000h

LIGHT SOURCE

Lighting efficiency	82%
Light beam angle	100°

LIGHTING FIXTURE | PHOTOMETRIC DATA

Driver	Included - Connected
Power values of the system	12,95 W
Frequency	50/60 Hz
Dimming	DALI
Electrical insulation class	□

LIGHTING FIXTURE | ELECTRICAL DATA


Sealing	IP43
Wireless control	Please Consult
Emergency power supply	Please Consult
Impact resistance	IK07
Recess measurements	205 x 205 mm
Weight	1250 g
Packaged weight	1480,7 g
Packaging dimensions	332 x 245 x 84 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate

OTHER DATA



A squared recessed downlight in which the narrowness and the reduced width of its frame are the differentiating hallmarks of this elegant luminaire.

POLAR DIAGRAM

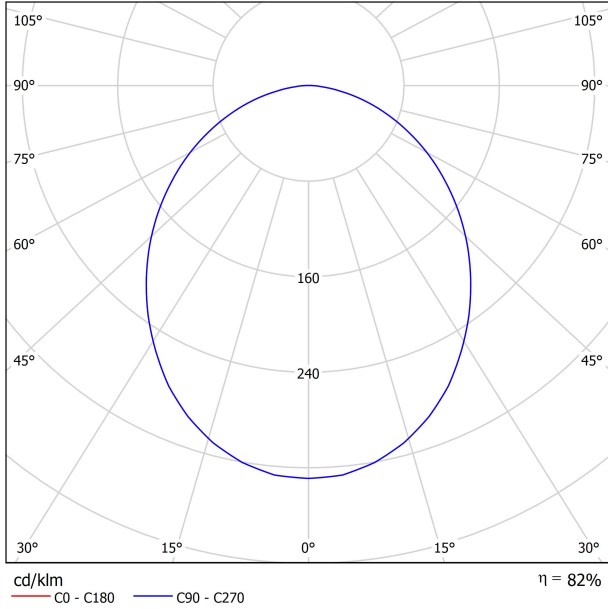

CONICAL DIAGRAM

UGR

Glare Evaluation According to UGR											
ρ Ceiling	70	70	50	50	30	70	70	50	50	30	
ρ Walls	50	30	50	30	30	50	30	50	30	30	
ρ Floor	20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	20.9	22.1	21.2	22.4	22.6	20.9	22.1	21.2	22.4	22.6
	3H	22.5	23.7	22.8	23.9	24.2	22.5	23.7	22.8	23.9	24.2
	4H	23.1	24.2	23.5	24.5	24.8	23.1	24.2	23.5	24.5	24.8
	6H	23.5	24.5	23.9	24.9	25.2	23.5	24.5	23.9	24.9	25.2
	8H	23.7	24.6	24.0	24.9	25.3	23.7	24.6	24.0	24.9	25.3
4H	12H	23.7	24.7	24.1	25.0	25.3	23.7	24.7	24.1	25.0	25.3
	2H	21.4	22.5	21.7	22.8	23.1	21.4	22.5	21.7	22.8	23.1
	3H	23.3	24.2	23.7	24.5	24.9	23.3	24.2	23.7	24.5	24.9
	4H	24.0	24.9	24.4	25.2	25.6	24.0	24.9	24.4	25.2	25.6
	6H	24.5	25.3	25.0	25.6	26.0	24.5	25.3	25.0	25.6	26.0
8H	8H	24.7	25.4	25.2	25.8	26.2	24.7	25.4	25.2	25.8	26.2
	12H	24.8	25.4	25.3	25.8	26.3	24.8	25.4	25.3	25.8	26.3
	4H	24.3	25.0	24.7	25.3	25.8	24.3	25.0	24.7	25.3	25.8
	6H	24.9	25.5	25.4	25.9	26.4	24.9	25.5	25.4	25.9	26.4
	8H	25.2	25.6	25.7	26.1	26.6	25.2	25.6	25.7	26.1	26.6
12H	12H	25.3	25.7	25.8	26.2	26.7	25.3	25.7	25.8	26.2	26.7
	4H	24.3	24.9	24.8	25.3	25.8	24.3	24.9	24.8	25.3	25.8
	6H	25.0	25.5	25.5	25.9	26.4	25.0	25.5	25.5	25.9	26.4
8H	25.3	25.7	25.7	26.1	26.6	25.3	25.7	25.7	26.1	26.6	
Variation of the observer position for the luminaire distances S											
S = 1.0H	+0.1 / -0.1					+0.1 / -0.1					
S = 1.5H	+0.2 / -0.4					+0.2 / -0.4					
S = 2.0H	+0.4 / -0.7					+0.4 / -0.7					
Standard table	BK05					BK05					
Correction Summand	5.3					5.3					
Corrected Glare Indices referring to 1650lm Total Luminous Flux											



Fuente de luz (LED) reemplazable por un profesional autorizado

Replaceable (LED only) light source by an authorized professional.

Source lumineuse (LED) remplaçable par un professionnel agréé

Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato

Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado

Replaceable control gear by an authorized professional

Dispositif de commande remplaçable par un professionnel agréé

Alimentatore sostituibile da parte di un professionista autorizzato

Auswechselbares Betriebsgerät durch autorisierten Fachmann

INSTRUCCIONES PARA EL FINAL DE VIDA Y LA ELIMINACIÓN LOS COMPONENTES

INSTRUCTIONS ON END-OF-LIFE AND COMPONENT DISPOSAL

INSTRUCTIONS POUR LA GESTION DES COMPOSANTS EN FIN DE VIE ET LEUR MISE AU REBUT

ISTRUZIONI PER IL FINE VITA E LO SMALTIMENTO DEI COMPONENTI

ANWEISUNGEN ZUR ENTSORGUNG DER LEUCHTENKOMPONENTEN



Interrumpir la alimentación del aparato

Cut the power supply to the luminaire

Couper l'alimentation du luminaire

Interrompere l'alimentazione dell'apparecchio

Stromversorgung der Leuchte unterbrechen



Quitar la(s) fuente(s) de luz para el desecho

Remove light source(s) for disposal

Retirer la (les) source(s) lumineuse(s) pour l'élimination

Rimuovere la/le sorgente/e di luce per lo smaltimento

Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho

Remove the battery for decommissioning

Retirer la batterie pour sa mise au rebut

Rimuovere la batteria per la dismissione

Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho

Remove control gear for disposal

Retirer le dispositif de commande pour l'élimination

Rimuovere l'alimentatore per lo smaltimento

Betriebsgerät zur Entsorgung ausbauen



Enviar los materiales a un centro de recogida RAEE

Send the materials to a WEEE collection centre

Envoyer les matériaux dans une déchetterie DEEE

Inviare i materiali ad un centro di raccolta RAEE

Die Materialien in einem WEEE-Zentrum entsorgen

