



DIMENSIONS



AWARDS



Name	STRAM PRISMATIC 4 DIM PUSH 3000K WT
Reference	A1980421WT
Color	Textured white
RAL	9016
Category	CEILING RECESSED

Type	LED
Gross luminous flux	4050 lm
Colour temperature	3000 K
Chromatic stability	MacAdam Step 2
Colour Rendering Index	CRI > 90
Power	27 W
Current	700 mA
Efficacy	150 lm/W
LED lifespan	L80B10 > 60.000h

Lighting efficiency	89%
Light beam angle	93°

Driver	Included - Connected
Power values of the system	30,82 W
Frequency	50/60 Hz
Dimming	Push
Electrical insulation class	□

Sealing	IP43/54**
Wireless control	Please Consult
Emergency power supply	Please Consult
Impact resistance	IK07
Recess measurements	Ø205 mm
Weight	1090 g
Packaged weight	1255,1 g
Packaging dimensions	332 x 245 x 84 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




OTHER DATA

Sealing	IP43/54**
Wireless control	Please Consult
Emergency power supply	Please Consult
Impact resistance	IK07
Recess measurements	Ø205 mm
Weight	1090 g
Packaged weight	1255,1 g
Packaging dimensions	332 x 245 x 84 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate

Ceiling recessed downlight, with a prominent bezel and textured finish, for general lighting functions with diffuse light. Its differentiated aesthetics provide distinction in spaces where it is fitted, considerably different to the traditional round downlight.

POLAR DIAGRAM

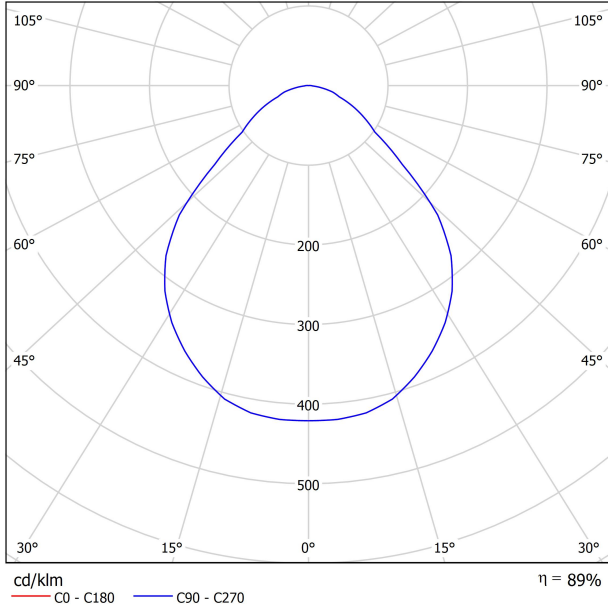

CONICAL DIAGRAM

UGR

Glare Evaluation According to UGR											
p Ceiling		70	70	50	50	30	70	70	50	50	30
p Walls		50	30	50	30	30	50	30	50	30	30
p Floor		20	20	20	20	20	20	20	20	20	20
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	20.8	22.0	21.1	22.2	22.4	20.8	22.0	21.1	22.2	22.4
	3H	22.1	23.1	22.4	23.4	23.6	22.1	23.1	22.4	23.4	23.6
	4H	22.7	23.6	23.0	23.9	24.2	22.7	23.6	23.0	23.9	24.2
	6H	23.0	23.9	23.4	24.2	24.5	23.0	23.9	23.4	24.2	24.5
	8H	23.1	24.0	23.5	24.3	24.6	23.1	24.0	23.5	24.3	24.6
	12H	23.2	24.0	23.5	24.3	24.6	23.2	24.0	23.5	24.3	24.6
4H	2H	21.3	22.2	21.6	22.5	22.8	21.3	22.2	21.6	22.5	22.8
	3H	22.8	23.6	23.1	23.9	24.2	22.8	23.6	23.1	23.9	24.2
	4H	23.5	24.2	23.9	24.5	24.9	23.5	24.2	23.9	24.5	24.9
	6H	24.0	24.6	24.4	24.9	25.3	24.0	24.6	24.4	24.9	25.3
	8H	24.1	24.7	24.5	25.0	25.5	24.1	24.7	24.5	25.0	25.5
	12H	24.2	24.7	24.6	25.1	25.5	24.2	24.7	24.6	25.1	25.5
8H	4H	23.7	24.3	24.1	24.7	25.1	23.7	24.3	24.1	24.7	25.1
	6H	24.3	24.8	24.8	25.2	25.6	24.3	24.8	24.8	25.2	25.6
	8H	24.5	24.9	25.0	25.4	25.8	24.5	24.9	25.0	25.4	25.8
	12H	24.6	24.9	25.1	25.4	25.9	24.6	24.9	25.1	25.4	25.9
12H	4H	23.7	24.2	24.2	24.6	25.1	23.7	24.2	24.2	24.6	25.1
	6H	24.4	24.7	24.8	25.2	25.7	24.4	24.7	24.8	25.2	25.7
	8H	24.6	24.9	25.1	25.4	25.9	24.6	24.9	25.1	25.4	25.9
Variation of the observer position for the luminaire distances S											
S = 1.0H		+0.5 / -0.6					+0.5 / -0.6				
S = 1.5H		+0.8 / -0.9					+0.8 / -0.9				
S = 2.0H		+1.7 / -1.5					+1.7 / -1.5				
Standard table		BK03					BK03				
Correction Summand		1.8					1.8				
Corrected Glare Indices referring to 4050lm Total Luminous Flux											



Fuente de luz (LED) reemplazable por un profesional autorizado

Replaceable (LED only) light source by an authorized professional.

Source lumineuse (LED) remplaçable par un professionnel agréé

Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato

Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado

Replaceable control gear by an authorized professional

Dispositif de commande remplaçable par un professionnel agréé

Alimentatore sostituibile da parte di un professionista autorizzato

Auswechselbares Betriebsgerät durch autorisierten Fachmann

INSTRUCCIONES PARA EL FINAL DE VIDA Y LA ELIMINACIÓN LOS COMPONENTES
 INSTRUCTIONS ON END-OF-LIFE AND COMPONENT DISPOSAL
 INSTRUCTIONS POUR LA GESTION DES COMPOSANTS EN FIN DE VIE ET LEUR MISE AU REBUT
 ISTRUZIONI PER IL FINE VITA E LO SMALTIMENTO DEI COMPONENTI
 ANWEISUNGEN ZUR ENTSORGUNG DER LEUCHTENKOMPONENTEN



Interrumpir la alimentación del aparato
 Cut the power supply to the luminaire
 Couper l'alimentation du luminaire
 Interrompere l'alimentazione dell'apparecchio
 Stromversorgung der Leuchte unterbrechen



Quitar la(s) fuente(s) de luz para el desecho
 Remove light source(s) for disposal
 Retirer la (les) source(s) lumineuse(s) pour l'élimination
 Rimuovere la/le sorgente/e di luce per lo smaltimento
 Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho
 Remove the battery for decommissioning
 Retirer la batterie pour sa mise au rebut
 Rimuovere la batteria per la dismissione
 Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho
 Remove control gear for disposal
 Retirer le dispositif de commande pour l'élimination
 Rimuovere l'alimentatore per lo smaltimento
 Betriebsgerät zur Entsorgung ausbauen

Enviar los materiales a un centro de recogida RAEE
 Send the materials to a WEEE collection centre
 Envoyer les matériaux dans une déchetterie DEEE
 Inviare i materiali ad un centro di raccolta RAEE
 Die Materialien in einem WEEE-Zentrum entsorgen

