




## Dimensions



## Accessories



IP65 ACCESSORY



ADD-ON BEZEL



FLAT SPRING ACCESSORY

## Awards



reddot design award  
winner 2015



## PRODUCT

|           |                                 |
|-----------|---------------------------------|
| Name      | SWAP L 7W DIM DALI/PUSH 3000K Z |
| Reference | A2123231Z                       |
| Color     | Aluminium                       |
| RAL       | 9006                            |
| Category  | CEILING RECESSED                |

## LIGHT SOURCE

|                         |                 |
|-------------------------|-----------------|
| Type                    | LED             |
| Gross luminous flux     | 940 lm          |
| Colour temperature      | 3000 K          |
| Chromatic stability     | MacAdam Step 2  |
| Colour Rendering Index  | CRI>90          |
| Power                   | 7 W             |
| Current                 | 200 mA          |
| Efficacy                | 134 lm/W        |
| LED lifespan            | L90B10 >55.000h |
| Energy efficiency class | E               |

## LIGHTING FIXTURE | PHOTOMETRIC DATA

|                     |     |
|---------------------|-----|
| Lighting efficiency | 78% |
| Light beam angle    | 40° |

## LIGHTING FIXTURE | ELECTRICAL DATA

|                             |                                         |
|-----------------------------|-----------------------------------------|
| Driver                      | Included - Fast Connect                 |
| Power values of the system  | 8,79 W                                  |
| Frequency                   | 50/60 Hz                                |
| Dimming                     | DALI / Push - Other DIM, please consult |
| Electrical insulation class | □                                       |


## OTHER DATA

|                        |                           |
|------------------------|---------------------------|
| Sealing                | IP20                      |
| Wireless control       | Please Consult            |
| Emergency power supply | Please Consult            |
| Impact resistance      | IK07                      |
| Recess measurements    | Ø85 mm                    |
| Weight                 | 245 g                     |
| Packaged weight        | 292,5 g                   |
| Packaging dimensions   | 147 x 132 x 134 mm        |
| Units per package      | 1                         |
| Materials              | Aluminium / Polycarbonate |




Swap is a ceiling recessed LED spotlight whose main features are its minimalist aspect, its perfect integration into the ceiling, and considerable visual comfort, thanks to the small reflector that is set back with respect to the ceiling plane. When it is switched on, its matte finish shade generates an attractive effect, a discrete circle of light. It includes an add-on bezel that can be used optionally to cover larger recess diameters.

## Polar diagram

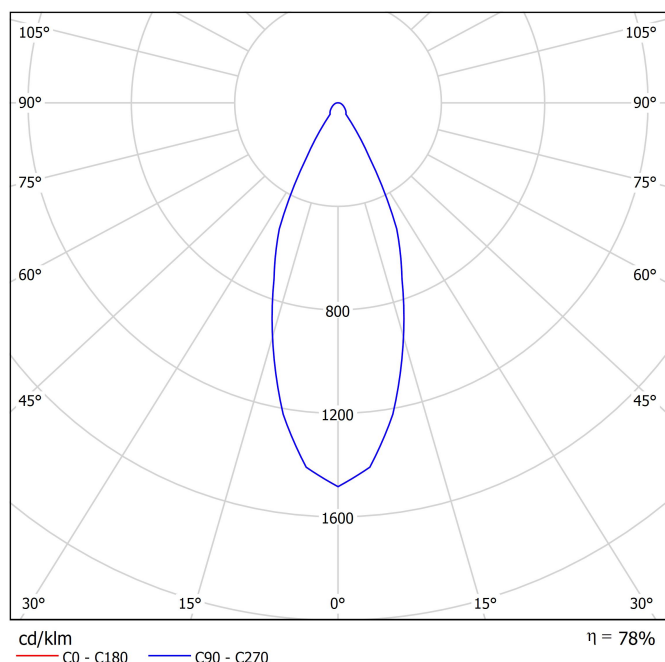


## Conical diagram

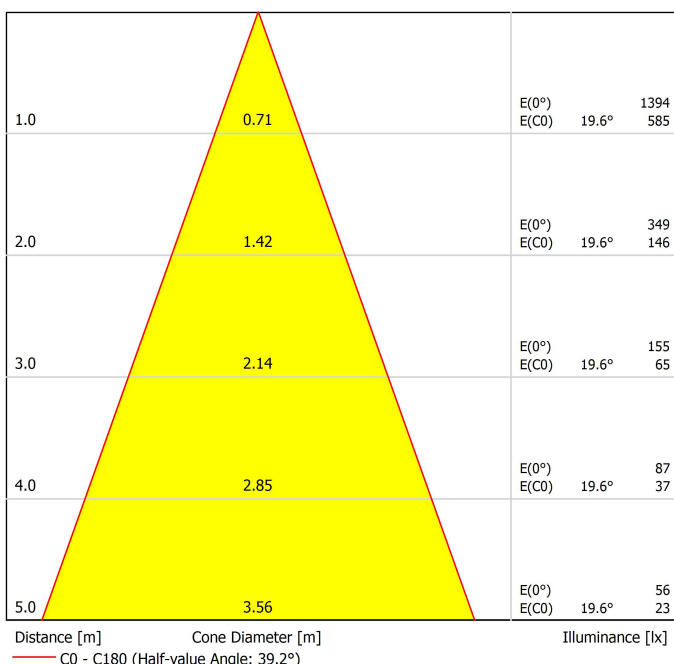

## UGR

### Glare Evaluation According to UGR

| Room Size                                                        | X   | Y           | Viewing direction at right angles to lamp axis |      |      |      |      |             | Viewing direction parallel to lamp axis |      |      |      |      |      |      |      |
|------------------------------------------------------------------|-----|-------------|------------------------------------------------|------|------|------|------|-------------|-----------------------------------------|------|------|------|------|------|------|------|
| 2H                                                               | 2H  | 14.7        | 15.5                                           | 15.0 | 15.7 | 15.9 | 14.7 | 15.5        | 15.0                                    | 15.7 | 15.9 | 14.7 | 15.5 | 15.0 | 15.7 | 15.9 |
| 3H                                                               | 3H  | 16.6        | 17.3                                           | 16.9 | 17.5 | 17.8 | 16.6 | 17.3        | 16.9                                    | 17.5 | 17.8 | 16.6 | 17.3 | 16.9 | 17.5 | 17.8 |
| 4H                                                               | 4H  | 17.4        | 18.1                                           | 17.7 | 18.3 | 18.6 | 17.4 | 18.1        | 17.7                                    | 18.3 | 18.6 | 17.4 | 18.1 | 17.7 | 18.3 | 18.6 |
| 6H                                                               | 6H  | 18.1        | 18.8                                           | 18.5 | 19.1 | 19.3 | 18.1 | 18.8        | 18.5                                    | 19.1 | 19.3 | 18.1 | 18.8 | 18.5 | 19.1 | 19.3 |
| 8H                                                               | 8H  | 18.5        | 19.1                                           | 18.8 | 19.4 | 19.7 | 18.5 | 19.1        | 18.8                                    | 19.4 | 19.7 | 18.5 | 19.1 | 18.8 | 19.4 | 19.7 |
| 12H                                                              | 12H | 18.8        | 19.4                                           | 19.2 | 19.7 | 20.0 | 18.8 | 19.4        | 19.2                                    | 19.7 | 20.0 | 18.8 | 19.4 | 19.2 | 19.7 | 20.0 |
| 4H                                                               | 2H  | 15.4        | 16.0                                           | 15.7 | 16.3 | 16.5 | 15.4 | 16.0        | 15.7                                    | 16.3 | 16.5 | 15.4 | 16.0 | 15.7 | 16.3 | 16.5 |
| 3H                                                               | 3H  | 17.4        | 18.0                                           | 17.8 | 18.3 | 18.6 | 17.4 | 18.0        | 17.8                                    | 18.3 | 18.6 | 17.4 | 18.0 | 17.8 | 18.3 | 18.6 |
| 4H                                                               | 4H  | 18.4        | 18.9                                           | 18.8 | 19.2 | 19.6 | 18.4 | 18.9        | 18.8                                    | 19.2 | 19.6 | 18.4 | 18.9 | 18.8 | 19.2 | 19.6 |
| 6H                                                               | 6H  | 19.3        | 19.7                                           | 19.7 | 20.1 | 20.5 | 19.3 | 19.7        | 19.7                                    | 20.1 | 20.5 | 19.3 | 19.7 | 19.7 | 20.1 | 20.5 |
| 8H                                                               | 8H  | 19.8        | 20.1                                           | 20.2 | 20.5 | 20.9 | 19.8 | 20.1        | 20.2                                    | 20.5 | 20.9 | 19.8 | 20.1 | 20.2 | 20.5 | 20.9 |
| 12H                                                              | 12H | 20.2        | 20.5                                           | 20.6 | 20.9 | 21.3 | 20.2 | 20.5        | 20.6                                    | 20.9 | 21.3 | 20.2 | 20.5 | 20.6 | 20.9 | 21.3 |
| 8H                                                               | 4H  | 18.8        | 19.2                                           | 19.2 | 19.6 | 20.0 | 18.8 | 19.2        | 19.2                                    | 19.6 | 20.0 | 18.8 | 19.2 | 19.2 | 19.6 | 20.0 |
| 6H                                                               | 6H  | 19.9        | 20.2                                           | 20.4 | 20.6 | 21.1 | 19.9 | 20.2        | 20.4                                    | 20.6 | 21.1 | 19.9 | 20.2 | 20.4 | 20.6 | 21.1 |
| 8H                                                               | 8H  | 20.5        | 20.7                                           | 20.9 | 21.2 | 21.6 | 20.5 | 20.7        | 20.9                                    | 21.2 | 21.6 | 20.5 | 20.7 | 20.9 | 21.2 | 21.6 |
| 12H                                                              | 12H | 21.0        | 21.2                                           | 21.5 | 21.7 | 22.2 | 21.0 | 21.2        | 21.5                                    | 21.7 | 22.2 | 21.0 | 21.2 | 21.5 | 21.7 | 22.2 |
| 4H                                                               | 4H  | 18.9        | 19.2                                           | 19.3 | 19.6 | 20.0 | 18.9 | 19.2        | 19.3                                    | 19.6 | 20.0 | 18.9 | 19.2 | 19.3 | 19.6 | 20.0 |
| 6H                                                               | 6H  | 20.0        | 20.3                                           | 20.5 | 20.7 | 21.2 | 20.0 | 20.3        | 20.5                                    | 20.7 | 21.2 | 20.0 | 20.3 | 20.5 | 20.7 | 21.2 |
| 8H                                                               | 8H  | 20.7        | 20.9                                           | 21.1 | 21.3 | 21.8 | 20.7 | 20.9        | 21.1                                    | 21.3 | 21.8 | 20.7 | 20.9 | 21.1 | 21.3 | 21.8 |
| Variation of the observer position for the luminaire distances S |     |             |                                                |      |      |      |      |             |                                         |      |      |      |      |      |      |      |
| S = 1.0H                                                         |     | +0.5 / -0.2 |                                                |      |      |      |      | +0.5 / -0.2 |                                         |      |      |      |      |      |      |      |
| S = 1.5H                                                         |     | +1.1 / -0.4 |                                                |      |      |      |      | +1.1 / -0.4 |                                         |      |      |      |      |      |      |      |
| S = 2.0H                                                         |     | +1.8 / -0.7 |                                                |      |      |      |      | +1.8 / -0.7 |                                         |      |      |      |      |      |      |      |
| Standard table                                                   |     | BK07        |                                                |      |      |      |      | BK07        |                                         |      |      |      |      |      |      |      |
| Correction Summand                                               |     | 2.9         |                                                |      |      |      |      | 2.9         |                                         |      |      |      |      |      |      |      |
| Corrected Glare Indices referring to 940lm Total Luminous Flux   |     |             |                                                |      |      |      |      |             |                                         |      |      |      |      |      |      |      |



| PRODUCT                                                                                      |                  |
|----------------------------------------------------------------------------------------------|------------------|
| Model                                                                                        | IP65 Accessory L |
| Reference                                                                                    | A2123065   W   N |
| Category                                                                                     | Accessories      |
| PRE-ASSEMBLED. NOT SOLD SEPARATELY.<br>AFFECTS THE LIGHTING PARAMETERS.                      |                  |
| <br>44° |                  |

Swap IP65 accessory

To make the difference, Swap IP65 reaches a high sealing level, maintaining at the same time the same aesthetics as a standard Swap. The insulating property is obtained thanks to a protection placed just over the LED, and a silicone joint on the internal part of the bezel. In this way, the external aspect of Swap IP65 is identical to any other Swap IP20.




|          |  |                                         |
|----------|--|-----------------------------------------|
|          |  | PRODUCT                                 |
| Model    |  | Swap L Add-On Bezel                     |
| Colour   |  | W <input type="checkbox"/>   Matt white |
| Category |  | Accessories                             |



85-89

+



89-101

Add-on bezel

Accessory always included but for optional use.

It extends the piece's bezel to cover larger recesses, keeping Swap's minimalism and its perfect integration into the ceiling.

Easy to fit. Ideal for reforms to replace the light spot, with the already existing holes, without altering the ceiling or repainting. Swap is the best option for updating to LED technology by means of a real light fixture with incorporated LED, in contrast to just a retrofit lamp that only implies a less efficient update of the light source.



|           | PRODUCT            |
|-----------|--------------------|
| Model     | Swap L Flat Spring |
| Reference | A2120000           |
| Category  | Accessories        |

**Flat spring accessory**

The springs “Flat Spring” is an accessory that replaces the fixing clamp system for recessed installations in cement ceilings. With Swap XL, L and M versions, the customer will receive a mounting kit wich will allow him to change the fixing clamps for the new system.



Fuente de luz (LED) reemplazable por un profesional autorizado

Replaceable (LED only) light source by an authorized professional.

Source lumineuse (LED) remplaçable par un professionnel agréé

Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato

Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado

Replaceable control gear by an authorized professional

Dispositif de commande remplaçable par un professionnel agréé

Alimentatore sostituibile da parte di un professionista autorizzato

Auswechselbares Betriebsgerät durch autorisierten Fachmann

## Instrucciones para el final de vida y la eliminación de los componentes:

### Instructions on end-of-life and component disposal:


### Instructions pour la gestion des composants en fin de vie et leur mise au rebut :

### Istruzioni per il fine vita e lo smaltimento dei componenti:


### Anweisungen zur entsorgung der Leuchtenkomponenten:



Interrumpir la alimentación del aparato  
Cut the power supply to the luminaire  
Couper l'alimentation du luminaire  
Interrompere l'alimentazione dell'apparecchio  
Stromversorgung der Leuchte unterbrechen



Quitar la(s) fuente(s) de luz para el desecho  
Remove light source(s) for disposal  
Retirer la (les) source(s) lumineuse(s) pour l'élimination  
Rimuovere la/le sorgente/e di luce per lo smaltimento  
Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho  
Remove the battery for decommissioning  
Retirer la batterie pour sa mise au rebut  
Rimuovere la batteria per la dismissione  
Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho  
Remove control gear for disposal  
Retirer le dispositif de commande pour l'élimination  
Rimuovere l'alimentatore per lo smaltimento  
Betriebsgerät zur Entsorgung ausbauen

Enviar los materiales a un centro de recogida RAEE  
Send the materials to a WEEE collection centre  
Envoyer les matériaux dans une déchetterie DEEE  
Inviare i materiali ad un centro di raccolta RAEE  
Die Materialien in einem WEEE-Zentrum entsorgen

