




## Dimensions



## Accessories



IP65 ACCESSORY



ADD-ON BEZEL



FLAT SPRING ACCESSORY

## Awards



reddot design award  
winner 2015



|           |                                                |
|-----------|------------------------------------------------|
| Name      | SWAP XL 7W DIM PH.CUT 2700K WN                 |
| Reference | A2124220WN                                     |
| Color     | White-Black                                    |
| RAL       | Colour in the mass looks alike RAL 9010 & 9005 |
| Category  | CEILING RECESSED                               |

## PRODUCT

|                         |                 |
|-------------------------|-----------------|
| Type                    | LED             |
| Gross luminous flux     | 910 lm          |
| Colour temperature      | 2700 K          |
| Chromatic stability     | MacAdam Step 2  |
| Colour Rendering Index  | CRI>90          |
| Power                   | 7 W             |
| Current                 | 200 mA          |
| Efficacy                | 130 lm/W        |
| LED lifespan            | L90B10 >55.000h |
| Energy efficiency class | E               |

## LIGHT SOURCE

|                     |     |
|---------------------|-----|
| Lighting efficiency | 64% |
| Light beam angle    | 43° |

## LIGHTING FIXTURE | PHOTOMETRIC DATA

|                             |                                       |
|-----------------------------|---------------------------------------|
| Driver                      | Included - Fast Connect               |
| Power values of the system  | 8,39 W                                |
| Frequency                   | 50/60 Hz                              |
| Dimming                     | Phase Cut - Other DIM, please consult |
| Electrical insulation class | □                                     |

## LIGHTING FIXTURE | ELECTRICAL DATA


|                        |                           |
|------------------------|---------------------------|
| Sealing                | IP20                      |
| Wireless control       | Please Consult            |
| Emergency power supply | Please Consult            |
| Impact resistance      | IK07                      |
| Recess measurements    | Ø101 mm                   |
| Weight                 | 260 g                     |
| Packaged weight        | 321 g                     |
| Packaging dimensions   | 113 x 128 x 126 mm        |
| Units per package      | 1                         |
| Materials              | Aluminium / Polycarbonate |

## OTHER DATA



Swap is a ceiling recessed LED spotlight whose main features are its minimalist aspect, its perfect integration into the ceiling, and considerable visual comfort, thanks to the small reflector that is set back with respect to the ceiling plane. When it is switched on, its matte finish shade generates an attractive effect, a discrete circle of light. It includes an add-on bezel that can be used optionally to cover larger recess diameters.


## Polar diagram

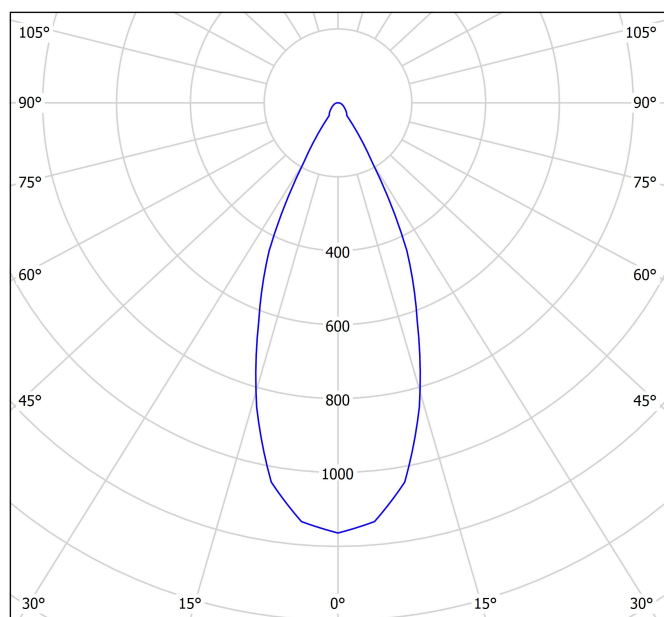

cd/klm  
— C0 - C180 — C90 - C270

$\eta = 64\%$

## Conical diagram

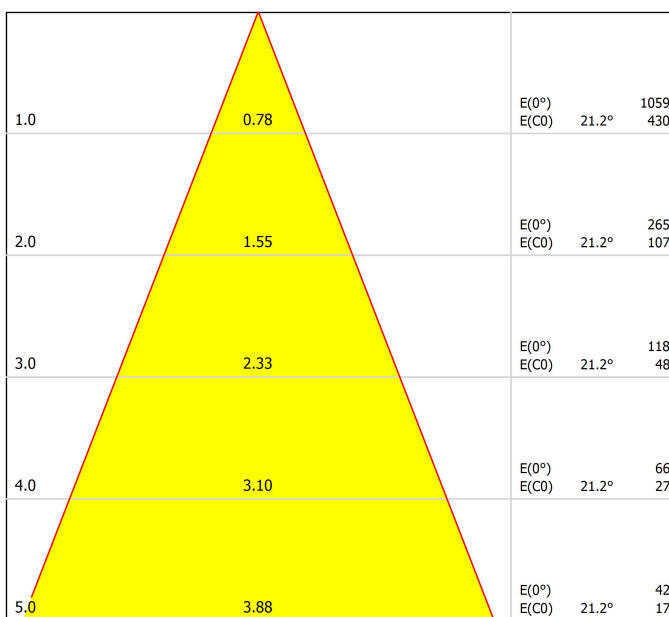


Distance [m] Cone Diameter [m] Illuminance [lx]  
— C0 - C180 (Half-value Angle: 42.4°)

## UGR

### Glare Evaluation According to UGR

| p Ceiling                                                        |     | 70                                                | 70   | 50   | 50   | 30   | 70   | 70                                         | 50   | 50   | 30   |  |  |
|------------------------------------------------------------------|-----|---------------------------------------------------|------|------|------|------|------|--------------------------------------------|------|------|------|--|--|
| p Walls                                                          |     | 50                                                | 30   | 50   | 30   | 30   | 50   | 30                                         | 50   | 30   | 30   |  |  |
| p Floor                                                          |     | 20                                                | 20   | 20   | 20   | 20   | 20   | 20                                         | 20   | 20   | 20   |  |  |
| Room Size<br>X<br>Y                                              |     | Viewing direction at right angles<br>to lamp axis |      |      |      |      |      | Viewing direction parallel<br>to lamp axis |      |      |      |  |  |
| 2H                                                               | 2H  | 11.5                                              | 12.3 | 11.7 | 12.5 | 12.7 | 11.5 | 12.3                                       | 11.7 | 12.5 | 12.7 |  |  |
|                                                                  | 3H  | 13.3                                              | 14.0 | 13.6 | 14.3 | 14.5 | 13.3 | 14.0                                       | 13.6 | 14.3 | 14.5 |  |  |
|                                                                  | 4H  | 14.2                                              | 14.8 | 14.5 | 15.1 | 15.3 | 14.2 | 14.8                                       | 14.5 | 15.1 | 15.3 |  |  |
|                                                                  | 6H  | 14.9                                              | 15.5 | 15.3 | 15.8 | 16.1 | 14.9 | 15.5                                       | 15.3 | 15.8 | 16.1 |  |  |
|                                                                  | 8H  | 15.3                                              | 15.9 | 15.6 | 16.2 | 16.5 | 15.3 | 15.9                                       | 15.6 | 16.2 | 16.5 |  |  |
| 4H                                                               | 12H | 15.7                                              | 16.2 | 16.0 | 16.5 | 16.8 | 15.7 | 16.2                                       | 16.0 | 16.5 | 16.8 |  |  |
|                                                                  | 2H  | 12.1                                              | 12.7 | 12.4 | 13.0 | 13.3 | 12.1 | 12.7                                       | 12.4 | 13.0 | 13.3 |  |  |
|                                                                  | 3H  | 14.2                                              | 14.7 | 14.5 | 15.0 | 15.4 | 14.2 | 14.7                                       | 14.5 | 15.0 | 15.4 |  |  |
|                                                                  | 4H  | 15.2                                              | 15.7 | 15.6 | 16.0 | 16.3 | 15.2 | 15.7                                       | 15.6 | 16.0 | 16.3 |  |  |
|                                                                  | 6H  | 16.1                                              | 16.5 | 16.5 | 16.9 | 17.3 | 16.1 | 16.5                                       | 16.5 | 16.9 | 17.3 |  |  |
| 8H                                                               | 8H  | 16.6                                              | 16.9 | 17.0 | 17.3 | 17.7 | 16.6 | 16.9                                       | 17.0 | 17.3 | 17.7 |  |  |
|                                                                  | 12H | 17.0                                              | 17.4 | 17.5 | 17.8 | 18.2 | 17.0 | 17.4                                       | 17.5 | 17.8 | 18.2 |  |  |
|                                                                  | 4H  | 15.6                                              | 15.9 | 16.0 | 16.3 | 16.7 | 15.6 | 15.9                                       | 16.0 | 16.3 | 16.7 |  |  |
|                                                                  | 6H  | 16.7                                              | 17.0 | 17.2 | 17.4 | 17.9 | 16.7 | 17.0                                       | 17.2 | 17.4 | 17.9 |  |  |
|                                                                  | 8H  | 17.3                                              | 17.5 | 17.8 | 18.0 | 18.5 | 17.3 | 17.5                                       | 17.8 | 18.0 | 18.5 |  |  |
| 12H                                                              | 12H | 17.9                                              | 18.1 | 18.4 | 18.6 | 19.1 | 17.9 | 18.1                                       | 18.4 | 18.6 | 19.1 |  |  |
|                                                                  | 4H  | 15.6                                              | 15.9 | 16.1 | 16.3 | 16.8 | 15.6 | 15.9                                       | 16.1 | 16.3 | 16.8 |  |  |
|                                                                  | 6H  | 16.8                                              | 17.1 | 17.3 | 17.5 | 18.0 | 16.8 | 17.1                                       | 17.3 | 17.5 | 18.0 |  |  |
|                                                                  | 8H  | 17.5                                              | 17.7 | 18.0 | 18.2 | 18.7 | 17.5 | 17.7                                       | 18.0 | 18.2 | 18.7 |  |  |
| Variation of the observer position for the luminaire distances S |     |                                                   |      |      |      |      |      |                                            |      |      |      |  |  |
| S = 1.0H<br>S = 1.5H<br>S = 2.0H                                 |     | +0.6 / -0.2<br>+1.3 / -0.4<br>+2.1 / -0.7         |      |      |      |      |      | +0.6 / -0.2<br>+1.3 / -0.4<br>+2.1 / -0.7  |      |      |      |  |  |
| Standard table<br>Correction<br>Summand                          |     | BK07<br>-0.8                                      |      |      |      |      |      | BK07<br>-0.8                               |      |      |      |  |  |
| Corrected Glare Indices referring to 910lm Total Luminous Flux   |     |                                                   |      |      |      |      |      |                                            |      |      |      |  |  |



**DRIVER**


|            |                                  |
|------------|----------------------------------|
| 0433-01-28 | DRIVER LED 7.5W 200mA DIM PH.CUT |
|------------|----------------------------------|

**PHASE CUT DIMMERS TESTED FOR COMPATIBILITY:**

| Brand / Manufacturer | Model number                        | Dimming Type           |
|----------------------|-------------------------------------|------------------------|
| Busch                | 2247U                               | Leading edge           |
| Busch                | 6523 U                              | Leading edge           |
| Legrand              | Cat 400T                            | Trailing edge          |
| Legrand              | 6708300%                            | Trailing edge          |
| Legrand              | 77006200%                           | Trailing edge          |
| NIKO                 | 310-01900                           | Trailing edge          |
| NIKO                 | 310-02700                           | Trailing edge          |
| NIKO                 | 310-02800                           | Trailing edge          |
| OSRAM                | MCU Te250                           | Trailing edge          |
| Siemens              | 5TC8 284                            | Trailing edge          |
| Diginet              | MEDM/LED Smart phase<br>(DGLCDM400) | Trailing edge          |
| Clipsal              | 32ELED                              | Trailing edge          |
| Hager B&R            | WBMD400LED                          | Trailing edge          |
| V-PRO                | 250W MAX. GLS                       | Trailing edge          |
| SG                   | LEDDIM 400                          | Trailing edge          |
| ELKO                 | 316 GLED                            | Leading edge           |
| Hamilton             | LEDIT-B100                          | Trailing edge          |
| VLTIMATE             | GU6012L                             | Trailing edge          |
| SHUTTLE              | SDIM-T-LED500W                      | Leading edge           |
| RADIANT              | LEDDIMO4-500W                       | Trailing edge          |
| GIRA                 | 238500%                             | Trailing /Leading edge |
| JUNG                 | 122400%                             | Trailing /Leading edge |

THE PARTICULAR CONDITIONS OF EACH INSTALLATION AND THE SPECIFICATIONS AND CONDITIONS OF USE OF EACH REGULATOR, MAY DIFFER FROM THOSE CONSIDERED IN THE COMPATIBILITY TESTING, AND AFFECT ITS PERFORMANCE IN SAID INSTALLATION.

FOR MORE INFO, PLEASE CONSULT



| PRODUCT                                                                 |                   |
|-------------------------------------------------------------------------|-------------------|
| Model                                                                   | IP65 Accessory XL |
| Reference                                                               | A2124065   W   N  |
| Category                                                                | Accessories       |
| PRE-ASSEMBLED. NOT SOLD SEPARATELY.<br>AFFECTS THE LIGHTING PARAMETERS. |                   |



Swap IP65 accessory

To make the difference, Swap IP65 reaches a high sealing level, maintaining at the same time the same aesthetics as a standard Swap. The insulating property is obtained thanks to a protection placed just over the LED, and a silicone joint on the internal part of the bezel. In this way, the external aspect of Swap IP65 is identical to any other Swap IP20.



|          |  |                      |  |
|----------|--|----------------------|--|
|          |  | PRODUCT              |  |
| Model    |  | Swap XL Add-On Bezel |  |
| Colour   |  | W□   Matt white      |  |
| Category |  | Accessories          |  |



Add-on bezel


Accessory always included but for optional use.

It extends the piece's bezel to cover larger recesses, keeping Swap's minimalism and its perfect integration into the ceiling.


Easy to fit. Ideal for reforms to replace the light spot, with the already existing holes, without altering the ceiling or repainting. Swap is the best option for updating to LED technology by means of a real light fixture with incorporated LED, in contrast to just a retrofit lamp that only implies a less efficient update of the light source.



| PRODUCT   |                     |
|-----------|---------------------|
| Model     | Swap XL Flat Spring |
| Reference | A2120000            |
| Category  | Accessories         |



101



With extra bezel

105-117

Flat spring accessory

The springs “Flat Spring” is an accessory that replaces the fixing clamp system for recessed installations in cement ceilings. With Swap XL, L and M versions, the customer will receive a mounting kit wich will allow him to change the fixing clamps for the new system.



Fuente de luz (LED) reemplazable por un profesional autorizado

Replaceable (LED only) light source by an authorized professional.

Source lumineuse (LED) remplaçable par un professionnel agréé

Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato

Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado

Replaceable control gear by an authorized professional

Dispositif de commande remplaçable par un professionnel agréé

Alimentatore sostituibile da parte di un professionista autorizzato

Auswechselbares Betriebsgerät durch autorisierten Fachmann

## Instrucciones para el final de vida y la eliminación de los componentes:

### Instructions on end-of-life and component disposal:


### Instructions pour la gestion des composants en fin de vie et leur mise au rebut :

### Istruzioni per il fine vita e lo smaltimento dei componenti:


### Anweisungen zur entsorgung der Leuchtenkomponenten:



Interrumpir la alimentación del aparato  
Cut the power supply to the luminaire  
Couper l'alimentation du luminaire  
Interrompere l'alimentazione dell'apparecchio  
Stromversorgung der Leuchte unterbrechen



Quitar la(s) fuente(s) de luz para el desecho  
Remove light source(s) for disposal  
Retirer la (les) source(s) lumineuse(s) pour l'élimination  
Rimuovere la/le sorgente/e di luce per lo smaltimento  
Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho  
Remove the battery for decommissioning  
Retirer la batterie pour sa mise au rebut  
Rimuovere la batteria per la dismissione  
Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho  
Remove control gear for disposal  
Retirer le dispositif de commande pour l'élimination  
Rimuovere l'alimentatore per lo smaltimento  
Betriebsgerät zur Entsorgung ausbauen

Enviar los materiales a un centro de recogida RAEE  
Send the materials to a WEEE collection centre  
Envoyer les matériaux dans une déchetterie DEEE  
Inviare i materiali ad un centro di raccolta RAEE  
Die Materialien in einem WEEE-Zentrum entsorgen

