



### DIMENSIONS



Name	FOX MINI 3 4000K W
Reference	A2180312W
Color	Matt white
RAL	Colour in the mass looks alike RAL 9016
Category	CEILING RECESSED

Type	LED
Gross luminous flux	1325 lm
Colour temperature	4000 K
Chromatic stability	MacAdam Step 2
Colour Rendering Index	CRI>90
Power	10 W
Current	700 mA
Efficacy	133 lm/W
LED lifespan	L80B10 >60.000h

### LIGHT SOURCE

Type	LED
Gross luminous flux	1325 lm
Colour temperature	4000 K
Chromatic stability	MacAdam Step 2
Colour Rendering Index	CRI>90
Power	10 W
Current	700 mA
Efficacy	133 lm/W
LED lifespan	L80B10 >60.000h

### LIGHTING FIXTURE | PHOTOMETRIC DATA

Lighting efficiency	66%
Light beam angle	111°

### LIGHTING FIXTURE | ELECTRICAL DATA

Driver	Included - Connected
Power values of the system	12,33 W
Frequency	50/60 Hz
Dimming	No Dim
Electrical insulation class	□

Sealing	IP54
Wireless control	Please Consult
Emergency power supply	Please Consult
Impact resistance	IK10
Recess measurements	Ø122 mm
Weight	290 g
Packaged weight	390,2 g
Packaging dimensions	366 x 189 x 468 mm
Units per package	1
Materials	Polycarbonate / Polycarbonate-Matt


### OTHER DATA

Sealing	IP54
Wireless control	Please Consult
Emergency power supply	Please Consult
Impact resistance	IK10
Recess measurements	Ø122 mm
Weight	290 g
Packaged weight	390,2 g
Packaging dimensions	366 x 189 x 468 mm
Units per package	1
Materials	Polycarbonate / Polycarbonate-Matt




Fox is the round recessed ceiling downlight with an extra-flat bezel. The discretion of its frame almost makes it appear trimless when switched on. Great water-tightness, resistant to impacts and corrosion. Suitable to be installed in places near the sea.

POLAR DIAGRAM

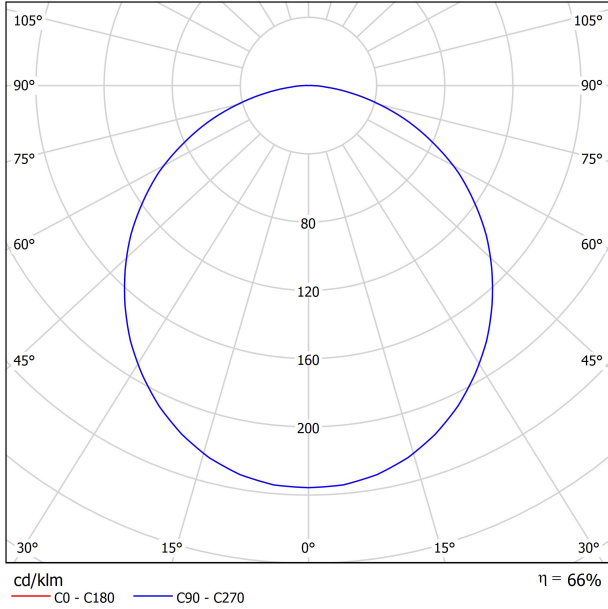

CONICAL DIAGRAM

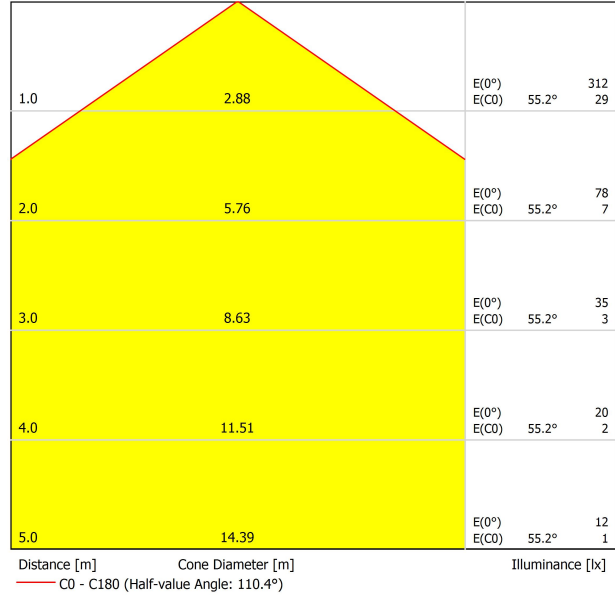

UGR

Glare Evaluation According to UGR											
ρ Ceiling	70	70	50	50	30	70	70	50	50	30	30
ρ Walls	50	30	50	30	30	50	30	50	30	30	30
ρ Floor	20	20	20	20	20	20	20	20	20	20	20
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	23.3	24.7	23.6	24.9	25.1	23.3	24.7	23.6	24.9	25.1
	3H	25.0	26.2	25.4	26.5	26.8	25.0	26.2	25.4	26.5	26.8
	4H	25.6	26.8	26.0	27.1	27.3	25.6	26.8	26.0	27.1	27.3
	6H	26.0	27.1	26.4	27.4	27.7	26.0	27.1	26.4	27.4	27.7
	8H	26.1	27.2	26.5	27.5	27.8	26.1	27.2	26.5	27.5	27.8
4H	12H	26.2	27.2	26.6	27.5	27.8	26.2	27.2	26.6	27.5	27.8
	2H	23.9	25.0	24.2	25.3	25.6	23.9	25.0	24.2	25.3	25.6
	3H	25.8	26.8	26.2	27.1	27.4	25.8	26.8	26.2	27.1	27.4
	4H	26.5	27.4	26.9	27.8	28.1	26.5	27.4	26.9	27.8	28.1
	6H	27.1	27.8	27.5	28.2	28.6	27.1	27.8	27.5	28.2	28.6
8H	8H	27.2	27.9	27.7	28.3	28.7	27.2	27.9	27.7	28.3	28.7
	12H	27.3	27.9	27.8	28.3	28.8	27.3	27.9	27.8	28.3	28.8
	4H	26.8	27.5	27.2	27.9	28.3	26.8	27.5	27.2	27.9	28.3
12H	6H	27.4	28.0	27.9	28.4	28.9	27.4	28.0	27.9	28.4	28.9
	8H	27.7	28.2	28.2	28.6	29.1	27.7	28.2	28.2	28.6	29.1
	12H	27.8	28.2	28.3	28.7	29.2	27.8	28.2	28.3	28.7	29.2
12H	4H	26.8	27.5	27.3	27.9	28.3	26.8	27.5	27.3	27.9	28.3
	6H	27.5	28.0	28.0	28.4	28.9	27.5	28.0	28.0	28.4	28.9
	8H	27.7	28.2	28.2	28.6	29.1	27.7	28.2	28.2	28.6	29.1
Variation of the observer position for the luminaire distances S											
S = 1.0H	+0.1 / -0.1					+0.1 / -0.1					
S = 1.5H	+0.2 / -0.4					+0.2 / -0.4					
S = 2.0H	+0.4 / -0.7					+0.4 / -0.7					
Standard table	BK05					BK05					
Correction Summand	7.8					7.8					
Corrected Glare Indices referring to 1325lm Total Luminous Flux											



Fuente de luz (LED) reemplazable por un profesional autorizado

Replaceable (LED only) light source by an authorized professional.

Source lumineuse (LED) remplaçable par un professionnel agréé

Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato

Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado

Replaceable control gear by an authorized professional

Dispositif de commande remplaçable par un professionnel agréé

Alimentatore sostituibile da parte di un professionista autorizzato

Auswechselbares Betriebsgerät durch autorisierten Fachmann

INSTRUCCIONES PARA EL FINAL DE VIDA Y LA ELIMINACIÓN LOS COMPONENTES  
 INSTRUCTIONS ON END-OF-LIFE AND COMPONENT DISPOSAL  
 INSTRUCTIONS POUR LA GESTION DES COMPOSANTS EN FIN DE VIE ET LEUR MISE AU REBUT  
 ISTRUZIONI PER IL FINE VITA E LO SMALTIMENTO DEI COMPONENTI  
 ANWEISUNGEN ZUR ENTSORGUNG DER LEUCHTENKOMPONENTEN



Interrumpir la alimentación del aparato  
 Cut the power supply to the luminaire  
 Couper l'alimentation du luminaire  
 Interrompere l'alimentazione dell'apparecchio  
 Stromversorgung der Leuchte unterbrechen



Quitar la(s) fuente(s) de luz para el desecho  
 Remove light source(s) for disposal  
 Retirer la (les) source(s) lumineuse(s) pour l'élimination  
 Rimuovere la/le sorgente/e di luce per lo smaltimento  
 Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho  
 Remove the battery for decommissioning  
 Retirer la batterie pour sa mise au rebut  
 Rimuovere la batteria per la dismissione  
 Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho  
 Remove control gear for disposal  
 Retirer le dispositif de commande pour l'élimination  
 Rimuovere l'alimentatore per lo smaltimento  
 Betriebsgerät zur Entsorgung ausbauen



Enviar los materiales a un centro de recogida RAEE  
 Send the materials to a WEEE collection centre  
 Envoyer les matériaux dans une déchetterie DEEE  
 Inviare i materiali ad un centro di raccolta RAEE  
 Die Materialien in einem WEEE-Zentrum entsorgen

