




Dimensions



Awards



PRODUCT

Name	STRAM MINI 2 3000K WT
Reference	A2360211WT
Colour	Textured white
RAL	9016
Category	CEILING RECESSED

LIGHT SOURCE

Type	LED
Gross luminous flux	1050 lm
Colour temperature	3000 K
Chromatic stability	MacAdam Step 2
Colour Rendering Index	CRI>90
Power	7 W
Current	500 mA
Efficacy	150 lm/W
LED lifespan	L80B10 >60.000h
Energy efficiency class	D

LIGHTING FIXTURE | PHOTOMETRIC DATA

Lighting efficiency	80%
Light beam angle	100°

LIGHTING FIXTURE | ELECTRICAL DATA

Driver	Included - Connected
Power values of the system	8,88 W
Frequency	50/60 Hz
Dimming	No Dim
Electrical insulation class	□


OTHER DATA

Sealing	IP43
Wireless control	Please Consult
Emergency power supply	Please Consult
Impact resistance	IK07
Recess measurements	Ø122 mm
Weight	650 g
Packaged weight	795,1 g
Packaging dimensions	203 x 249 x 72 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate



Ceiling recessed downlight, with a prominent bezel and textured finish, for general lighting functions with diffuse light. Its differentiated aesthetics provide distinction in spaces where it is fitted, considerably different to the traditional round downlight.


Polar diagram

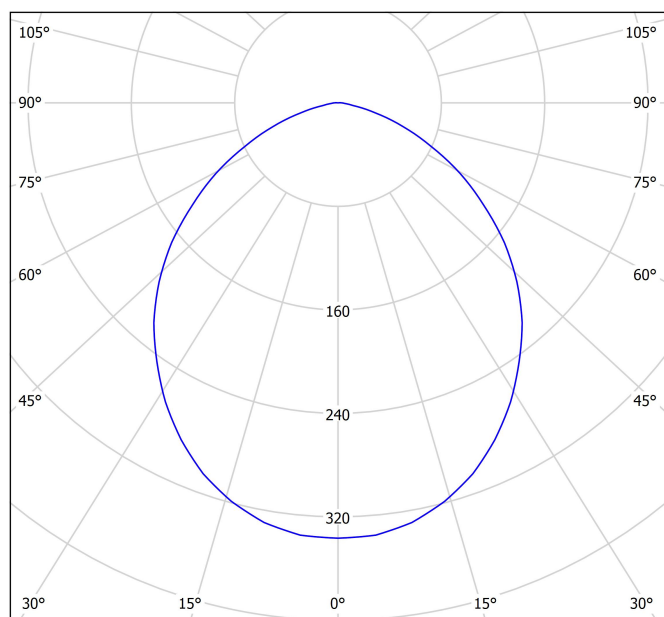

cd/klm
— C0 - C180 — C90 - C270

η = 80%

Conical diagram

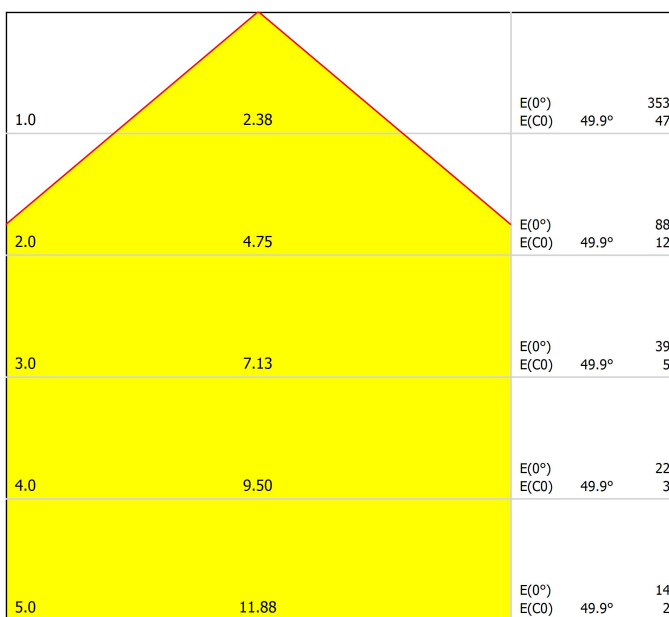


Distance [m] Cone Diameter [m]
— C0 - C180 (Half-value Angle: 99.8°)

Illuminance [lx]

UGR

Glare Evaluation According to UGR

p Ceiling		70	70	50	50	30	70	70	50	50	30		
p Walls		50	30	50	30	30	50	30	50	30	30		
p Floor		20	20	20	20	20	20	20	20	20	20		
Room Size X Y		Viewing direction at right angles to lamp axis						Viewing direction parallel to lamp axis					
2H	2H	24.4	25.6	24.7	25.8	26.1	24.4	25.6	24.7	25.8	26.1		
	3H	25.6	26.7	25.9	26.9	27.2	25.6	26.7	25.9	26.9	27.2		
	4H	25.9	26.9	26.2	27.2	27.5	25.9	26.9	26.2	27.2	27.5		
	6H	26.0	26.9	26.3	27.2	27.5	26.0	26.9	26.3	27.2	27.5		
	8H	26.0	26.9	26.3	27.2	27.5	26.0	26.9	26.3	27.2	27.5		
4H	12H	26.0	26.9	26.4	27.2	27.5	26.0	26.9	26.4	27.2	27.5		
	2H	24.8	25.8	25.1	26.1	26.4	24.8	25.8	25.1	26.1	26.4		
	3H	26.2	27.0	26.5	27.4	27.7	26.2	27.0	26.5	27.4	27.7		
	4H	26.5	27.3	26.9	27.7	28.0	26.5	27.3	26.9	27.7	28.0		
	6H	26.7	27.4	27.1	27.8	28.1	26.7	27.4	27.1	27.8	28.1		
8H	8H	26.7	27.3	27.2	27.7	28.2	26.7	27.3	27.2	27.7	28.2		
	12H	26.8	27.3	27.2	27.7	28.1	26.8	27.3	27.2	27.7	28.1		
	4H	26.7	27.3	27.1	27.7	28.1	26.7	27.3	27.1	27.7	28.1		
	6H	26.9	27.4	27.3	27.8	28.2	26.9	27.4	27.3	27.8	28.2		
	8H	26.9	27.4	27.4	27.8	28.3	26.9	27.4	27.4	27.8	28.3		
12H	12H	27.0	27.3	27.5	27.8	28.3	27.0	27.3	27.5	27.8	28.3		
	4H	26.6	27.2	27.1	27.6	28.0	26.6	27.2	27.1	27.6	28.0		
	6H	26.9	27.3	27.3	27.7	28.2	26.9	27.3	27.3	27.7	28.2		
	8H	26.9	27.3	27.4	27.8	28.3	26.9	27.3	27.4	27.8	28.3		
	Variation of the observer position for the luminaire distances S												
S = 1.0H		+0.2 / -0.3						+0.2 / -0.3					
S = 1.5H		+0.4 / -0.7						+0.4 / -0.7					
S = 2.0H		+0.9 / -1.4						+0.9 / -1.4					
Standard table		BK03						BK03					
Correction Summand		8.5						8.5					
Corrected Glare Indices referring to 1050lm Total Luminous Flux													



Fuente de luz (LED) reemplazable por un profesional autorizado
 Replaceable (LED only) light source by an authorized professional.
 Source lumineuse (LED) remplaçable par un professionnel agréé
 Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato
 Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado
 Replaceable control gear by an authorized professional
 Dispositif de commande remplaçable par un professionnel agréé
 Alimentatore sostituibile da parte di un professionista autorizzato
 Auswechselbares Betriebsgerät durch autorisierten Fachmann

Instrucciones para el final de vida y la eliminación de los componentes:

Instructions on end-of-life and component disposal:


Instructions pour la gestion des composants en fin de vie et leur mise au rebut :

Istruzioni per il fine vita e lo smaltimento dei componenti:


Anweisungen zur entsorgung der Leuchtenkomponenten:



Interrumpir la alimentación del aparato
 Cut the power supply to the luminaire
 Couper l'alimentation du luminaire
 Interrompere l'alimentazione dell'apparecchio
 Stromversorgung der Leuchte unterbrechen



Quitar la(s) fuente(s) de luz para el desecho
 Remove light source(s) for disposal
 Retirer la (les) source(s) lumineuse(s) pour l'élimination
 Rimuovere la/le sorgente/e di luce per lo smaltimento
 Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho
 Remove the battery for decommissioning
 Retirer la batterie pour sa mise au rebut
 Rimuovere la batteria per la dismissione
 Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho
 Remove control gear for disposal
 Retirer le dispositif de commande pour l'élimination
 Rimuovere l'alimentatore per lo smaltimento
 Betriebsgerät zur Entsorgung ausbauen

Enviar los materiales a un centro de recogida RAEE
 Send the materials to a WEEE collection centre
 Envoyer les matériaux dans une déchetterie DEEE
 Inviare i materiali ad un centro di raccolta RAEE
 Die Materialien in einem WEEE-Zentrum entsorgen

