




DIMENSIONS



Name	DEEP 1 DIM PUSH 2700K WT
Reference	A2490120WT
Color	Textured white
RAL	9016
Category	CEILING RECESSED

Type	LED
Gross luminous flux	1525 lm
Colour temperature	2700 K
Chromatic stability	MacAdam Step 2
Colour Rendering Index	CRI > 90
Power	10,5 W
Current	350 mA
Efficacy	145 lm/W
LED lifespan	L80B10 > 60.000h

Lighting efficiency	85%
Light beam angle	94°

Driver	Included - Connected
Power values of the system	12,95 W
Frequency	50/60 Hz
Dimming	Push
Electrical insulation class	□

Sealing	IP43
Wireless control	Please Consult
Emergency power supply	Please Consult
Impact resistance	IK07
Recess measurements	Ø205 mm
Weight	1255 g
Packaged weight	1498 g
Packaging dimensions	305 x 250 x 90 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate


OTHER DATA

Sealing	IP43
Wireless control	Please Consult
Emergency power supply	Please Consult
Impact resistance	IK07
Recess measurements	Ø205 mm
Weight	1255 g
Packaged weight	1498 g
Packaging dimensions	305 x 250 x 90 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate




Deep is a LED downlight for general lighting functions whose main feature is its attractive aspect, with the diffuser considerably set back with respect to the plane of the perimeter frame.

POLAR DIAGRAM

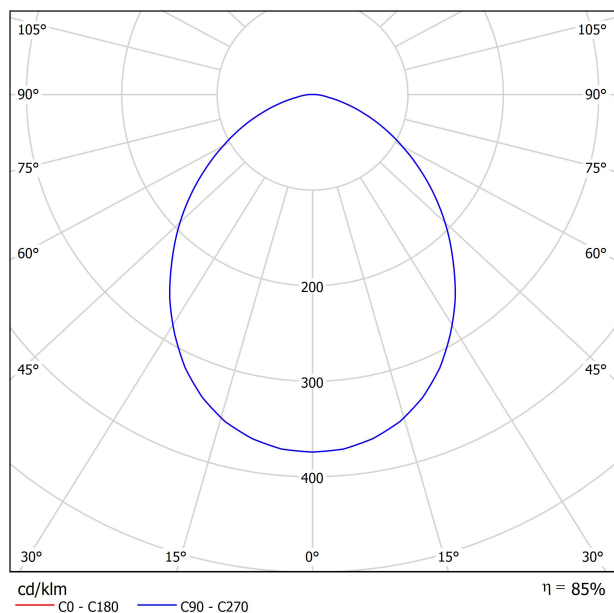

CONICAL DIAGRAM

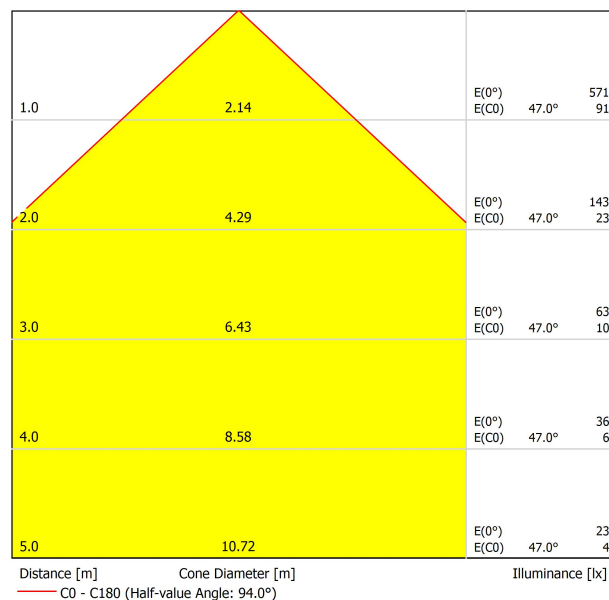

UGR

Glare Evaluation According to UGR												
p Ceiling		70	70	50	50	30	70	70	50	50	30	
p Walls		50	30	50	30	30	50	30	50	30	30	
p Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	20.3	21.5	20.6	21.8	22.0	20.3	21.5	20.6	21.8	22.0	
	3H	21.6	22.7	21.9	23.0	23.2	21.6	22.7	21.9	23.0	23.2	
	4H	22.0	23.0	22.3	23.3	23.6	22.0	23.0	22.3	23.3	23.6	
	6H	22.2	23.2	22.6	23.5	23.8	22.2	23.2	22.6	23.5	23.8	
	8H	22.3	23.2	22.6	23.5	23.8	22.3	23.2	22.6	23.5	23.8	
	12H	22.3	23.2	22.7	23.5	23.9	22.3	23.2	22.7	23.5	23.9	
4H	2H	20.8	21.8	21.1	22.1	22.4	20.8	21.8	21.1	22.1	22.4	
	3H	22.2	23.1	22.6	23.4	23.8	22.2	23.1	22.6	23.4	23.8	
	4H	22.7	23.5	23.1	23.9	24.2	22.7	23.5	23.1	23.9	24.2	
	6H	23.0	23.7	23.5	24.1	24.5	23.0	23.7	23.5	24.1	24.5	
	8H	23.1	23.8	23.6	24.1	24.6	23.1	23.8	23.6	24.1	24.6	
	12H	23.2	23.8	23.7	24.2	24.6	23.2	23.8	23.7	24.2	24.6	
8H	4H	22.9	23.5	23.3	23.9	24.3	22.9	23.5	23.3	23.9	24.3	
	6H	23.3	23.8	23.7	24.2	24.7	23.3	23.8	23.7	24.2	24.7	
	8H	23.4	23.9	23.9	24.3	24.8	23.4	23.9	23.9	24.3	24.8	
	12H	23.6	24.0	24.1	24.4	24.9	23.6	24.0	24.1	24.4	24.9	
12H	4H	22.9	23.5	23.4	23.9	24.3	22.9	23.5	23.4	23.9	24.3	
	6H	23.3	23.7	23.8	24.2	24.7	23.3	23.7	23.8	24.2	24.7	
	8H	23.5	23.9	24.0	24.3	24.8	23.5	23.9	24.0	24.3	24.8	
Variation of the observer position for the luminaire distances S												
S = 1.0H		+0.2 / -0.2					+0.2 / -0.2					
S = 1.5H		+0.3 / -0.6					+0.3 / -0.6					
S = 2.0H		+0.7 / -1.2					+0.7 / -1.2					
Standard table		BK04					BK04					
Correction Summand		4.2					4.2					
Corrected Glare Indices referring to 1525lm Total Luminous Flux												



Fuente de luz (LED) reemplazable por un profesional autorizado

Replaceable (LED only) light source by an authorized professional.

Source lumineuse (LED) remplaçable par un professionnel agréé

Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato

Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado

Replaceable control gear by an authorized professional

Dispositif de commande remplaçable par un professionnel agréé

Alimentatore sostituibile da parte di un professionista autorizzato

Auswechselbares Betriebsgerät durch autorisierten Fachmann

INSTRUCCIONES PARA EL FINAL DE VIDA Y LA ELIMINACIÓN LOS COMPONENTES
INSTRUCTIONS ON END-OF-LIFE AND COMPONENT DISPOSAL
INSTRUCTIONS POUR LA GESTION DES COMPOSANTS EN FIN DE VIE ET LEUR MISE AU REBUT
ISTRUZIONI PER IL FINE VITA E LO SMALTIMENTO DEI COMPONENTI
ANWEISUNGEN ZUR ENTSORGUNG DER LEUCHTENKOMPONENTEN



Interrumpir la alimentación del aparato
Cut the power supply to the luminaire
Couper l'alimentation du luminaire
Interrompere l'alimentazione dell'apparecchio
Stromversorgung der Leuchte unterbrechen



Quitar la(s) fuente(s) de luz para el desecho
Remove light source(s) for disposal
Retirer la (les) source(s) lumineuse(s) pour l'élimination
Rimuovere la/le sorgente/e di luce per lo smaltimento
Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho
Remove the battery for decommissioning
Retirer la batterie pour sa mise au rebut
Rimuovere la batteria per la dismissione
Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho
Remove control gear for disposal
Retirer le dispositif de commande pour l'élimination
Rimuovere l'alimentatore per lo smaltimento
Betriebsgerät zur Entsorgung ausbauen

Enviar los materiales a un centro de recogida RAEE
Send the materials to a WEEE collection centre
Envoyer les matériaux dans une déchetterie DEEE
Inviare i materiali ad un centro di raccolta RAEE
Die Materialien in einem WEEE-Zentrum entsorgen

