




Dimensions



PRODUCT

DEEP MINI 2 DIM PUSH 2700K NT

A2500220NT

Textured black

9005

CEILING RECESSED

LIGHT SOURCE

LED

Gross luminous flux 975 lm

Colour temperature 2700 K

Chromatic stability MacAdam Step 2

Colour Rendering Index CRI>90

Power 7 W

Current 500 mA

Efficacy 139 lm/W

LED lifespan L80B10 >60.000h

Energy efficiency class E

LIGHTING FIXTURE | PHOTOMETRIC DATA

Lighting efficiency 76%

Light beam angle 89°

LIGHTING FIXTURE | ELECTRICAL DATA

Driver Included - Connected

Power values of the system 9,28 W

Frequency 50/60 Hz

Dimming Push

Electrical insulation class 

OTHER DATA

Sealing IP43

Wireless control Please Consult

Emergency power supply Please Consult

Impact resistance IK07

Recess measurements $\varnothing 122$ mm

Weight 650 g

Packaged weight 786,3 g

Packaging dimensions 195 x 160 x 90 mm


Units per package 1

Materials Aluminium / Polymethyl Methacrylate




Deep is a LED downlight for general lighting functions whose main feature is its attractive aspect, with the diffuser considerably set back with respect to the plane of the perimeter frame.

Polar diagram

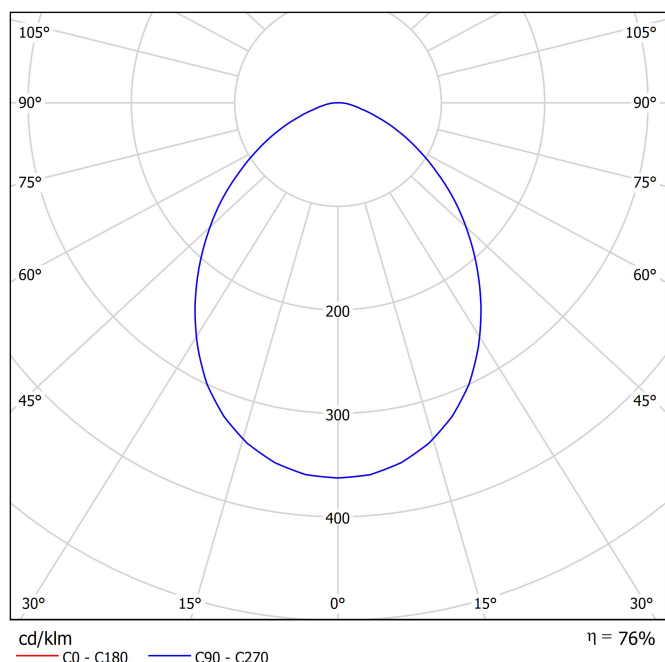

Conical diagram

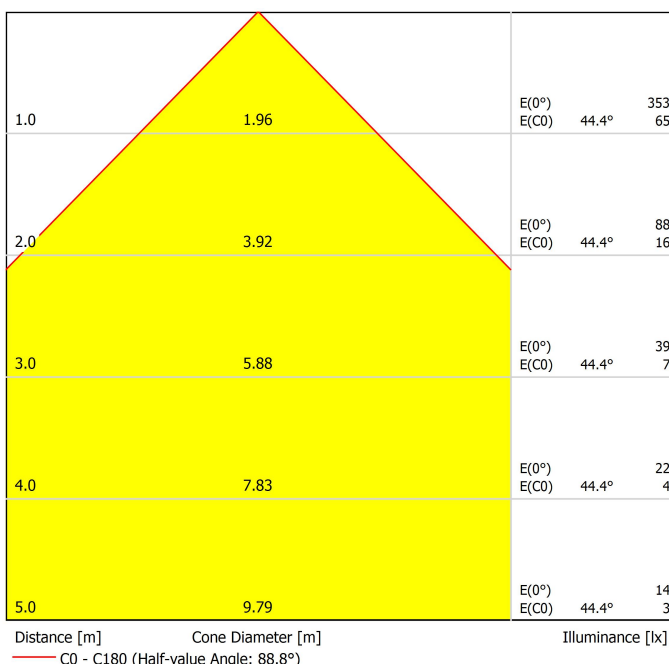

UGR

Glare Evaluation According to UGR

Room Size		Viewing direction at right angles to lamp axis						Viewing direction parallel to lamp axis					
X	Y												
2H	2H	21.4	22.6	21.7	22.8	23.0	21.4	22.6	21.7	22.8	23.0		
3H	3H	22.5	23.5	22.8	23.8	24.0	22.5	23.5	22.8	23.8	24.0		
4H	4H	22.7	23.7	23.1	24.0	24.3	22.7	23.7	23.1	24.0	24.3		
6H	6H	22.9	23.9	23.3	24.2	24.5	22.9	23.9	23.3	24.2	24.5		
8H	8H	23.0	23.9	23.4	24.2	24.5	23.0	23.9	23.4	24.2	24.5		
12H	12H	23.1	23.9	23.5	24.2	24.6	23.1	23.9	23.5	24.2	24.6		
4H	2H	21.8	22.8	22.1	23.1	23.3	21.8	22.8	22.1	23.1	23.3		
3H	3H	23.0	23.8	23.4	24.2	24.5	23.0	23.8	23.4	24.2	24.5		
4H	4H	23.4	24.1	23.8	24.5	24.8	23.4	24.1	23.8	24.5	24.8		
6H	6H	23.7	24.3	24.1	24.7	25.1	23.7	24.3	24.1	24.7	25.1		
8H	8H	23.8	24.4	24.2	24.8	25.2	23.8	24.4	24.2	24.8	25.2		
12H	12H	23.9	24.4	24.4	24.9	25.3	23.9	24.4	24.4	24.9	25.3		
8H	4H	23.5	24.1	23.9	24.5	24.9	23.5	24.1	23.9	24.5	24.9		
6H	6H	23.9	24.4	24.4	24.8	25.3	23.9	24.4	24.4	24.8	25.3		
8H	8H	24.1	24.5	24.6	25.0	25.4	24.1	24.5	24.6	25.0	25.4		
12H	12H	24.3	24.6	24.8	25.1	25.6	24.3	24.6	24.8	25.1	25.6		
12H	4H	23.5	24.0	23.9	24.4	24.9	23.5	24.0	23.9	24.4	24.9		
6H	6H	23.9	24.3	24.4	24.8	25.3	23.9	24.3	24.4	24.8	25.3		
8H	8H	24.2	24.5	24.6	25.0	25.5	24.2	24.5	24.6	25.0	25.5		
Variation of the observer position for the luminaire distances S													
S = 1.0H		+0.2 / -0.3						+0.2 / -0.3					
S = 1.5H		+0.4 / -0.8						+0.4 / -0.8					
S = 2.0H		+1.0 / -1.5						+1.0 / -1.5					
Standard table		BK03						BK03					
Correction Summand		5.8						5.8					
Corrected Glare Indices referring to 975lm Total Luminous Flux													



Fuente de luz (LED) reemplazable por un profesional autorizado

Replaceable (LED only) light source by an authorized professional.

Source lumineuse (LED) remplaçable par un professionnel agréé

Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato

Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado

Replaceable control gear by an authorized professional

Dispositif de commande remplaçable par un professionnel agréé

Alimentatore sostituibile da parte di un professionista autorizzato

Auswechselbares Betriebsgerät durch autorisierten Fachmann

Instrucciones para el final de vida y la eliminación de los componentes:

Instructions on end-of-life and component disposal:

Instructions pour la gestion des composants en fin de vie et leur mise au rebut :

Istruzioni per il fine vita e lo smaltimento dei componenti:

Anweisungen zur entsorgung der Leuchtenkomponenten:



Interrumpir la alimentación del aparato
Cut the power supply to the luminaire
Couper l'alimentation du luminaire
Interrompere l'alimentazione dell'apparecchio
Stromversorgung der Leuchte unterbrechen



Quitar la(s) fuente(s) de luz para el desecho
Remove light source(s) for disposal
Retirer la (les) source(s) lumineuse(s) pour l'élimination
Rimuovere la/le sorgente/e di luce per lo smaltimento
Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho
Remove the battery for decommissioning
Retirer la batterie pour sa mise au rebut
Rimuovere la batteria per la dismissione
Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho
Remove control gear for disposal
Retirer le dispositif de commande pour l'élimination
Rimuovere l'alimentatore per lo smaltimento
Betriebsgerät zur Entsorgung ausbauen

Enviar los materiales a un centro de recogida RAEE
Send the materials to a WEEE collection centre
Envoyer les matériaux dans une déchetterie DEEE
Inviare i materiali ad un centro di raccolta RAEE
Die Materialien in einem WEEE-Zentrum entsorgen

