




#### DIMENSIONS



#### AWARDS



Name	PUCK L 4000K WT
Reference	A2512002WT
Color	Textured white
RAL	9016
Category	SURFACE

Type	LED
Gross luminous flux	1330 lm
Colour temperature	4000 K
Chromatic stability	MacAdam Step 3
Colour Rendering Index	CRI > 90
Power	15 W
Efficacy	88 lm/W
LED lifespan	L70B10 > 50.000h

Lighting efficiency	80%
Light beam angle	37°

Driver	Included
Power values of the system	20,00 W
Frequency	50/60 Hz
Dimming	No Dim
Electrical insulation class	⚡

Sealing	IP20
Weight	510 g
Packaged weight	570 g
Packaging dimensions	134 x 119 x 73,5 mm
Units per package	1
Materials	Aluminium / Optical Glass

#### PRODUCT

#### LIGHT SOURCE

#### LIGHTING FIXTURE | PHOTOMETRIC DATA


#### LIGHTING FIXTURE | ELECTRICAL DATA

#### OTHER DATA




Puck is a luminaire that –for its function, opening angle and luminous flux- manages to embody, in a surface piece, the performance of the classic recessed luminaires with dichroic lamps. Puck is designed to undertake general lighting functions and, moreover, given its ultra-compact format, aims to conserve discretion in those places where it is impossible to recess the appliances in the ceiling.

POLAR DIAGRAM

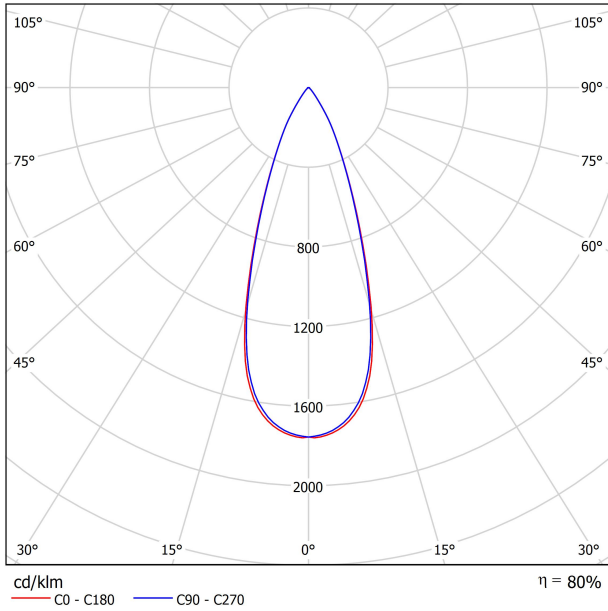

CONICAL DIAGRAM

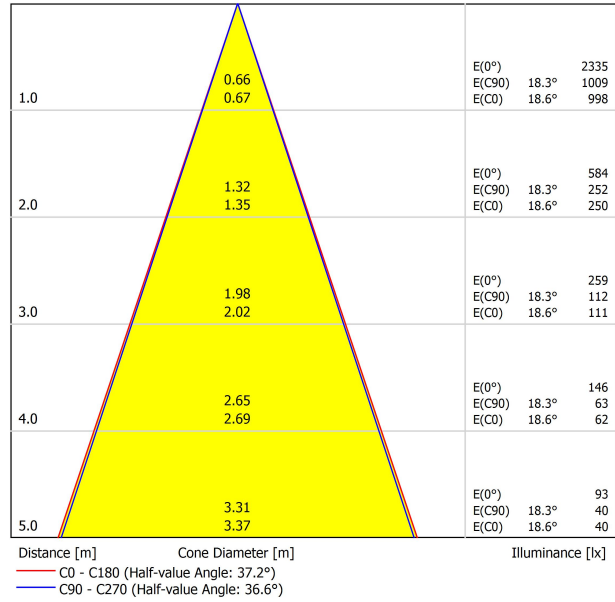

UGR

Glare Evaluation According to UGR													
		70	70	50	30	70	70	50	50	30	70	30	
p Ceiling		70	70	50	30	70	70	50	50	30	70	30	
p Walls		50	30	50	30	50	30	50	30	30	50	30	
p Floor		20	20	20	20	20	20	20	20	20	20	20	
Room Size	Viewing direction at right angles to lamp axis	Viewing direction parallel to lamp axis											
X Y		2H	3H	4H	6H	8H	12H	2H	3H	4H	6H	8H	12H
2H	2H	6.6	7.2	6.8	7.4	7.6	6.6	7.3	6.9	7.5	7.7	6.6	7.3
	3H	8.9	9.5	9.1	9.7	9.9	9.0	9.6	9.3	9.8	10.1	9.0	9.6
	4H	9.9	10.5	10.2	10.7	11.0	10.0	10.6	10.3	10.9	11.1	10.0	10.6
	6H	10.4	11.0	10.8	11.2	11.5	10.6	11.1	10.9	11.4	11.7	10.6	11.1
	8H	10.6	11.1	10.9	11.4	11.7	10.8	11.3	11.1	11.6	11.9	10.8	11.3
4H	2H	7.0	7.5	7.3	7.8	8.1	7.0	7.6	7.3	7.9	8.1	7.0	7.6
	3H	9.8	10.3	10.2	10.6	10.9	9.9	10.4	10.3	10.7	11.0	9.9	10.4
	4H	11.0	11.4	11.4	11.8	12.1	11.1	11.5	11.5	11.9	12.2	11.1	11.5
	6H	11.6	12.0	12.0	12.3	12.7	11.8	12.1	12.2	12.5	12.8	11.8	12.1
	8H	11.9	12.2	12.3	12.5	12.9	12.0	12.3	12.4	12.7	13.1	12.0	12.3
8H	2H	12.0	12.3	12.5	12.7	13.1	12.2	12.4	12.6	12.8	13.3	12.2	12.4
	4H	11.4	11.7	11.8	12.1	12.5	11.5	11.8	11.9	12.2	12.6	11.5	11.8
	6H	12.1	12.4	12.6	12.8	13.2	12.2	12.5	12.7	12.9	13.3	12.2	12.5
	8H	12.4	12.6	12.9	13.1	13.5	12.6	12.8	13.0	13.2	13.7	12.6	12.8
	12H	12.7	12.8	13.2	13.3	13.8	12.8	13.0	13.3	13.4	13.9	12.8	13.0
12H	4H	11.4	11.7	11.8	12.1	12.5	11.5	11.8	11.9	12.2	12.6	11.5	11.8
	6H	12.2	12.4	12.7	12.8	13.3	12.3	12.5	12.8	12.9	13.4	12.3	12.5
	8H	12.6	12.7	13.0	13.2	13.7	12.7	12.8	13.2	13.3	13.8	12.7	12.8
Variation of the observer position for the luminaire distances S													
S = 1.0H		+3.9	-2.6								+3.8	-2.5	
S = 1.5H		+6.3	-3.1								+6.3	-3.1	
S = 2.0H		+8.3	-3.4								+8.2	-3.4	
Standard table		BK02					BK02						
Correction													
Summand		-4.6					-4.5						
Corrected Glare Indices referring to 1330lm Total Luminous Flux													



Fuente de luz (LED) reemplazable por un profesional autorizado

Replaceable (LED only) light source by an authorized professional.

Source lumineuse (LED) remplaçable par un professionnel agréé

Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato

Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado

Replaceable control gear by an authorized professional

Dispositif de commande remplaçable par un professionnel agréé

Alimentatore sostituibile da parte di un professionista autorizzato

Auswechselbares Betriebsgerät durch autorisierten Fachmann

INSTRUCCIONES PARA EL FINAL DE VIDA Y LA ELIMINACIÓN LOS COMPONENTES  
 INSTRUCTIONS ON END-OF-LIFE AND COMPONENT DISPOSAL  
 INSTRUCTIONS POUR LA GESTION DES COMPOSANTS EN FIN DE VIE ET LEUR MISE AU REBUT  
 ISTRUZIONI PER IL FINE VITA E LO SMALTIMENTO DEI COMPONENTI  
 ANWEISUNGEN ZUR ENTSORGUNG DER LEUCHTENKOMPONENTEN



Interrumpir la alimentación del aparato  
 Cut the power supply to the luminaire  
 Couper l'alimentation du luminaire  
 Interrompere l'alimentazione dell'apparecchio  
 Stromversorgung der Leuchte unterbrechen



Quitar la(s) fuente(s) de luz para el desecho  
 Remove light source(s) for disposal  
 Retirer la (les) source(s) lumineuse(s) pour l'élimination  
 Rimuovere la/le sorgente/e di luce per lo smaltimento  
 Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho  
 Remove the battery for decommissioning  
 Retirer la batterie pour sa mise au rebut  
 Rimuovere la batteria per la dismissione  
 Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho  
 Remove control gear for disposal  
 Retirer le dispositif de commande pour l'élimination  
 Rimuovere l'alimentatore per lo smaltimento  
 Betriebsgerät zur Entsorgung ausbauen



Enviar los materiales a un centro de recogida RAEE  
 Send the materials to a WEEE collection centre  
 Envoyer les matériaux dans une déchetterie DEEE  
 Inviare i materiali ad un centro di raccolta RAEE  
 Die Materialien in einem WEEE-Zentrum entsorgen

