



DIMENSIONS



ACCESSORIES



HIGH CHROMATIC LED



BEAM MIXER DIFFUSER



ANTI-GLARE HONEYCOMB LOUVER

AWARDS



PRODUCT

| | |
|-----------|------------------------------|
| Name | POP UP DIM DALI 56° 4000K NT |
| Reference | A2782432NT |
| Color | Textured black |
| RAL | 9005 |
| Category | CEILING RECESSED |

LIGHT SOURCE

| | |
|------------------------|------------------|
| Type | LED |
| Gross luminous flux | 660 lm |
| Colour temperature | 4000 K |
| Chromatic stability | MacAdam Step 2 |
| Colour Rendering Index | CRI > 90 |
| Power | 6,5 W |
| Current | 700 mA |
| Efficacy | 102 lm/W |
| LED lifespan | L90B10 > 55.000h |

LIGHTING FIXTURE | PHOTOMETRIC DATA

| | |
|---------------------|-----|
| Lighting efficiency | 86% |
| Light beam angle | 56° |

LIGHTING FIXTURE | ELECTRICAL DATA

| | |
|-----------------------------|----------------------|
| Driver | Included - Connected |
| Power values of the system | 9,09 W |
| Frequency | 50/60 Hz |
| Dimming | DALI |
| Electrical insulation class | □ |

OTHER DATA

| | |
|----------------------|---------------------------|
| Sealing | IP20 |
| Wireless control | Please Consult |
| Recess measurements | Ø79 mm |
| Swivel angle | 90° |
| Rotation angle | 355° |
| Weight | 365 g |
| Packaged weight | 446 g |
| Packaging dimensions | 159 x 138 x 86 mm |
| Units per package | 1 |
| Materials | Aluminium / Polycarbonate |




Pop Up is one of the smallest recessed spotlights in the world. It combines its small format with formal minimalism to achieve the perfect luminaire for projects that require the least possible space invasion. Pop Up is able to render a luminous flux that allows it to undertake accent lighting functions from the ceiling. It can be moved in practically all the degrees of freedom, as it rotates 355° and can tilt at 90° (unlike the majority of other recessables on the market). It can be easily and smoothly moved by hand.

POLAR DIAGRAM



CONICAL DIAGRAM

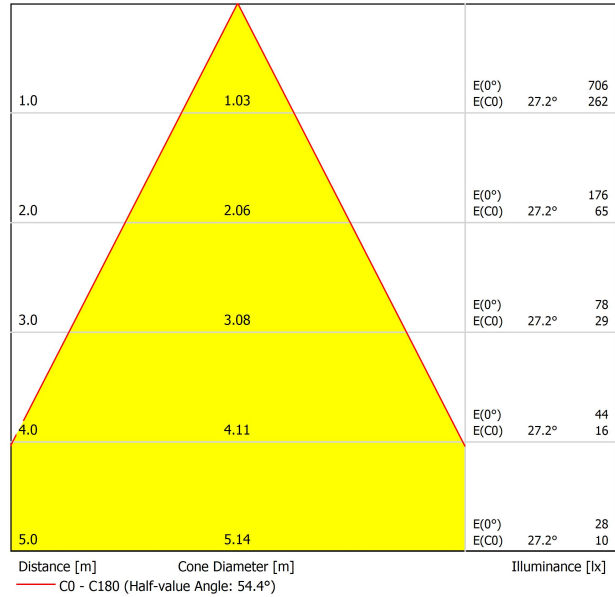

UGR

| Glare Evaluation According to UGR | | | | | | | | | | | |
|--|-------------|--|------|------|------|-------------|---|------|------|------|------|
| ρ Ceiling | 70 | 70 | 50 | 50 | 30 | 70 | 70 | 50 | 50 | 30 | 30 |
| ρ Walls | 50 | 30 | 50 | 30 | 30 | 50 | 30 | 50 | 30 | 30 | 30 |
| ρ Floor | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 |
| Room Size X Y | | Viewing direction at right angles to lamp axis | | | | | Viewing direction parallel to lamp axis | | | | |
| 2H | 2H | 4.3 | 5.0 | 4.6 | 5.2 | 5.4 | 4.3 | 5.0 | 4.6 | 5.2 | 5.4 |
| | 3H | 8.2 | 8.8 | 8.5 | 9.0 | 9.3 | 8.2 | 8.8 | 8.5 | 9.0 | 9.3 |
| | 4H | 10.1 | 10.7 | 10.4 | 10.9 | 11.2 | 10.1 | 10.7 | 10.4 | 10.9 | 11.2 |
| | 6H | 12.1 | 12.6 | 12.4 | 12.9 | 13.2 | 12.1 | 12.6 | 12.4 | 12.9 | 13.2 |
| | 8H | 13.1 | 13.7 | 13.5 | 13.9 | 14.2 | 13.1 | 13.7 | 13.5 | 13.9 | 14.2 |
| 4H | 12H | 14.3 | 14.8 | 14.7 | 15.1 | 15.4 | 14.3 | 14.8 | 14.7 | 15.1 | 15.4 |
| | 2H | 5.6 | 6.1 | 5.9 | 6.4 | 6.6 | 5.6 | 6.1 | 5.9 | 6.4 | 6.6 |
| | 3H | 9.5 | 10.0 | 9.9 | 10.3 | 10.6 | 9.5 | 10.0 | 9.9 | 10.3 | 10.6 |
| | 4H | 11.6 | 12.0 | 12.0 | 12.4 | 12.7 | 11.6 | 12.0 | 12.0 | 12.4 | 12.7 |
| | 6H | 13.7 | 14.1 | 14.2 | 14.5 | 14.8 | 13.7 | 14.1 | 14.2 | 14.5 | 14.8 |
| 8H | 8H | 14.9 | 15.2 | 15.3 | 15.6 | 16.0 | 14.9 | 15.2 | 15.3 | 15.6 | 16.0 |
| | 12H | 16.2 | 16.4 | 16.6 | 16.8 | 17.3 | 16.2 | 16.4 | 16.6 | 16.8 | 17.3 |
| | 4H | 12.4 | 12.7 | 12.8 | 13.1 | 13.5 | 12.4 | 12.7 | 12.8 | 13.1 | 13.5 |
| | 6H | 14.8 | 15.0 | 15.3 | 15.5 | 15.9 | 14.8 | 15.0 | 15.3 | 15.5 | 15.9 |
| | 8H | 16.1 | 16.3 | 16.6 | 16.8 | 17.2 | 16.1 | 16.3 | 16.6 | 16.8 | 17.2 |
| 12H | 12H | 17.6 | 17.8 | 18.1 | 18.2 | 18.7 | 17.6 | 17.8 | 18.1 | 18.2 | 18.7 |
| | 4H | 12.6 | 12.9 | 13.1 | 13.3 | 13.7 | 12.6 | 12.9 | 13.1 | 13.3 | 13.7 |
| | 6H | 15.1 | 15.3 | 15.6 | 15.8 | 16.2 | 15.1 | 15.3 | 15.6 | 15.8 | 16.2 |
| 8H | 16.6 | 16.7 | 17.0 | 17.2 | 17.7 | 16.6 | 16.7 | 17.0 | 17.2 | 17.7 | |
| Variation of the observer position for the luminaire distances S | | | | | | | | | | | |
| S = 1.0H | +4.1 / -2.2 | | | | | +4.1 / -2.2 | | | | | |
| S = 1.5H | +6.7 / -2.6 | | | | | +6.7 / -2.6 | | | | | |
| S = 2.0H | +8.7 / -2.9 | | | | | +8.7 / -2.9 | | | | | |
| Standard table | BK03 | | | | | BK03 | | | | | |
| Correction Summand | 2.3 | | | | | 2.3 | | | | | |
| Corrected Glare Indices referring to 660lm Total Luminous Flux | | | | | | | | | | | |

| Vivid Model Colour Temperature | 2700K | 3000K | 3500K | 4000K | Light Pink |
|-----------------------------------|-------|-------|-------|-------|------------|
| 📖 Reading | | | • | • | |
| 🥬 Fruits & Vegetables | | • | • | | |
| 🍩 Bakery | • | | | | |
| 👤 Retail | | • | • | | |
| 💄 Cosmetics | | | • | • | |
| 🥩 Meat | | | | | • |
| 🐟 Fish | | | | • | |
| 🐠 Seafood | | | | • | • |



For some of its products, Arkoslight offers the possibility to provide them with a special LED, designed to create an illumination focused on visually promoting goods or products for commercial purposes. It is a high chromaticity LED, capable of identifying the colour shades that produce a positive psychological perception of the illuminated object.

This special LED lighting source offers a much more attractive and intense colour range than a conventional LED, besides being much wider. Technically, this is possible thanks to a special LED setting that includes a «special saturation parameter», capable of highlighting the objects colours and materials in such a way that they seem more attractive within the visible light spectrum. To achieve this performance, in each case, the appropriate diode and specific phosphor coating are carefully selected.



| | PRODUCT |
|-----------|---------------------|
| Model | Beam Mixer Diffuser |
| Reference | 08050100 |
| Category | Accessories |

NOT SOLD SEPARATELY.

The Beam Mixer Diffuser is used to smooth beam artifacts caused by parabolic, Fresnel, or TIR lens collimators without significant broadening.

The unique mixing design provides superior far-field smoothing and color mixing with high on-axis brightness. Compared with traditional diffusers, it maintains higher central beam candlepower (CBCP), and produce less undesirable "field light" at higher angles.



| | PRODUCT |
|-----------|-----------------------------|
| Model | Anti-glare Honeycomb Louver |
| Reference | 08060000NT |
| Colour | NT ■ Textured black |
| Category | Accessories |
| | NOT SOLD SEPARATELY. |



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



Fuente de luz (LED) reemplazable por un profesional autorizado

Replaceable (LED only) light source by an authorized professional.

Source lumineuse (LED) remplaçable par un professionnel agréé

Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato

Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado

Replaceable control gear by an authorized professional

Dispositif de commande remplaçable par un professionnel agréé

Alimentatore sostituibile da parte di un professionista autorizzato

Auswechselbares Betriebsgerät durch autorisierten Fachmann

INSTRUCCIONES PARA EL FINAL DE VIDA Y LA ELIMINACIÓN LOS COMPONENTES
 INSTRUCTIONS ON END-OF-LIFE AND COMPONENT DISPOSAL
 INSTRUCTIONS POUR LA GESTION DES COMPOSANTS EN FIN DE VIE ET LEUR MISE AU REBUT
 ISTRUZIONI PER IL FINE VITA E LO SMALTIMENTO DEI COMPONENTI
 ANWEISUNGEN ZUR ENTSORGUNG DER LEUCHTENKOMPONENTEN



Interrumpir la alimentación del aparato
 Cut the power supply to the luminaire
 Couper l'alimentation du luminaire
 Interrompere l'alimentazione dell'apparecchio
 Stromversorgung der Leuchte unterbrechen



Quitar la(s) fuente(s) de luz para el desecho
 Remove light source(s) for disposal
 Retirer la (les) source(s) lumineuse(s) pour l'élimination
 Rimuovere la/le sorgente/e di luce per lo smaltimento
 Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho
 Remove the battery for decommissioning
 Retirer la batterie pour sa mise au rebut
 Rimuovere la batteria per la dismissione
 Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho
 Remove control gear for disposal
 Retirer le dispositif de commande pour l'élimination
 Rimuovere l'alimentatore per lo smaltimento
 Betriebsgerät zur Entsorgung ausbauen



Enviar los materiales a un centro de recogida RAEE
 Send the materials to a WEEE collection centre
 Envoyer les matériaux dans une déchetterie DEEE
 Inviare i materiali ad un centro di raccolta RAEE
 Die Materialien in einem WEEE-Zentrum entsorgen

