




## DIMENSIONS



## AWARDS

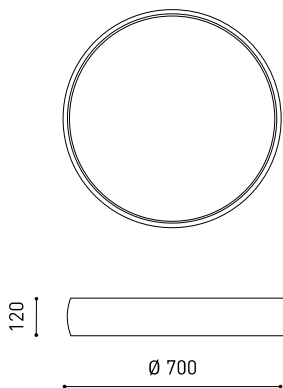

Name	DRUM 70 DIM DALI 3000K WT
Reference	A2391021WT
Color	Textured white
RAL	9016
Category	SURFACE

Type	LED
Gross luminous flux	8050 lm
Colour temperature	3000 K
Chromatic stability	MacAdam Step 2
Colour Rendering Index	CRI > 90
Power	59,5 W
Current	700 mA
Efficacy	135 lm/W
LED lifespan	L80B10 > 60.000h

Lighting efficiency	87%
Light beam angle	96°

Driver	Included
Power values of the system	66,78 W
Frequency	50/60 Hz
Dimming	DALI
Electrical insulation class	⊕

Sealing	IP20
Wireless control	Please Consult
Weight	10500 g
Packaged weight	11534,3 g
Packaging dimensions	765 x 765 x 150 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate

## PRODUCT

## LIGHT SOURCE

## LIGHTING FIXTURE | PHOTOMETRIC DATA


## LIGHTING FIXTURE | ELECTRICAL DATA

## OTHER DATA




A large seized ceiling luminaire offering a major luminous flux, either as surface or as suspended fitting, with the possibility to hang it at any desired height. Drum is dimmable in order to be allowed to adapt the light volume at any time exactly to the specific needs of each application or situation. In terms of forms its design is expressed in a surrounding slightly curved circular strip. Counting with a perfect, homogeneous light diffusion and the attractive illusion of a natural skylight.

POLAR DIAGRAM

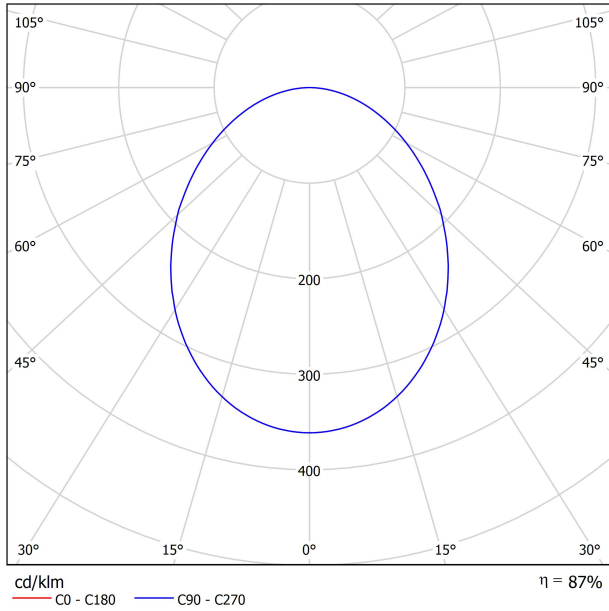

CONICAL DIAGRAM

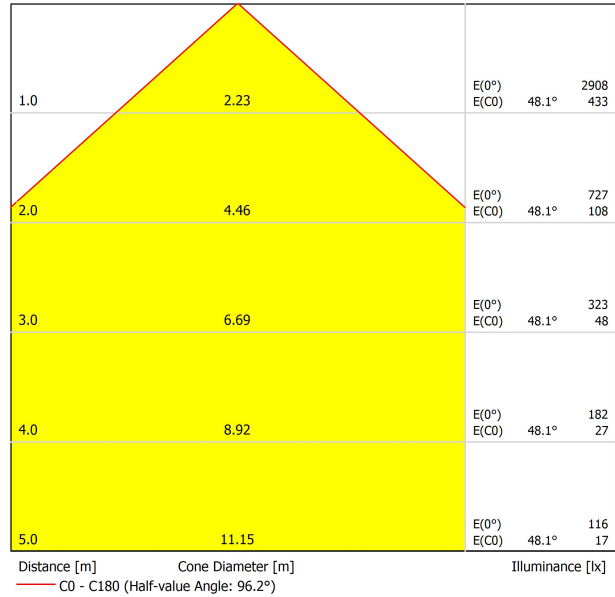

UGR

Glare Evaluation According to UGR											
Room Size		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
X	Y	70	70	50	50	30	70	70	50	50	30
p Ceiling		70	70	50	50	30	70	70	50	50	30
p Walls		50	30	50	30	30	50	30	50	30	30
p Floor		20	20	20	20	20	20	20	20	20	20
2H	2H	18.1	19.4	18.4	19.6	19.8	18.1	19.4	18.4	19.6	19.8
	3H	19.8	20.9	20.1	21.2	21.5	19.8	20.9	20.1	21.2	21.5
	4H	20.4	21.5	20.8	21.8	22.1	20.4	21.5	20.8	21.8	22.1
	6H	21.0	22.0	21.3	22.3	22.6	21.0	22.0	21.3	22.3	22.6
	8H	21.1	22.1	21.5	22.4	22.7	21.1	22.1	21.5	22.4	22.7
	12H	21.3	22.2	21.6	22.5	22.8	21.3	22.2	21.6	22.5	22.8
4H	2H	18.6	19.7	19.0	20.0	20.3	18.6	19.7	19.0	20.0	20.3
	3H	20.6	21.5	20.9	21.8	22.1	20.6	21.5	20.9	21.8	22.1
	4H	21.4	22.2	21.8	22.5	22.9	21.4	22.2	21.8	22.5	22.9
	6H	22.0	22.7	22.4	23.1	23.5	22.0	22.7	22.4	23.1	23.5
	8H	22.3	22.9	22.7	23.3	23.7	22.3	22.9	22.7	23.3	23.7
	12H	22.4	23.0	22.9	23.4	23.9	22.4	23.0	22.9	23.4	23.9
8H	4H	21.7	22.3	22.1	22.7	23.1	21.7	22.3	22.1	22.7	23.1
	6H	22.5	23.0	22.9	23.5	23.9	22.5	23.0	22.9	23.5	23.9
	8H	22.8	23.3	23.3	23.7	24.2	22.8	23.3	23.3	23.7	24.2
	12H	23.1	23.5	23.6	24.0	24.5	23.1	23.5	23.6	24.0	24.5
12H	4H	21.7	22.3	22.2	22.7	23.1	21.7	22.3	22.2	22.7	23.1
	6H	22.6	23.0	23.0	23.5	24.0	22.6	23.0	23.0	23.5	24.0
	8H	22.9	23.3	23.4	23.8	24.3	22.9	23.3	23.4	23.8	24.3
Variation of the observer position for the luminaire distances S											
S = 1.0H		+0.1 / -0.1					+0.1 / -0.1				
S = 1.5H		+0.2 / -0.4					+0.2 / -0.4				
S = 2.0H		+0.4 / -0.7					+0.4 / -0.7				
Standard table		BK06					BK06				
Correction Summand		-2.0					-2.0				
Corrected Glare Indices referring to 8050lm Total Luminous Flux											



Fuente de luz (LED) reemplazable por un profesional autorizado

Replaceable (LED only) light source by an authorized professional.

Source lumineuse (LED) remplaçable par un professionnel agréé

Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato

Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado

Replaceable control gear by an authorized professional

Dispositif de commande remplaçable par un professionnel agréé

Alimentatore sostituibile da parte di un professionista autorizzato

Auswechselbares Betriebsgerät durch autorisierten Fachmann

INSTRUCCIONES PARA EL FINAL DE VIDA Y LA ELIMINACIÓN LOS COMPONENTES  
 INSTRUCTIONS ON END-OF-LIFE AND COMPONENT DISPOSAL  
 INSTRUCTIONS POUR LA GESTION DES COMPOSANTS EN FIN DE VIE ET LEUR MISE AU REBUT  
 ISTRUZIONI PER IL FINE VITA E LO SMALTIMENTO DEI COMPONENTI  
 ANWEISUNGEN ZUR ENTSORGUNG DER LEUCHTENKOMPONENTEN



Interrumpir la alimentación del aparato  
 Cut the power supply to the luminaire  
 Couper l'alimentation du luminaire  
 Interrompere l'alimentazione dell'apparecchio  
 Stromversorgung der Leuchte unterbrechen



Quitar la(s) fuente(s) de luz para el desecho  
 Remove light source(s) for disposal  
 Retirer la (les) source(s) lumineuse(s) pour l'élimination  
 Rimuovere la/le sorgente/e di luce per lo smaltimento  
 Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho  
 Remove the battery for decommissioning  
 Retirer la batterie pour sa mise au rebut  
 Rimuovere la batteria per la dismissione  
 Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho  
 Remove control gear for disposal  
 Retirer le dispositif de commande pour l'élimination  
 Rimuovere l'alimentatore per lo smaltimento  
 Betriebsgerät zur Entsorgung ausbauen



Enviar los materiales a un centro de recogida RAEE  
 Send the materials to a WEEE collection centre  
 Envoyer les matériaux dans une déchetterie DEEE  
 Inviare i materiali ad un centro di raccolta RAEE  
 Die Materialien in einem WEEE-Zentrum entsorgen

