




## DIMENSIONS



## AWARDS



Name	PUCK RECESSED IP54 M DIM DALI/PUSH 2700K NT
Reference	A3141020NT
Color	Textured black
RAL	9005
Category	CEILING RECESSED

## LIGHT SOURCE

Type	LED
Gross luminous flux	1090 lm
Colour temperature	2700 K
Chromatic stability	MacAdam Step 2
Colour Rendering Index	CRI > 90
Power	9 W
Current	500 mA
Efficacy	121 lm/W
LED lifespan	L80B10 > 60.000h

## LIGHTING FIXTURE | PHOTOMETRIC DATA

Lighting efficiency	80%
Light beam angle	45°

## LIGHTING FIXTURE | ELECTRICAL DATA

Driver	Included - Connected
Power values of the system	11,44 W
Frequency	50/60 Hz
Dimming	DALI / Push - Other DIM, please consult
Electrical insulation class	□


## OTHER DATA

Sealing	IP54
Wireless control	Please Consult
Emergency power supply	Please Consult
Recess measurements	Ø73 mm
Weight	326 g
Packaged weight	380 g
Packaging dimensions	158 x 156 x 59 mm
Units per package	1
Materials	Aluminium / Optical Glass




Puck Recessed is the Puck version for recessed applications. Puck Recessed aims to fulfill the functions of general lighting. Its discreet presence takes the shape of a circular piece, totally made of aluminium, with a slight rounded slant to hold the light source back a few centimetres.

POLAR DIAGRAM

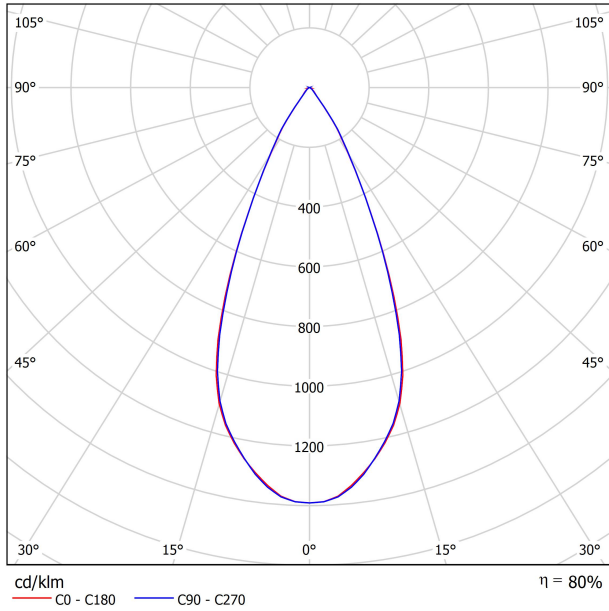

CONICAL DIAGRAM

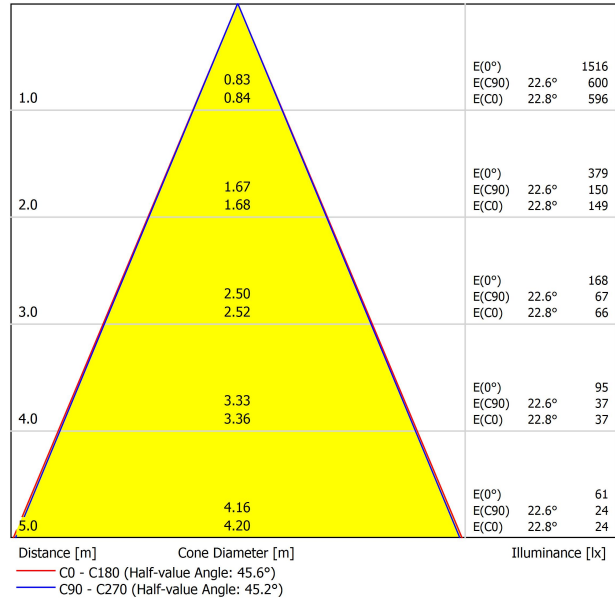

UGR

Glare Evaluation According to UGR												
		70	70	50	50	30	70	70	50	50	30	30
p Ceiling		70	70	50	50	30	70	70	50	50	30	30
p Walls		50	30	50	30	30	50	30	50	30	30	30
p Floor		20	20	20	20	20	20	20	20	20	20	20
Room Size	Viewing direction at right angles to lamp axis	Viewing direction parallel to lamp axis										
X Y												
2H	2H	5.4	6.1	5.7	6.3	6.5	5.1	5.7	5.3	5.9	6.1	
	3H	6.3	6.9	6.6	7.1	7.4	6.3	6.9	6.6	7.2	7.4	
	4H	7.9	8.5	8.2	8.8	9.0	8.1	8.6	8.4	8.9	9.1	
	6H	8.5	9.0	8.8	9.3	9.6	8.6	9.1	8.9	9.4	9.7	
	8H	8.6	9.1	8.9	9.4	9.7	8.7	9.2	9.1	9.5	9.8	
4H	12H	8.7	9.1	9.0	9.4	9.8	8.8	9.3	9.1	9.6	9.9	
	2H	5.6	6.2	5.9	6.4	6.7	5.3	5.8	5.6	6.1	6.4	
	3H	7.1	7.6	7.5	7.9	8.2	7.2	7.7	7.5	8.0	8.3	
	4H	9.0	9.4	9.3	9.7	10.0	9.1	9.5	9.5	9.8	10.2	
	6H	9.6	10.0	10.0	10.3	10.7	9.7	10.1	10.1	10.4	10.8	
8H	8H	9.8	10.1	10.2	10.4	10.8	9.9	10.2	10.3	10.6	11.0	
	12H	9.8	10.1	10.3	10.5	10.9	10.0	10.2	10.4	10.6	11.0	
	4H	9.4	9.7	9.9	10.1	10.5	9.5	9.8	10.0	10.2	10.6	
	6H	10.2	10.4	10.6	10.8	11.3	10.2	10.5	10.7	10.9	11.3	
	8H	10.3	10.5	10.8	11.0	11.4	10.5	10.7	10.9	11.1	11.6	
12H	12H	10.5	10.6	10.9	11.1	11.6	10.6	10.7	11.1	11.2	11.7	
	4H	9.5	9.7	9.9	10.1	10.5	9.6	9.8	10.0	10.2	10.6	
	6H	10.2	10.4	10.7	10.8	11.3	10.3	10.5	10.7	10.9	11.4	
	8H	10.4	10.6	10.9	11.0	11.5	10.5	10.7	11.0	11.1	11.6	
	Variation of the observer position for the luminaire distances S											
S = 1.0H		+4.5 / -3.3					+4.7 / -3.4					
S = 1.5H		+7.2 / -4.1					+7.3 / -4.0					
S = 2.0H		+9.1 / -5.0					+9.2 / -4.8					
Standard table Correction Summand		BK01 -5.2					BK01 -5.1					
Corrected Glare Indices referring to 1090lm Total Luminous Flux												



Fuente de luz (LED) reemplazable por un profesional autorizado  
 Replaceable (LED only) light source by an authorized professional.  
 Source lumineuse (LED) remplaçable par un professionnel agréé  
 Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato  
 Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado  
 Replaceable control gear by an authorized professional  
 Dispositif de commande remplaçable par un professionnel agréé  
 Alimentatore sostituibile da parte di un professionista autorizzato  
 Auswechselbares Betriebsgerät durch autorisierten Fachmann

INSTRUCCIONES PARA EL FINAL DE VIDA Y LA ELIMINACIÓN LOS COMPONENTES  
 INSTRUCTIONS ON END-OF-LIFE AND COMPONENT DISPOSAL  
 INSTRUCTIONS POUR LA GESTION DES COMPOSANTS EN FIN DE VIE ET LEUR MISE AU REBUT  
 ISTRUZIONI PER IL FINE VITA E LO SMALTIMENTO DEI COMPONENTI  
 ANWEISUNGEN ZUR ENTSORGUNG DER LEUCHTENKOMPONENTEN



Interrumpir la alimentación del aparato  
 Cut the power supply to the luminaire  
 Couper l'alimentation du luminaire  
 Interrompere l'alimentazione dell'apparecchio  
 Stromversorgung der Leuchte unterbrechen



Quitar la(s) fuente(s) de luz para el desecho  
 Remove light source(s) for disposal  
 Retirer la (les) source(s) lumineuse(s) pour l'élimination  
 Rimuovere la/le sorgente/e di luce per lo smaltimento  
 Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho  
 Remove the battery for decommissioning  
 Retirer la batterie pour sa mise au rebut  
 Rimuovere la batteria per la dismissione  
 Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho  
 Remove control gear for disposal  
 Retirer le dispositif de commande pour l'élimination  
 Rimuovere l'alimentatore per lo smaltimento  
 Betriebsgerät zur Entsorgung ausbauen

Enviar los materiales a un centro de recogida RAEE  
 Send the materials to a WEEE collection centre  
 Envoyer les matériaux dans une déchetterie DEEE  
 Inviare i materiali ad un centro di raccolta RAEE  
 Die Materialien in einem WEEE-Zentrum entsorgen

