




DIMENSIONS



ACCESSORIES

ANTI-GLARE HONEYCOMB
LOUVER

PRODUCT

Name	FIT 35 SURFACE DOUBLE SPOT DIM PH.CUT 4000K NT
Reference	A3454512NT
Color	Textured black
Base Finishing	Textured black
RAL	9005
Category	SURFACE

LIGHT SOURCE

Type	LED
Gross luminous flux	2 X 710 lm
Colour temperature	4000 K
Chromatic stability	MacAdam Step 2
Colour Rendering Index	CRI>90
Power	11 W
Current	500 mA
Efficacy	127 lm/W
LED lifespan	L90B10 >108.000h

LIGHTING FIXTURE | PHOTOMETRIC DATA

Lighting efficiency	85%
Light beam angle	20°

LIGHTING FIXTURE | ELECTRICAL DATA

Driver	Included
Power values of the system	13,19 W
Frequency	50/60 Hz
Dimming	Phase Cut - Other DIM, please consult
Electrical insulation class	☐


OTHER DATA

Sealing	IP20
Swivel angle	90°
Rotation angle	355°
Weight	750 g
Packaged weight	860 g
Packaging dimensions	230 x 175 x 68 mm
Units per package	1
Materials	Aluminium / Polycarbonate




Fit 35 Surface is a multipurpose surface projector with rational geometry. Its range of movement enables illuminating spaces while maintaining a contemporary and minimalist aesthetic.

POLAR DIAGRAM

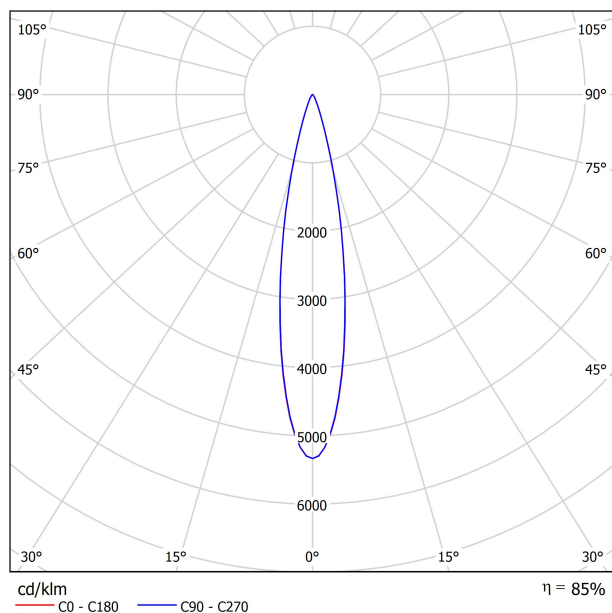

CONICAL DIAGRAM

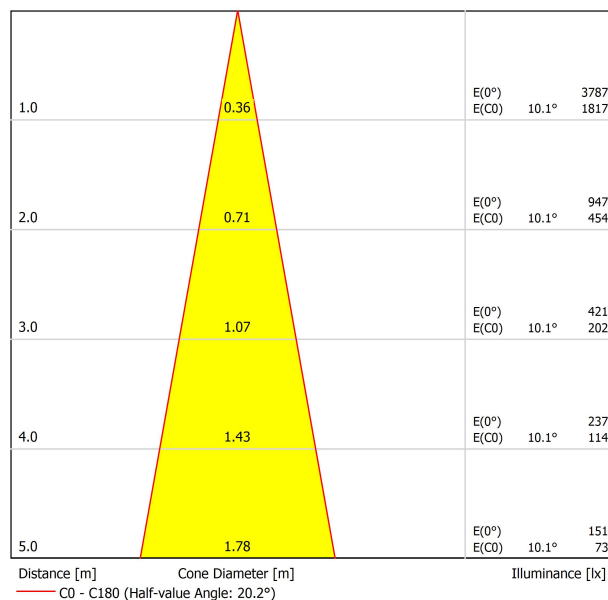

UGR

Glare Evaluation According to UGR												
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
		70	70	50	50	30	70	70	50	50	30	30
p Ceiling		50	30	50	30	30	50	30	50	30	30	30
p Walls		20	20	20	20	20	20	20	20	20	20	20
p Floor		20	20	20	20	20	20	20	20	20	20	20
2H		2H	7.7	8.4	8.0	8.6	8.8	9.0	9.7	9.3	9.9	10.1
3H		3H	9.6	10.2	9.9	10.4	10.7	9.9	10.5	10.2	10.7	11.0
4H		4H	11.4	11.9	11.7	12.2	12.4	11.6	12.2	11.9	12.4	12.7
6H		6H	12.3	12.8	12.6	13.1	13.4	12.1	12.6	12.4	12.9	13.2
8H		8H	12.4	12.9	12.7	13.2	13.5	12.2	12.7	12.5	13.0	13.3
12H		12H <td>12.5</td> <td>12.9</td> <td>12.8</td> <td>13.2</td> <td>13.6</td> <td>13.4</td> <td>13.9</td> <td>13.7</td> <td>14.2</td> <td>14.5</td>	12.5	12.9	12.8	13.2	13.6	13.4	13.9	13.7	14.2	14.5
4H		2H <td>8.5</td> <td>9.1</td> <td>8.8</td> <td>9.3</td> <td>9.6</td> <td>9.5</td> <td>10.1</td> <td>9.8</td> <td>10.3</td> <td>10.6</td>	8.5	9.1	8.8	9.3	9.6	9.5	10.1	9.8	10.3	10.6
3H		3H <td>10.2</td> <td>10.7</td> <td>10.5</td> <td>11.0</td> <td>11.3</td> <td>10.4</td> <td>10.9</td> <td>10.7</td> <td>11.2</td> <td>11.5</td>	10.2	10.7	10.5	11.0	11.3	10.4	10.9	10.7	11.2	11.5
4H		4H <td>12.2</td> <td>12.6</td> <td>12.6</td> <td>12.9</td> <td>13.3</td> <td>12.3</td> <td>12.7</td> <td>12.6</td> <td>13.0</td> <td>13.3</td>	12.2	12.6	12.6	12.9	13.3	12.3	12.7	12.6	13.0	13.3
6H		6H <td>13.3</td> <td>13.7</td> <td>13.7</td> <td>14.0</td> <td>14.4</td> <td>13.0</td> <td>13.3</td> <td>13.4</td> <td>13.7</td> <td>14.1</td>	13.3	13.7	13.7	14.0	14.4	13.0	13.3	13.4	13.7	14.1
8H		8H <td>13.5</td> <td>13.7</td> <td>13.9</td> <td>14.1</td> <td>14.5</td> <td>13.1</td> <td>13.4</td> <td>13.5</td> <td>13.8</td> <td>14.2</td>	13.5	13.7	13.9	14.1	14.5	13.1	13.4	13.5	13.8	14.2
12H		12H <td>13.6</td> <td>13.9</td> <td>14.1</td> <td>14.3</td> <td>14.7</td> <td>14.7</td> <td>14.9</td> <td>15.1</td> <td>15.3</td> <td>15.7</td>	13.6	13.9	14.1	14.3	14.7	14.7	14.9	15.1	15.3	15.7
8H		4H <td>12.7</td> <td>13.0</td> <td>13.1</td> <td>13.4</td> <td>13.8</td> <td>12.7</td> <td>13.0</td> <td>13.2</td> <td>13.4</td> <td>13.8</td>	12.7	13.0	13.1	13.4	13.8	12.7	13.0	13.2	13.4	13.8
6H		6H <td>13.8</td> <td>14.0</td> <td>14.2</td> <td>14.4</td> <td>14.9</td> <td>13.5</td> <td>13.7</td> <td>13.9</td> <td>14.1</td> <td>14.6</td>	13.8	14.0	14.2	14.4	14.9	13.5	13.7	13.9	14.1	14.6
8H		8H <td>14.0</td> <td>14.2</td> <td>14.4</td> <td>14.6</td> <td>15.1</td> <td>13.8</td> <td>13.9</td> <td>14.2</td> <td>14.4</td> <td>14.8</td>	14.0	14.2	14.4	14.6	15.1	13.8	13.9	14.2	14.4	14.8
12H		12H <td>14.3</td> <td>14.5</td> <td>14.8</td> <td>14.9</td> <td>15.4</td> <td>15.7</td> <td>15.8</td> <td>16.2</td> <td>16.3</td> <td>16.8</td>	14.3	14.5	14.8	14.9	15.4	15.7	15.8	16.2	16.3	16.8
12H		4H <td>12.7</td> <td>13.0</td> <td>13.1</td> <td>13.4</td> <td>13.8</td> <td>12.8</td> <td>13.0</td> <td>13.2</td> <td>13.4</td> <td>13.8</td>	12.7	13.0	13.1	13.4	13.8	12.8	13.0	13.2	13.4	13.8
6H		6H <td>13.8</td> <td>14.0</td> <td>14.3</td> <td>14.4</td> <td>14.9</td> <td>13.5</td> <td>13.7</td> <td>14.0</td> <td>14.1</td> <td>14.6</td>	13.8	14.0	14.3	14.4	14.9	13.5	13.7	14.0	14.1	14.6
8H		8H <td>14.1</td> <td>14.2</td> <td>14.6</td> <td>14.7</td> <td>15.2</td> <td>13.9</td> <td>14.1</td> <td>14.4</td> <td>14.5</td> <td>15.0</td>	14.1	14.2	14.6	14.7	15.2	13.9	14.1	14.4	14.5	15.0
Variation of the observer position for the luminaire distances S												
S = 1.0H		+1.7 / -0.8					+1.4 / -0.7					
S = 1.5H		+3.4 / -1.4					+2.9 / -1.1					
S = 2.0H		+5.1 / -2.0					+4.5 / -2.4					
Standard table		BK03					BK04					
Correction		-2.3					-1.5					
Summand												
Corrected Glare Indices referring to 700lm Total Luminous Flux												



DRIVER


0000-94-45	DRIVER PHASE CUT 15W 500mA
------------	----------------------------

PHASE CUT DIMMERS TESTED FOR COMPATIBILITY:

Brand / Manufacturer	Model number	Dimming Type
Berker	2874	Trailing edge
Busch-Jaeger	6513 U-102	Trailing edge
Busch-Jaeger	6523 U-102	Trailing edge
Busch-Jaeger	6523 UR-103	Trailing edge
Clipsal	32E450UDM	Trailing edge
Egant	U327	Trailing edge
Etman	ETM321P	Trailing edge
Etman	ETM322P	Trailing edge
HZC Electric	AU-P3	Trailing edge
Jung	225 TDE	Trailing edge
Jung	LB-Management	Trailing edge
Legrand HPM	CAT400T	Trailing edge
Merten	SBD200LED (MEG5134-0000)	Trailing edge
Niko	310-0190X	Trailing edge
Schneider	CCTSE12011	Trailing edge
Schneider	SBD315RC	Trailing edge
Casambi	CBU-TED	Trailing edge

THE PARTICULAR CONDITIONS OF EACH INSTALLATION AND THE SPECIFICATIONS AND CONDITIONS OF USE OF EACH REGULATOR, MAY DIFFER FROM THOSE CONSIDERED IN THE COMPATIBILITY TESTING, AND AFFECT ITS PERFORMANCE IN SAID INSTALLATION.

FOR MORE INFO, PLEASE CONSULT



	PRODUCT
Model	Anti-glare Honeycomb Louver
Reference	A345-00-00
Category	Accessories

NOT SOLD SEPARATELY.



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



Fuente de luz (LED) reemplazable por un profesional autorizado

Replaceable (LED only) light source by an authorized professional.

Source lumineuse (LED) remplaçable par un professionnel agréé

Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato

Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado

Replaceable control gear by an authorized professional

Dispositif de commande remplaçable par un professionnel agréé

Alimentatore sostituibile da parte di un professionista autorizzato

Auswechselbares Betriebsgerät durch autorisierten Fachmann

INSTRUCCIONES PARA EL FINAL DE VIDA Y LA ELIMINACIÓN LOS COMPONENTES

INSTRUCTIONS ON END-OF-LIFE AND COMPONENT DISPOSAL

INSTRUCTIONS POUR LA GESTION DES COMPOSANTS EN FIN DE VIE ET LEUR MISE AU REBUT

ISTRUZIONI PER IL FINE VITA E LO SMALTIMENTO DEI COMPONENTI

ANWEISUNGEN ZUR ENTSORGUNG DER LEUCHTENKOMPONENTEN



Interrumpir la alimentación del aparato

Cut the power supply to the luminaire

Couper l'alimentation du luminaire

Interrompere l'alimentazione dell'apparecchio

Stromversorgung der Leuchte unterbrechen




Quitar la(s) fuente(s) de luz para el desecho

Remove light source(s) for disposal

Retirer la (les) source(s) lumineuse(s) pour l'élimination

Rimuovere la/le sorgente/e di luce per lo smaltimento

Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho

Remove the battery for decommissioning

Retirer la batterie pour sa mise au rebut

Rimuovere la batteria per la dismissione

Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho

Remove control gear for disposal

Retirer le dispositif de commande pour l'élimination

Rimuovere l'alimentatore per lo smaltimento

Betriebsgerät zur Entsorgung ausbauen

Enviar los materiales a un centro de recogida RAEE

Send the materials to a WEEE collection centre

Envoyer les matériaux dans une déchetterie DEEE

Inviare i materiali ad un centro di raccolta RAEE

Die Materialien in einem WEEE-Zentrum entsorgen

