



DIMENSIONS



AWARDS



| | |
|-----------|-----------------------------|
| Name | LEX MINI DALI DIM TO WARM N |
| Reference | A3780029N |
| Color | Matt black |
| RAL | 9005 |
| Category | CEILING RECESSED |

| | |
|------------------------|---------------------------|
| Type | LED |
| Gross luminous flux | 1265 lm |
| Colour temperature | Dim to warm 3000 - 1800 K |
| Chromatic stability | MacAdam Step 3 |
| Colour Rendering Index | CRI > 90 |
| Power | 11,5 W |
| Current | 350 mA |
| Efficacy | 110 lm/W |
| LED lifespan | L90B10 > 55.000h |

| | |
|---------------------|-----|
| Lighting efficiency | 60% |
| Light beam angle | 72° |

| | |
|-----------------------------|----------------------------------|
| Driver | Included |
| Power values of the system | 13,79 W |
| Frequency | 50/60 Hz |
| Dimming | DALI - Other DIM, please consult |
| Electrical insulation class | <input type="checkbox"/> |

| | |
|------------------------|---------------------------|
| Sealing | IP20 |
| Wireless control | Please Consult |
| Emergency power supply | Please Consult |
| Recess measurements | Ø105 mm |
| Weight | 366 g |
| Packaged weight | 511 g |
| Packaging dimensions | 194 x 163 x 119 mm |
| Units per package | 1 |
| Materials | Aluminium / Polycarbonate |

PRODUCT

LIGHT SOURCE

LIGHTING FIXTURE | PHOTOMETRIC DATA


LIGHTING FIXTURE | ELECTRICAL DATA

OTHER DATA




Lex Mini is the smaller version of Lex. Like its big brother, it offers high visual comfort thanks to the double setback of its LED which is located further back in the luminaire, and housed, too, at the end of a second screen. Its mini size is coherent with its proportions, harmonious in relation to its power and flux.

POLAR DIAGRAM

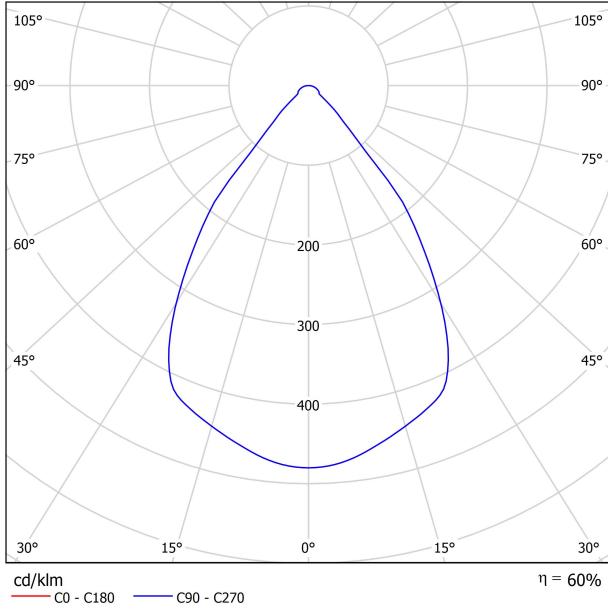

CONICAL DIAGRAM

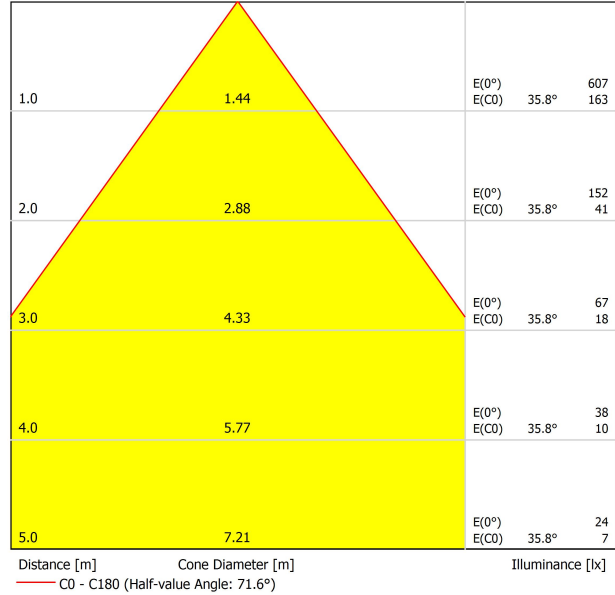

UGR

| Glare Evaluation According to UGR | | | | | | | | | | | | | | | | |
|--|--|---|------|------|------|------|-------------|------|------|------|------|------|------|------|------|------|
| | | 70 | 70 | 50 | 50 | 30 | 70 | 70 | 50 | 50 | 30 | 30 | | | | |
| p Ceiling | | 50 | 30 | 50 | 30 | 30 | 50 | 30 | 50 | 30 | 30 | 30 | | | | |
| p Walls | | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | | | | |
| p Floor | | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | | | | |
| Room Size | Viewing direction at right angles to lamp axis | Viewing direction parallel to lamp axis | | | | | | | | | | | | | | |
| X Y | | 2H | 4H | 6H | 8H | 12H | 2H | 4H | 6H | 8H | 12H | 2H | 4H | 6H | 8H | 12H |
| 2H | 2H | 11.2 | 11.9 | 11.4 | 12.1 | 12.3 | 11.2 | 11.9 | 11.4 | 12.1 | 12.3 | 11.2 | 11.9 | 11.4 | 12.1 | 12.3 |
| | 3H | 13.4 | 14.1 | 13.7 | 14.3 | 14.6 | 13.4 | 14.1 | 13.7 | 14.3 | 14.6 | 13.4 | 14.1 | 13.7 | 14.3 | 14.6 |
| | 4H | 14.3 | 14.9 | 14.6 | 15.2 | 15.5 | 14.3 | 14.9 | 14.6 | 15.2 | 15.5 | 14.3 | 14.9 | 14.6 | 15.2 | 15.5 |
| | 6H | 15.0 | 15.7 | 15.4 | 15.9 | 16.2 | 15.0 | 15.7 | 15.4 | 15.9 | 16.2 | 15.0 | 15.7 | 15.4 | 15.9 | 16.2 |
| | 8H | 15.4 | 16.0 | 15.7 | 16.2 | 16.6 | 15.4 | 16.0 | 15.7 | 16.2 | 16.6 | 15.4 | 16.0 | 15.7 | 16.2 | 16.6 |
| | 12H | 15.6 | 16.2 | 16.0 | 16.5 | 16.8 | 15.6 | 16.2 | 16.0 | 16.5 | 16.8 | 15.6 | 16.2 | 16.0 | 16.5 | 16.8 |
| 4H | 2H | 11.9 | 12.6 | 12.2 | 12.8 | 13.1 | 11.9 | 12.6 | 12.2 | 12.8 | 13.1 | 11.9 | 12.6 | 12.2 | 12.8 | 13.1 |
| | 3H | 14.3 | 14.9 | 14.7 | 15.2 | 15.5 | 14.3 | 14.9 | 14.7 | 15.2 | 15.5 | 14.3 | 14.9 | 14.7 | 15.2 | 15.5 |
| | 4H | 15.4 | 15.9 | 15.8 | 16.2 | 16.6 | 15.4 | 15.9 | 15.8 | 16.2 | 16.6 | 15.4 | 15.9 | 15.8 | 16.2 | 16.6 |
| | 6H | 16.3 | 16.7 | 16.7 | 17.1 | 17.5 | 16.3 | 16.7 | 16.7 | 17.1 | 17.5 | 16.3 | 16.7 | 16.7 | 17.1 | 17.5 |
| | 8H | 16.7 | 17.1 | 17.1 | 17.4 | 17.8 | 16.7 | 17.1 | 17.1 | 17.4 | 17.8 | 16.7 | 17.1 | 17.1 | 17.4 | 17.8 |
| | 12H | 17.0 | 17.3 | 17.4 | 17.7 | 18.2 | 17.0 | 17.3 | 17.4 | 17.7 | 18.2 | 17.0 | 17.3 | 17.4 | 17.7 | 18.2 |
| 8H | 4H | 15.8 | 16.2 | 16.2 | 16.5 | 16.9 | 15.8 | 16.2 | 16.2 | 16.5 | 16.9 | 15.8 | 16.2 | 16.2 | 16.5 | 16.9 |
| | 6H | 16.9 | 17.2 | 17.3 | 17.6 | 18.0 | 16.9 | 17.2 | 17.3 | 17.6 | 18.0 | 16.9 | 17.2 | 17.3 | 17.6 | 18.0 |
| | 8H | 17.4 | 17.6 | 17.8 | 18.1 | 18.5 | 17.4 | 17.6 | 17.8 | 18.1 | 18.5 | 17.4 | 17.6 | 17.8 | 18.1 | 18.5 |
| | 12H | 17.8 | 18.0 | 18.3 | 18.5 | 19.0 | 17.8 | 18.0 | 18.3 | 18.5 | 19.0 | 17.8 | 18.0 | 18.3 | 18.5 | 19.0 |
| 12H | 4H | 15.8 | 16.2 | 16.3 | 16.6 | 17.0 | 15.8 | 16.2 | 16.3 | 16.6 | 17.0 | 15.8 | 16.2 | 16.3 | 16.6 | 17.0 |
| | 6H | 17.0 | 17.2 | 17.5 | 17.7 | 18.2 | 17.0 | 17.2 | 17.5 | 17.7 | 18.2 | 17.0 | 17.2 | 17.5 | 17.7 | 18.2 |
| | 8H | 17.5 | 17.8 | 18.0 | 18.2 | 18.7 | 17.5 | 17.8 | 18.0 | 18.2 | 18.7 | 17.5 | 17.8 | 18.0 | 18.2 | 18.7 |
| Variation of the observer position for the luminaire distances S | | | | | | | | | | | | | | | | |
| S = 1.0H | | +2.4 / -1.8 | | | | | +2.4 / -1.8 | | | | | | | | | |
| S = 1.5H | | +4.5 / -2.0 | | | | | +4.5 / -2.0 | | | | | | | | | |
| S = 2.0H | | +6.3 / -2.3 | | | | | +6.3 / -2.3 | | | | | | | | | |
| Standard table | | BK03 | | | | | BK03 | | | | | | | | | |
| Correction Summand | | -1.0 | | | | | -1.0 | | | | | | | | | |
| Corrected Glare Indices referring to 1265lm Total Luminous Flux | | | | | | | | | | | | | | | | |



Fuente de luz (LED) reemplazable por un profesional autorizado

Replaceable (LED only) light source by an authorized professional.

Source lumineuse (LED) remplaçable par un professionnel agréé

Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato

Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado

Replaceable control gear by an authorized professional

Dispositif de commande remplaçable par un professionnel agréé

Alimentatore sostituibile da parte di un professionista autorizzato

Auswechselbares Betriebsgerät durch autorisierten Fachmann

INSTRUCCIONES PARA EL FINAL DE VIDA Y LA ELIMINACIÓN LOS COMPONENTES
 INSTRUCTIONS ON END-OF-LIFE AND COMPONENT DISPOSAL
 INSTRUCTIONS POUR LA GESTION DES COMPOSANTS EN FIN DE VIE ET LEUR MISE AU REBUT
 ISTRUZIONI PER IL FINE VITA E LO SMALTIMENTO DEI COMPONENTI
 ANWEISUNGEN ZUR ENTSORGUNG DER LEUCHTENKOMPONENTEN



Interrumpir la alimentación del aparato
 Cut the power supply to the luminaire
 Couper l'alimentation du luminaire
 Interrompere l'alimentazione dell'apparecchio
 Stromversorgung der Leuchte unterbrechen



Quitar la(s) fuente(s) de luz para el desecho
 Remove light source(s) for disposal
 Retirer la (les) source(s) lumineuse(s) pour l'élimination
 Rimuovere la/le sorgente/e di luce per lo smaltimento
 Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho
 Remove the battery for decommissioning
 Retirer la batterie pour sa mise au rebut
 Rimuovere la batteria per la dismissione
 Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho
 Remove control gear for disposal
 Retirer le dispositif de commande pour l'élimination
 Rimuovere l'alimentatore per lo smaltimento
 Betriebsgerät zur Entsorgung ausbauen



Enviar los materiales a un centro de recogida RAEE
 Send the materials to a WEEE collection centre
 Envoyer les matériaux dans une déchetterie DEEE
 Inviare i materiali ad un centro di raccolta RAEE
 Die Materialien in einem WEEE-Zentrum entsorgen

