




DIMENSIONS



ACCESSORIES



MINIMAL TRACK OPTIONS

AWARDS



red dot winner 2020
innovative product
& lighting design



Bronze Delta
ADI Awards 2020



HONORABLE MENTION
EUROPEAN
PRODUCT
DESIGN
AWARD



WINNER
2020



WINNER 2020



ORO

PRODUCT

Name	LINE MICRO 1000 24V 3000K WT
Reference	A3952001WT
Color	Textured white
RAL	9016
Category	TRACK LIGHTS

LIGHT SOURCE

Type	LED
Gross luminous flux	1500 lm
Colour temperature	3000 K
Chromatic stability	MacAdam Step 2
Colour Rendering Index	CRI > 90
Power	9 W
Efficacy	167 lm/W
LED lifespan	L80B10 > 60.000h

LIGHTING FIXTURE | PHOTOMETRIC DATA

Lighting efficiency	70%
Light beam angle	113°

LIGHTING FIXTURE | ELECTRICAL DATA


Power values of the system	10,22 W
Dimming	DIM options
Electrical insulation class	II

OTHER DATA


Sealing	IP20
Wireless control	Please Consult
Track type	Minimal Track
Weight	330 g
Packaged weight	440 g
Packaging dimensions	1015 x 46 x 40 mm
Units per package	1
Materials	Aluminium / Polycarbonate

Line Micro 24V, is the line-luminary of diffused light for Minimal Track applications. This lighting solution allows Arkoslight's 24V tracklight to combine accent lighting with longitudinal general lighting where required.

POLAR DIAGRAM

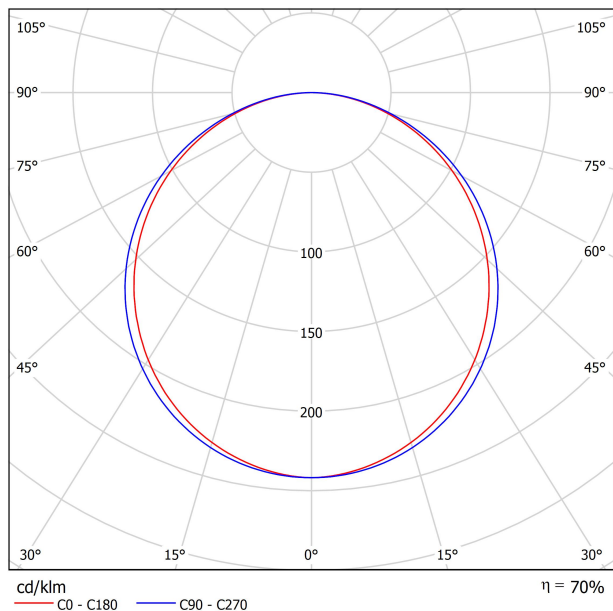

CONICAL DIAGRAM

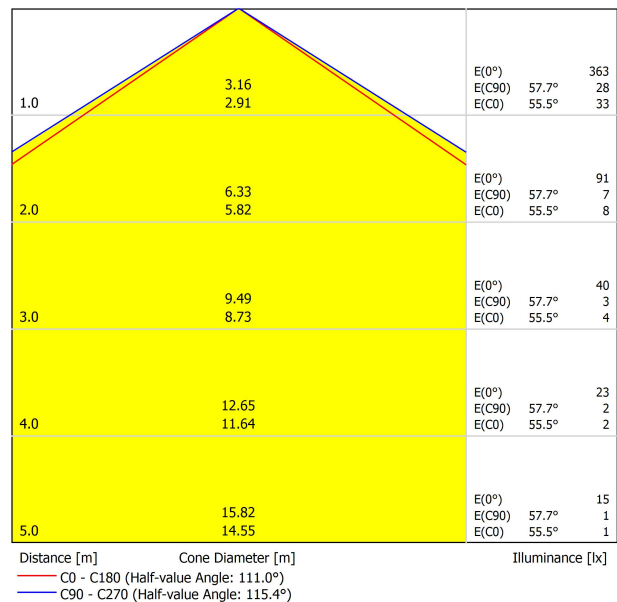


UGR

Glare Evaluation According to UGR													
		70	70	50	50	30	70	70	50	50	30	30	
a Ceiling													
p Walls													
p Floor													
		20	20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis						
2H	ZH	22.6	23.9	22.9	24.1	24.4	22.8	24.2	23.1	24.4	24.7		
	3H	24.4	25.6	24.7	25.9	26.2	24.7	25.9	25.0	26.2	26.5		
	4H	25.1	26.3	25.5	26.6	26.8	25.4	26.6	25.8	26.9	27.2		
	6H	25.7	26.7	26.0	27.0	27.4	26.0	27.1	26.4	27.4	27.7		
	8H	25.9	26.9	26.2	27.2	27.5	26.2	27.2	26.6	27.6	27.9		
12H	12H	26.0	27.0	26.4	27.3	27.6	26.4	27.3	26.7	27.7	28.0		
	4H	ZH	23.2	24.3	23.5	24.6	24.9	23.4	24.5	23.7	24.8	25.1	
		3H	25.2	26.2	25.6	26.6	26.9	25.5	26.5	25.9	26.8	27.2	
		4H	26.1	27.0	26.5	27.3	27.7	26.4	27.3	26.8	27.6	28.0	
		6H	26.8	27.6	27.2	28.0	28.4	27.1	27.9	27.5	28.2	28.6	
8H		27.1	27.8	27.5	28.2	28.6	27.4	28.1	27.8	28.5	28.9		
12H	12H	27.2	27.9	27.7	28.3	28.7	27.6	28.2	28.0	28.6	29.1		
	8H	ZH	26.5	27.2	26.9	27.6	28.0	26.7	27.4	27.1	27.8	28.2	
		6H	27.3	27.9	27.8	28.3	28.8	27.6	28.2	28.0	28.6	29.0	
		8H	27.7	28.2	28.1	28.6	29.1	27.9	28.4	28.4	28.9	29.4	
		12H	27.9	28.4	28.4	28.8	29.3	28.2	28.7	28.7	29.1	29.6	
12H		ZH	26.5	27.1	27.0	27.6	28.0	26.7	27.4	27.2	27.8	28.2	
	6H	27.4	27.9	27.9	28.4	28.8	27.7	28.2	28.1	28.6	29.1		
	8H	27.8	28.2	28.3	28.7	29.2	28.1	28.5	28.6	29.0	29.5		
	Variation of the observer position for the luminaires distances S												
	S = 1.0H		+0.1 / -0.1					+0.1 / -0.1					
S = 1.5H		+0.2 / -0.3					+0.2 / -0.3						
S = 2.0H		+0.3 / -0.6					+0.3 / -0.6						
Standard table		BK06					BK06						
Correction		7.7					8.0						
Summand		7.7					8.0						
Corrected Glare Indices referring to 1500lm Total Luminous Flux													

INSTALLATION GUIDE




<https://youtu.be/KnedJbKp7oo>



MINIMAL TRACK 24V Profile 2m

A384-02-00- | N | WT |



MINIMAL TRACK 24V Rubber Cable n x 1m

A384-00-01- | N |


n = Total Length of System.

24V | Max. 4A | III

MINIMAL TRACK 24V Corner 90° 1 Plane

A384-00-02- | N | WT |


Cable Length = 35mm.



MINIMAL TRACK 24V Corner 90° 1 Plane Rounded

A384-00-03- | N | WT |


Cable Length = 35mm.



MINIMAL TRACK 24V Corner 90° 2 Planes

A384-00-04- | N | WT |

Cable Length = 100mm.




MINIMAL TRACK 24V End Cap

A384-00-05- | N | WT |






MINIMAL TRACK 24V Connection Box

A384-00-06- | N | WT |





					P	V	D [A x B x C]	
MINIMAL TRACK 24V Power Supply Box	ON/OFF	A384-00-07-	NT	WT	40W	24V	280 x 30 x 24mm	
		A384-00-08-	NT	WT	100W	24V	280 x 30 x 24mm	
220 240	V~	Included ON/OFF 24Vdc Power Supply.						
MINIMAL TRACK 24V Remote Power Supply	ON/OFF	0434-01-37				60W	24V	180 x 52 x 30mm
		0433-10-22				100W	24V	295 x 43 x 30mm
220 240	V~							
MINIMAL TRACK 24V Remote Constant Voltage Dimmer		0433-01-32	DALI / Push			24V	181 x 42 x 20mm	
		0433-01-35	CASAMBI			24V	72,6 x 30 x 18mm	
		0434-01-64	WIFI			24V	105 x 44 x 23mm	
24 V								



DROP VOLTAGE TABLE

		CABLE LENGTH (m)			
		<5	<10	<20	<30
POWER [W]	CABLE SECTION [mm²]	TRACK LENGTH (m)			
		30	30	30	30
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X

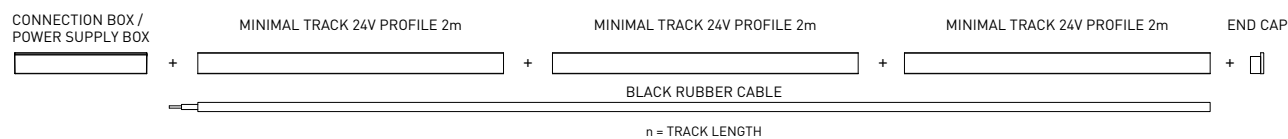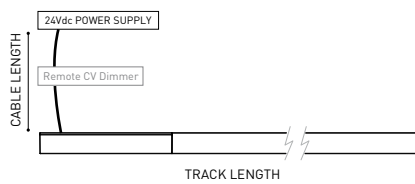

COLOUR | N ■ | NT ■ | WT □ |

DIM OPTIONS PLEASE CONSULT



Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com

INSTALLATION GUIDE
<https://youtu.be/KnedJbKp7oo>



MINIMAL TRACK SUSPENSION

ARKOSLIGHT



MINIMAL TRACK 24V Suspension

Profile 2m

A384-02-00- | N | WT |

Profile 2m Initial feed kit

A400-02-10- | N | WT |

Profile 2m Middle feed kit*



A400-02-20- | N | WT |

* Unidirectional Middle Feed.

MINIMAL TRACK 24V Suspension Corner 90°

A400-00-03- | N | WT |

Cable Length = 85mm.



MINIMAL TRACK 24V Suspension

Rubber Cable n x 1m

A400-00-01- | N |

n = Total Length of System.

MINIMAL TRACK 24V Suspension Straight Joiner

A400-00-02- | N | WT |

MINIMAL TRACK 24V Suspension Kit

A400-02-04- | N | WT |



Max distance between suspension kits = 100 cm.

MINIMAL TRACK 24V Suspension End Caps

A400-00-05- | N | WT |


Two End Caps Included.

24 V | Max. 4A





			P	V	D (A x B x C)
MINIMAL TRACK 24V Suspension Power Supply Box	ON/OFF	A400-00-06- NT WT	40W	24V	280 x 30 x 36mm
		A400-00-07- NT WT	100W	24V	280 x 30 x 36mm
220 240 V~ Included ON/OFF 24Vdc Power Supply.					
MINIMAL TRACK 24V Remote Power Supply	ON/OFF	0434-01-37	60W	24V	180 x 52 x 30mm
		0433-10-22	100W	24V	295 x 43 x 30mm
220 240 V~					
MINIMAL TRACK 24V Remote Constant Voltage Dimmer		0433-01-32	DALI / Push	24V	181 x 42 x 20mm
		0433-01-35	CASAMBI	24V	72,6 x 30 x 18mm
		0434-01-64	WIFI	24V	105 x 44 x 23mm

24V

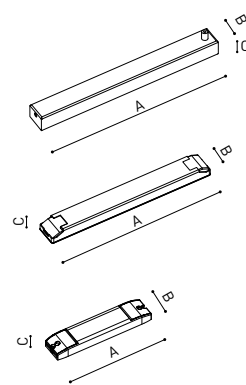

DROP VOLTAGE TABLE

		CABLE LENGTH (m)			
		<5	<10	<20	<30
POWER (W)	CABLE SECTION (mm²)	TRACK LENGTH (m)			
		<5	<10	<20	<30
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X

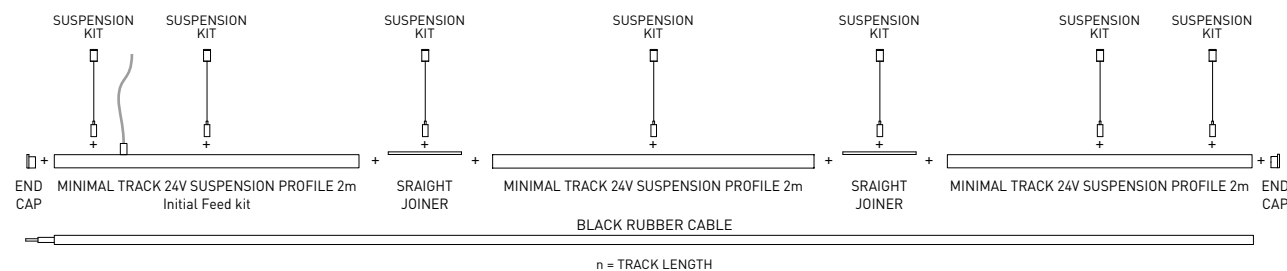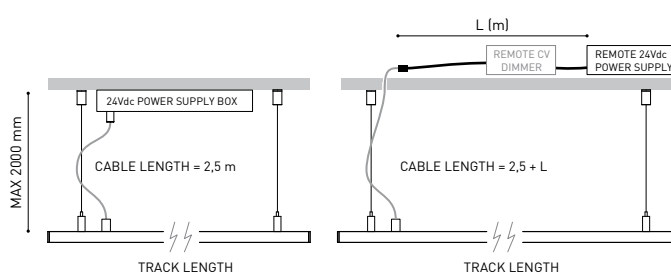

COLOUR | N ■ | NT ■ | WT □ |

DIM OPTIONS PLEASE CONSULT

Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com

5Year
GUARANTEE

WIRE TRIMLESS ACCESSORY


ARKOSLIGHT®

MINIMAL TRACK SUSPENSION



PRODUCT	
Model	Coaxial Trimless
Reference	A023-00-03- W N
Colour	W ☐ RAL 9016 N ☐ RAL 9005
Category	Accessories
Fasteners not available	
 REMOTE  INCL  Ø20	

DIMENSIONAL DRAWING



Wire Trimless Accessory is a collection of accessories for fitting tensioners and cables to Arkoslight luminaires suspended directly from the ceiling with any visible ceiling rose or fixings. This achieves a minimalist application with a visually tidy finish.

With Wire Trimless Accessory the items adjacent to the ceiling of the standard product (ceiling roses, fixings, driver boxes, etc.) are concealed by a simple recessed application.

Wire Trimless Accessory reduces the visual impact of the installation leading to extremely minimalist aesthetics. The wires come out of the ceiling material as a part of the structure. This detail creates a much purer, more essential layout, particular when several luminaires are fitted in an arrangement.



Fuente de luz (LED) reemplazable por un profesional autorizado

Replaceable (LED only) light source by an authorized professional.

Source lumineuse (LED) remplaçable par un professionnel agréé

Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato

Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado

Replaceable control gear by an authorized professional

Dispositif de commande remplaçable par un professionnel agréé

Alimentatore sostituibile da parte di un professionista autorizzato

Auswechselbares Betriebsgerät durch autorisierten Fachmann

INSTRUCCIONES PARA EL FINAL DE VIDA Y LA ELIMINACIÓN LOS COMPONENTES
INSTRUCTIONS ON END-OF-LIFE AND COMPONENT DISPOSAL
INSTRUCTIONS POUR LA GESTION DES COMPOSANTS EN FIN DE VIE ET LEUR MISE AU REBUT
ISTRUZIONI PER IL FINE VITA E LO SMALTIMENTO DEI COMPONENTI
ANWEISUNGEN ZUR ENTSORGUNG DER LEUCHTENKOMPONENTEN



Interrumpir la alimentación del aparato
Cut the power supply to the luminaire
Couper l'alimentation du luminaire
Interrompere l'alimentazione dell'apparecchio
Stromversorgung der Leuchte unterbrechen



Quitar la(s) fuente(s) de luz para el desecho
Remove light source(s) for disposal
Retirer la (les) source(s) lumineuse(s) pour l'élimination
Rimuovere la/le sorgente/e di luce per lo smaltimento
Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho
Remove the battery for decommissioning
Retirer la batterie pour sa mise au rebut
Rimuovere la batteria per la dismissione
Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho
Remove control gear for disposal
Retirer le dispositif de commande pour l'élimination
Rimuovere l'alimentatore per lo smaltimento
Betriebsgerät zur Entsorgung ausbauen

Enviar los materiales a un centro de recogida RAEE
Send the materials to a WEEE collection centre
Envoyer les matériaux dans une déchetterie DEEE
Inviare i materiali ad un centro di raccolta RAEE
Die Materialien in einem WEEE-Zentrum entsorgen

