Black Foster Micro 48V

ARKOSLIGHT

DIMENSIONI

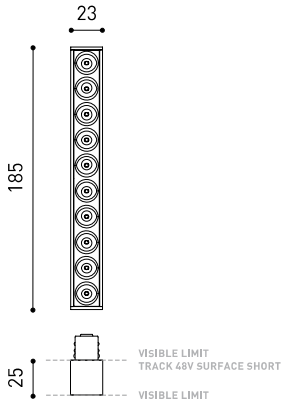

ACCESSORI

TRACK 48V OPTIONS

	PRODOTTO
Nome	BLACK FOSTER MICRO 48V 10 DIM DALI 3500K N
Articolo	A4165023N
Colore	Nero
RAL	9005
Categoria	TRACK LIGHTS

	SORGENTE DI LUCE
Tipo	LED
Flusso luminoso lordo	1650 lm
Temperatura di colore	3500 K
Stabilità cromatica	MacAdam Step 3
Indice di Riproduzione Cromatica	CRI>90
Potenza	14 W
Efficienza	118 lm/W
Ore di vita del LED	L90B10 >60.000h

	**APPARECCHIO	DATI FOTOMETRICI**
Efficienza luminosa	87%
Angolo del fascio di luce	37°

	**APPARECCHIO	DATI ELETTRICI**
Valori di potenza del sistema	15,47 W
Tensione	48Vdc
Regolazione	DALI
Classe di isolamento elettrico	

	ALTRI DATI
Tenuta stagna	IP20
Wireless control	Consultare
Tipo de carril	Track 48V
Peso	140 g
Peso compresso l'imballaggio	163 g
Dimensioni dell'imballaggio	220 x 48 x 49 mm
Unità per imballaggio	1
Materiali	Alluminio / Acrilonitrile Butadiene Stirene / Policarbonato

CE

Black Foster Micro per Track 48V, il downlight più compatto ad effetto "The Invisible Black". Questo apparecchio di illuminazione lineare possiede un eccellente controllo del fascio, i cui raggi non lo bagnano, ma si incanalano direttamente verso l'esterno, senza toccare lo schermo. Il suo ridotto design, inoltre, consente di inserire i moduli nei sistemi con un'integrazione assoluta.

Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com

5 Year GUARANTEE*

DIAGRAMMA DI ABBAGLIAMENTO POLARE

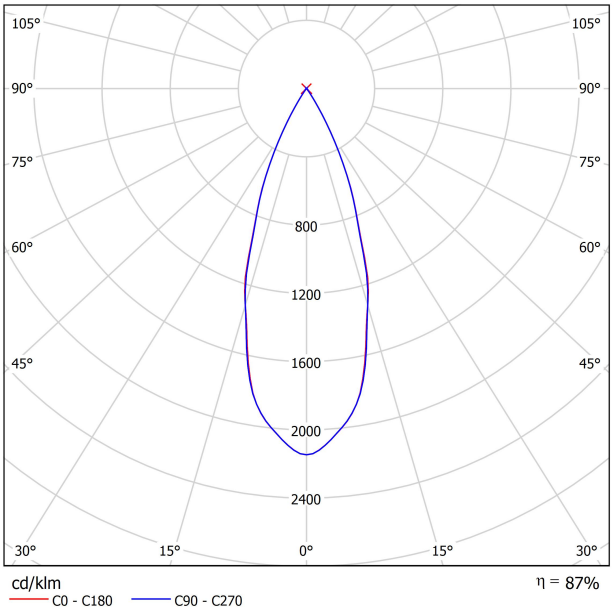

DIAGRAMMA CONICO

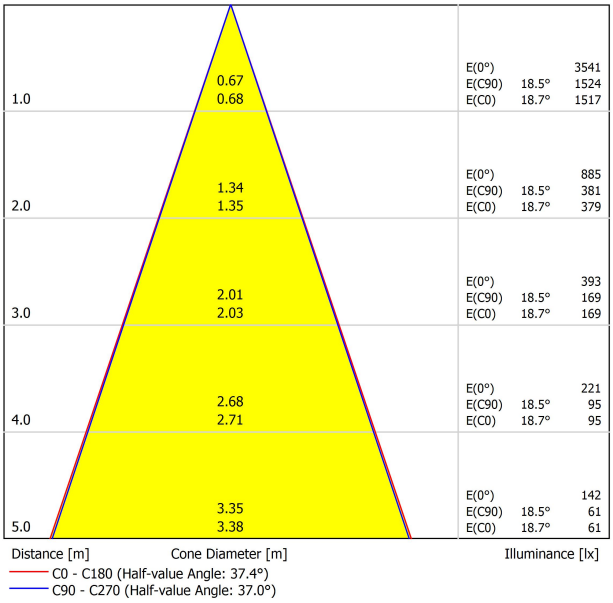

UGR

Glare Evaluation According to UGR

ρ Ceiling		70	70	50	50	30	70	70	50	50	30
ρ Walls		50	30	50	30	30	50	30	50	30	30
ρ Floor		20	20	20	20	20	20	20	20	20	20
Room Size X	Y	Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	1.1	1.7	1.3	1.9	2.1	0.8	1.4	1.0	1.6	1.8
	3H	4.4	5.0	4.7	5.2	5.4	4.2	4.7	4.4	5.0	5.2
	4H	6.2	6.8	6.5	7.0	7.3	6.0	6.6	6.3	6.8	7.1
	6H	8.1	8.7	8.5	8.9	9.2	8.1	8.6	8.4	8.9	9.2
	8H	9.4	9.9	9.7	10.1	10.4	9.3	9.7	9.6	10.0	10.3
	12H	10.7	11.2	11.1	11.5	11.8	10.7	11.1	11.0	11.4	11.7
4H	2H	2.1	2.6	2.4	2.9	3.1	1.8	2.4	2.1	2.6	2.9
	3H	5.5	6.0	5.9	6.3	6.6	5.4	5.9	5.8	6.2	6.5
	4H	7.6	8.0	7.9	8.3	8.6	7.4	7.8	7.8	8.1	8.4
	6H	9.7	10.1	10.1	10.4	10.8	9.7	10.0	10.1	10.4	10.8
	8H	11.1	11.4	11.5	11.7	12.1	11.0	11.3	11.4	11.6	12.0
	12H	12.6	12.8	13.0	13.2	13.6	12.5	12.8	12.9	13.2	13.6
8H	4H	8.4	8.7	8.8	9.1	9.5	8.2	8.5	8.7	8.9	9.3
	6H	10.8	11.0	11.3	11.5	11.9	10.8	11.0	11.3	11.5	11.9
	8H	12.3	12.5	12.8	12.9	13.4	12.3	12.4	12.7	12.9	13.3
	12H	14.1	14.2	14.5	14.7	15.2	14.0	14.2	14.5	14.6	15.1
12H	4H	8.6	8.9	9.1	9.3	9.7	8.5	8.7	8.9	9.1	9.6
	6H	11.2	11.3	11.6	11.8	12.3	11.2	11.3	11.6	11.8	12.3
	8H	12.8	12.9	13.3	13.4	13.9	12.7	12.9	13.2	13.3	13.8
Variation of the observer position for the luminaire distances S											
S = 1.0H		+3.5 / -1.3					+3.6 / -1.3				
S = 1.5H		+6.0 / -1.6					+6.0 / -1.6				
S = 2.0H		+8.0 / -1.7					+8.0 / -1.9				
Standard table		---					---				
Correction Summand		---					---				
Corrected Glare Indices referring to 1650lm Total Luminous Flux											



TRACK 48V TRIMLESS

TRACK 48V TRIMLESS 1m	A338-01-00-	N	WT
TRACK 48V TRIMLESS 2m	A338-02-00-	N	WT
TRACK 48V TRIMLESS 3m	A338-03-00-	N	WT
TRACK 48V TRIMLESS Corner 90º One Plane	A338-06-00-	N	WT
TRACK 48V TRIMLESS Corner 90º Two Planes	A338-07-00-	N	WT

PLASTERBOARD CEILING, MANDATORY THICKNESS 12,5mm.
RECOMMENDED FOR INSTALLATIONS WHERE THE PROFILE CAN BE INSTALLED BEFORE THE FALSE PLASTERBOARD CEILING.

TRIMLESS INSTALLATION GUIDE
https://youtu.be/tgGsQdaYe-w

TRACK 48V TRIMLESS
Corner 90º One Plane



*Electrical connection not included

TRACK 48V TRIMLESS
Corner 90º Two Planes



*Electrical connection not included

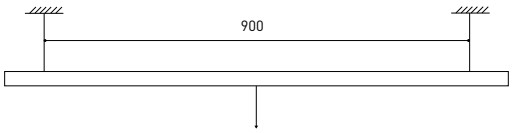



TRACK 48V SURFACE

TRACK 48V SURFACE 1m	A338-11-00-	NT	WT
TRACK 48V SURFACE 2m	A338-12-00-	NT	WT
TRACK 48V SURFACE 3m	A338-13-00-	NT	WT
TRACK 48V SURFACE Corner 90º One Plane	A338-14-00-	NT	WT
TRACK 48V SURFACE T-Joint	A338-15-00-	NT	
TRACK 48V SURFACE X-Joint	A338-16-00-	NT	

TRACK 48V SURFACE

Corner 90º One Plane	T-Joint	X-Joint
		

Electrical connection not included | Straight joiner included



TRACK 48V SURFACE SHORT

TRACK 48V SURFACE SHORT 1m	A338-21-00-	NT	WT
TRACK 48V SURFACE SHORT 2m	A338-22-00-	NT	WT
TRACK 48V SURFACE SHORT 3m	A338-23-00-	NT	WT
TRACK 48V SURFACE SHORT Corner 90º One Plane	A338-24-00-	NT	WT
TRACK 48V SURFACE SHORT T-Joint	A338-25-00-	NT	
TRACK 48V SURFACE SHORT X-Joint	A338-26-00-	NT	

TRACK 48V SURFACE SHORT

Corner 90º One Plane	T-Joint	X-Joint
		

Electrical connection not included | Straight joiner included

COLOUR | N ■ RAL 9005 | NT ■ RAL 9005 | WT □ RAL 9016 |

Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com

5 Year GUARANTEE

CONSTANT VOLTAGE LED POWER SUPPLY

	P	V	D (A x B x C)
0434-01-61* | **N** | **W** |	100W	48V	298 x 19 x 16mm
0434-01-69* | **N** | **W** |	250W	48V	268 x 22 x 44mm
0434-01-62	150W	48V	350 x 30 x 18mm
0434-01-80	250W	48V	400 x 40 x 22mm

220 240 V~ | *To be installed inside the track.

» 282

DROP VOLTAGE TABLE

		CABLE LENGTH (m)			
		5	10	20	30
POWER (W)	**CABLE SECTION** (mm^2)	**TRACK LENGTH** (m)			
100	0,75	50	50	X	X
	1,5	50	50	40	25
150	0,75	40	15	X	X
	1,5	50	40	20	X
250	0,75	20	X	X	X
	1,5	35	20	X	X

LED POWER SUPPLY
0434-01-61



LED POWER SUPPLY
0434-01-69 **



LED POWER SUPPLY
0434-01-62



LED POWER SUPPLY
0434-01-80



**Not recommended for Track 48V Surface Short

Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com

5 Year GUARANTEE

ALL 48V TRACK



Live-End Connector 48V

A338-00-01- | N | W |



Central Connector 48V

A338-00-02- | N | W |



L-Joint Connector 48V

A338-00-12- | N | W |



Corner 90º Connector One Plane 48V

A338-00-24- | N | W |

*Not suitable for trimless version



T-Joint Connector 48V

A450-00-07- | N |



X-Joint Connector 48V

A450-00-08- | N |



Wireless Control 48V

0434-01-31- | N | W | Casambi/AAG Stucchi App



Cover Gap 1m 48V

A338-00-30- | N | W |

TRIMLESS 48V

Trimless T-Bracket 48V

A338-00-03

Trimless Clamp for M6 ROD 48V

A338-00-09

*See accessories quantities



Trimless Long T-Bracket 48V

A338-00-04

Trimless Track Clamp 48V

A338-00-10

*See accessories quantities



Trimless Straight Joiner 48V (2 Units)

A338-00-05- | N | WT |



Trimless Suspension Kit 48V

A338-00-08

*See accessories quantities



Trimless Plaster Installation Guard 1m 48V

A338-00-21

*** SUGGESTED MOUNTING ACCESSORIES QUANTITIES**

1000mm - 2 Pcs.
2000mm - 3 Pcs.
3000mm - 4 Pcs.

COLOUR | **N** ■ RAL 9005 | **W** □ RAL 9016 | **NT** ■ RAL 9005 | **WT** □ RAL 9016 |

Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com

5 Year GUARANTEE

TRIMLESS, SURFACE & SUSPENSION 48V

End 48V

A338-00-06- | NT | WT |

End feed 48V

A338-00-07- | NT | WT |

SURFACE & SUSPENSION SHORT 48V

Short End 48V

A338-00-18- | NT | WT |

Short End feed 48V

A338-00-19- | NT | WT |

SURFACE & SURFACE SHORT 48V



Power Supply Case 48V

A338-00-29- | NT | WT | 150 W

220 240 V ~ INCL

To be installed aside 48V Surface Tracks

SURFACE, SUSPENSION , SURFACE SHORT & SUSPENSION SHORT 48V



Surface Straight Joiner 48V

A338-00-11

SUSPENSION & SUSPENSION SHORT 48V



Wired Power Supply Case 48V

A338-00-25- | NT | WT | 150 W NO DIM

A338-00-26- | NT | WT | 150 W DIM

220 240 V ~ INCL



Suspension Kit 48V (2 units)

A338-00-15- | NT | WT |



Suspension Feed Kit 48V

A338-00-16- | N | W | NO DIM

A338-00-17- | N | W | DIM

For remote power supply

A338-00-27- | N | W | NO DIM

A338-00-28- | N | W | DIM

For power supply inside the track

WIRE TRIMLESS ACCESSORIES



FEED

MAINS TRIMLESS* NO DIM

A023-00-01- | W | N |

MAINS THICK TRIMLESS* DIM

A023-00-02- | W | N |

REMOTE INCL Ø20



FASTENING

STEEL CABLE TRIMLESS*

A023-00-05- | W | N |

INCL Ø20

MAINS TRIMLESS



MAINS THICK TRIMLESS

STEEL CABLE TRIMLESS

* AS MANY PIECES AS NEEDED ACCORDING TO YOUR PRODUCT

COLOUR | N ■ RAL 9005 | W □ RAL 9016 | NT ■ RAL 9005 | WT □ RAL 9016 |

Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com

5 Year GUARANTEE

ECODESIGN AND ENERGY LABELLING

ARKOSLIGHT®



Fuente de luz (LED) reemplazable por un profesional autorizado

Replaceable (LED only) light source by an authorized professional.

Source lumineuse (LED) remplaçable par un professionnel agréé

Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato

Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann

Equipo de control reemplazable por un profesional autorizado

Replaceable control gear by an authorized professional

Dispositif de commande remplaçable par un professionnel agréé

Alimentatore sostituibile da parte di un professionista autorizzato

Auswechselbares Betriebsgerät durch autorisierten Fachmann

INSTRUCCIONES PARA EL FINAL DE VIDA Y LA ELIMINACIÓN LOS COMPONENTES
INSTRUCTIONS ON END-OF-LIFE AND COMPONENT DISPOSAL
INSTRUCTIONS POUR LA GESTION DES COMPOSANTS EN FIN DE VIE ET LEUR MISE AU REBUT
ISTRUZIONI PER IL FINE VITA E LO SMALTIMENTO DEI COMPONENTI
ANWEISUNGEN ZUR ENTSORGUNG DER LEUCHTENKOMPONENTEN

Interrumpir la alimentación del aparato
Cut the power supply to the luminaire
Couper l'alimentation du luminaire
Interrompere l'alimentazione dell'apparecchio
Stromversorgung der Leuchte unterbrechen



Quitar la(s) fuente(s) de luz para el desecho
Remove light source(s) for disposal
Retirer la (les) source(s) lumineuse(s) pour l'élimination
Rimuovere la/le sorgente/e di luce per lo smaltimento
Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho
Remove the battery for decommissioning
Retirer la batterie pour sa mise au rebut
Rimuovere la batteria per la dismissione
Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho
Remove control gear for disposal
Retirer le dispositif de commande pour l'élimination
Rimuovere l'alimentatore per lo smaltimento
Betriebsgerät zur Entsorgung ausbauen

Enviar los materiales a un centro de recogida RAEE
Send the materials to a WEEE collection centre
Envoyer les matériaux dans une déchetterie DEEE
Inviare i materiali ad un centro di raccolta RAEE
Die Materialien in einem WEEE-Zentrum entsorgen



Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com

5Year GUARANTEE