




## DIMENSIONS

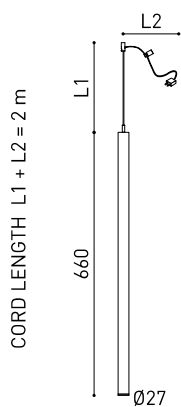

## ACCESSORIES

FANCY SHAPE BASE  
(MANDATORY)

CORD ACCESSORY

## PRODUCT

|           |                                                |
|-----------|------------------------------------------------|
| Name      | STICK 66 FANCY SHAPE 2M 46° 2700K NT           |
| Reference | A4240030NT                                     |
| Color     | Textured black - Other colours, please consult |
| RAL       | 9005                                           |
| Category  | CUSTOM SYSTEMS                                 |

## LIGHT SOURCE

|                        |                                  |
|------------------------|----------------------------------|
| Type                   | LED                              |
| Gross luminous flux    | 530 lm                           |
| Colour temperature     | 2700 K - Other K, please consult |
| Chromatic stability    | MacAdam Step 2                   |
| Colour Rendering Index | CRI > 90                         |
| Power                  | 5,6 W                            |
| Current                | 500 mA                           |
| Efficacy               | 95 lm/W                          |
| LED lifespan           | L90B10 > 108.000h                |

## LIGHTING FIXTURE | PHOTOMETRIC DATA

|                     |     |
|---------------------|-----|
| Lighting efficiency | 84% |
| Light beam angle    | 42° |

## LIGHTING FIXTURE | ELECTRICAL DATA

|                             |                                           |
|-----------------------------|-------------------------------------------|
| Driver                      | Excluded                                  |
| Power values of the system  | 5,6 W                                     |
| Dimming                     | No Dim / DALI - Other DIM, please consult |
| Electrical insulation class | III                                       |

## OTHER DATA

|                           |                                                             |
|---------------------------|-------------------------------------------------------------|
| Sealing                   | IP20                                                        |
| Wireless control          | Please Consult                                              |
| Cord length               | Max. 2 m                                                    |
| Fast adjustment tensioner | Yes                                                         |
| Weight                    | 500 g                                                       |
| Packaged weight           | 720 g                                                       |
| Packaging dimensions      | 740 x 135 x 78 mm                                           |
| Units per package         | 1                                                           |
| Materials                 | Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate |




Stick is a light fitting, designed for accent lighting, which underlines the verticality of the space where it is applied. Fancy Shape is a system that enables architects to configure and distribute the space's lighting with complete freedom, creating patterns and designs using a single light source with a surface-mounted base.

POLAR DIAGRAM



CONICAL DIAGRAM

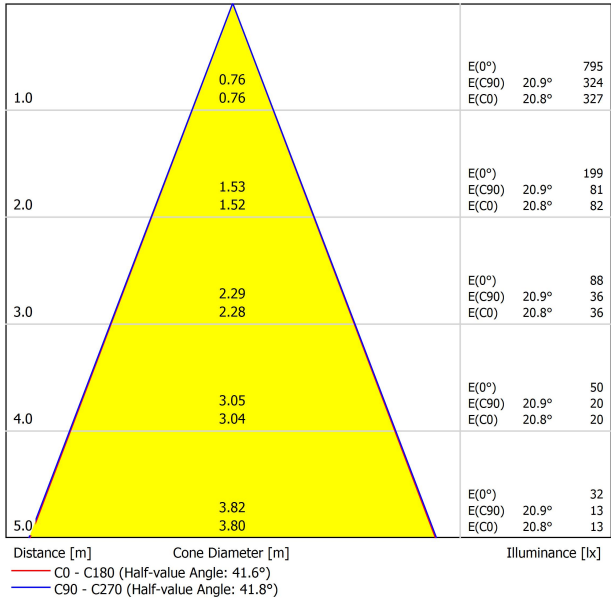

# FANCY SHAPE BASE

ARKOSLIGHT®

MANDATORY FOR INSTALLATION



## FANCY SHAPE BASES

n° Lamps

|                    |        |        |        |            |    |    |
|--------------------|--------|--------|--------|------------|----|----|
| FANCY SHAPE BASE 2 | 500 mA | 1 to 2 | ON/OFF | A417-01-11 | WT | NT |
|                    |        |        | DALI   | A417-01-12 | WT | NT |

2 Equidistant Fixing Points



|                    |        |        |        |            |    |    |
|--------------------|--------|--------|--------|------------|----|----|
| FANCY SHAPE BASE 5 | 500 mA | 3 to 5 | ON/OFF | A417-01-21 | WT | NT |
| FANCY SHAPE BASE 6 | 500 mA | 3 to 6 | DALI   | A417-01-32 | WT | NT |

6 Equidistant Fixing Points



|                     |        |         |        |            |    |    |
|---------------------|--------|---------|--------|------------|----|----|
| FANCY SHAPE BASE 10 | 500 mA | 6 to 10 | ON/OFF | A417-01-41 | WT | NT |
| FANCY SHAPE BASE 12 | 500 mA | 7 to 12 | DALI   | A417-01-52 | WT | NT |


12 Equidistant Fixing Points




220  
240 V~




INCL

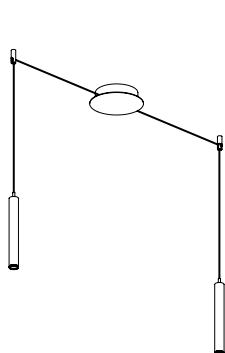

Fancy Shape BASE  
2 LAMPS

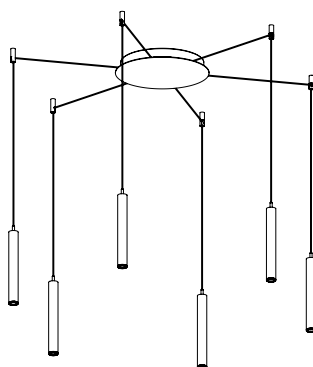

Fancy Shape BASE  
6 LAMPS

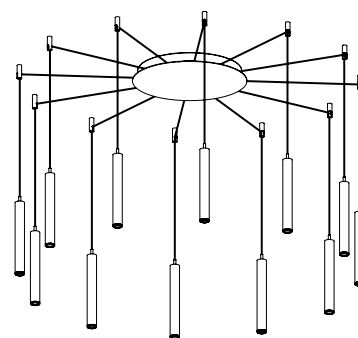

Fancy Shape BASE  
12 LAMPS



NT



WT

## ATTENTION

**Fancy Shape Base NT:** Base and Cap in Black.

**Fancy Shape Base WT:** Black Base and White Cap.

**Luminaire Cable:** Black in all finishes.

Calle N · Pol. Ind. EL OLIVERAL  
46394 Ribarroja del Turia · Valencia (Spain)  
Tel. +34 961 667 207 · Fax +34 961 667 054  
info@arkoslight.com · www.arkoslight.com





| PRODUCT   |                |
|-----------|----------------|
| Model     | Cord Accessory |
| Reference | 02230000N      |
| Colour    | N ■ RAL9005    |
| Category  | Accessories    |

Included 1 unit x lamp

#### DIMENSIONAL DRAWING





| PRODUCT   |                          |
|-----------|--------------------------|
| Model     | Cord Accessory One Plane |
| Reference | 02240000N                |
| Colour    | N ■ RAL9005              |
| Category  | Accessories              |

## DIMENSIONAL DRAWING





Fuente de luz (LED) reemplazable por un profesional autorizado

Replaceable (LED only) light source by an authorized professional.

Source lumineuse (LED) remplaçable par un professionnel agréé

Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato

Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado

Replaceable control gear by an authorized professional

Dispositif de commande remplaçable par un professionnel agréé

Alimentatore sostituibile da parte di un professionista autorizzato

Auswechselbares Betriebsgerät durch autorisierten Fachmann

INSTRUCCIONES PARA EL FINAL DE VIDA Y LA ELIMINACIÓN LOS COMPONENTES  
INSTRUCTIONS ON END-OF-LIFE AND COMPONENT DISPOSAL  
INSTRUCTIONS POUR LA GESTION DES COMPOSANTS EN FIN DE VIE ET LEUR MISE AU REBUT  
ISTRUZIONI PER IL FINE VITA E LO SMALTIMENTO DEI COMPONENTI  
ANWEISUNGEN ZUR ENTSORGUNG DER LEUCHTENKOMPONENTEN



Interrumpir la alimentación del aparato  
Cut the power supply to the luminaire  
Couper l'alimentation du luminaire  
Interrompere l'alimentazione dell'apparecchio  
Stromversorgung der Leuchte unterbrechen



Quitar la(s) fuente(s) de luz para el desecho  
Remove light source(s) for disposal  
Retirer la (les) source(s) lumineuse(s) pour l'élimination  
Rimuovere la/le sorgente/e di luce per lo smaltimento  
Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho  
Remove the battery for decommissioning  
Retirer la batterie pour sa mise au rebut  
Rimuovere la batteria per la dismissione  
Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho  
Remove control gear for disposal  
Retirer le dispositif de commande pour l'élimination  
Rimuovere l'alimentatore per lo smaltimento  
Betriebsgerät zur Entsorgung ausbauen

Enviar los materiales a un centro de recogida RAEE  
Send the materials to a WEEE collection centre  
Envoyer les matériaux dans une déchetterie DEEE  
Inviare i materiali ad un centro di raccolta RAEE  
Die Materialien in einem WEEE-Zentrum entsorgen

