




Dimensions



Accessories



CUSTOM ACCESSORIES
(MANDATORY)

Name	FIFTY+ HQ SURFACE CUSTOM 150 DIM DALI 4000K NT
Reference	A4431222NT
Colour	Textured black
RAL	9005
Category	CUSTOM SYSTEMS

Type	LED
Gross luminous flux	5160 lm
Colour temperature	4000 K
Chromatic stability	MacAdam Step 2
Colour Rendering Index	CRI>90
Power	35,4 W
Current	1050 mA
Efficacy	142 lm/W
LED lifespan	L80B10 >60.000h
Energy efficiency class	D

Lighting efficiency	70% / UGR 47%
Light beam angle	104° / UGR 62°

Driver	Included - Fast Connect
Power values of the system	39,38 W
Frequency	50/60 Hz
Dimming	DALI
Electrical insulation class	⚡


Sealing	IP20
Wireless control	Please Consult
Diffuser included	No
Weight	4270 g
Packaged weight	6470 g
Packaging dimensions	Ø157,5 x 2140 mm
Units per package	1
Materials	Aluminium / Polycarbonate

OTHER DATA




Fifty+ is the longitudinal lighting profile for Custom application. Fifty + adds functional light and visual support to highlight the lines, volumes and transitions defined in the architecture. Having an Opal diffuser which disperses the light and a UGR diffuser that reduces the glare angle. Both are installed as a single part along its entire length so as not to interrupt the light beam.

Polar diagram

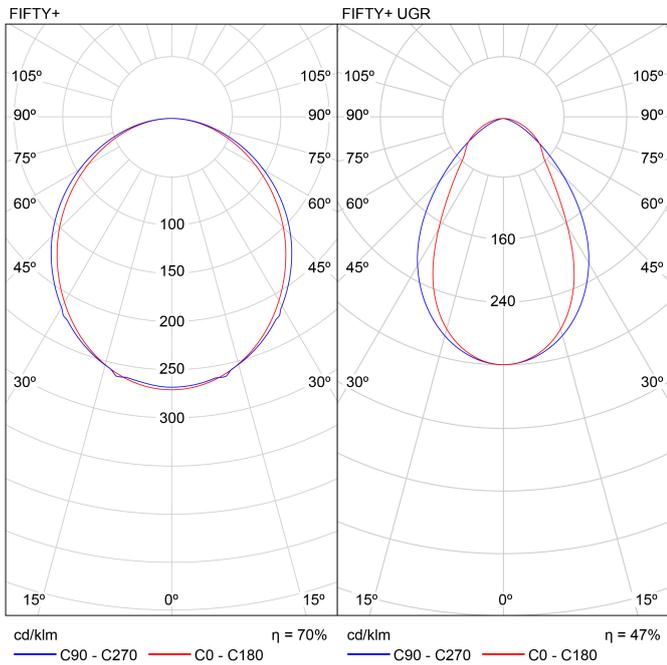

Conical diagram

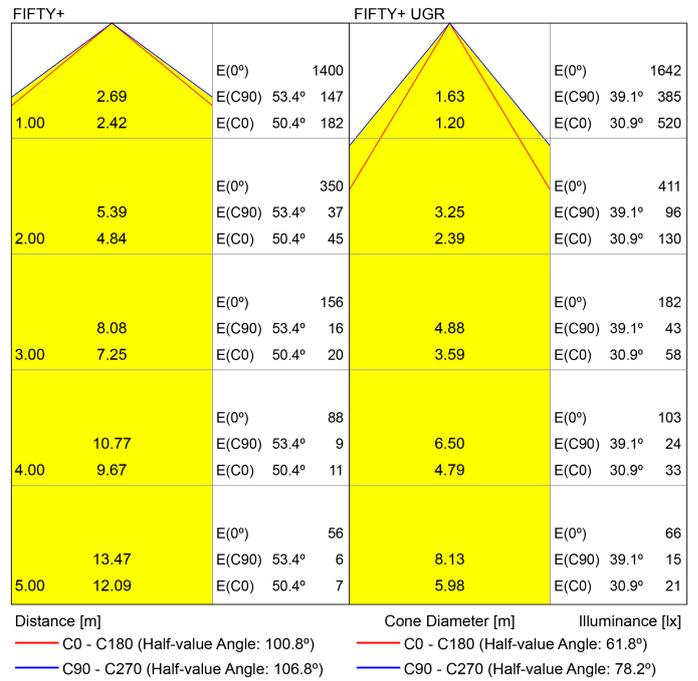

UGR

Glare Evaluation According to UGR												
Room Size		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
X	Y	2H	3H	4H	6H	8H	12H	2H	3H	4H	6H	8H
2H	2H	21.3	22.6	21.6	22.9	23.1	21.7	23.0	22.0	23.2	23.5	23.1
3H	2H	23.0	24.2	23.3	24.4	24.7	23.4	24.6	23.8	24.9	25.1	25.1
4H	2H	23.6	24.7	23.9	25.0	25.3	24.1	25.2	24.4	25.5	25.8	25.8
6H	2H	24.0	25.1	24.4	25.4	25.7	24.6	25.6	24.9	25.9	26.2	26.2
8H	2H	24.2	25.2	24.5	25.5	25.8	24.7	25.7	25.1	26.0	26.3	26.3
12H	2H	24.2	25.2	24.6	25.5	25.8	24.8	25.8	25.2	26.1	26.4	26.4
2H	3H	21.9	23.0	22.3	23.3	23.6	22.2	23.3	22.5	23.6	23.9	23.9
3H	3H	23.8	24.7	24.2	25.1	25.4	24.2	25.1	24.5	25.4	25.8	25.8
4H	3H	24.5	25.4	24.9	25.7	26.1	25.0	25.8	25.3	26.1	26.5	26.5
6H	3H	25.1	25.8	25.5	26.2	26.6	25.6	26.3	26.0	26.7	27.1	27.1
8H	3H	25.3	25.9	25.7	26.3	26.8	25.8	26.4	26.2	26.8	27.3	27.3
12H	3H	25.4	26.0	25.8	26.4	26.8	25.9	26.5	26.4	26.9	27.4	27.4
2H	4H	24.8	25.5	25.3	25.9	26.3	25.2	25.9	25.6	26.3	26.7	26.7
3H	4H	25.5	26.1	26.0	26.5	27.0	25.9	26.5	26.4	26.9	27.4	27.4
4H	4H	25.8	26.3	26.3	26.7	27.2	26.2	26.7	26.7	27.2	27.6	27.6
6H	4H	26.0	26.4	26.4	26.8	27.3	26.5	26.9	27.0	27.3	27.8	27.8
8H	4H	24.9	25.5	25.3	25.9	26.3	25.2	25.8	25.7	26.2	26.7	26.7
12H	4H	25.6	26.1	26.1	26.5	27.0	26.0	26.5	26.5	26.9	27.4	27.4
2H	6H	25.9	26.3	26.4	26.8	27.3	26.3	26.7	26.8	27.2	27.7	27.7

Variation of the observer position for the luminare distances S

S = 1.0H	+0.1 / -0.1	+0.1 / -0.1
S = 1.5H	+0.2 / -0.4	+0.2 / -0.4
S = 2.0H	+0.4 / -0.8	+0.4 / -0.7

Standard table BK05 BK06

Correction Summand 1.4 2.3

Corrected Glare Indices referring to S160lm Total Luminous Flux

UGR

Glare Evaluation According to UGR												
Room Size		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
X	Y	2H	3H	4H	6H	8H	2H	3H	4H	6H	8H	2H
2H	2H	16.8	17.9	17.1	18.1	18.3	16.3	17.3	16.6	17.5	17.7	17.7
3H	2H	18.5	19.5	18.8	19.7	20.0	17.4	18.3	17.7	18.5	18.8	18.8
4H	2H	19.1	20.0	19.4	20.2	20.5	17.7	18.6	18.1	18.9	19.2	19.2
6H	2H	19.5	20.3	19.8	20.6	20.9	18.0	18.8	18.3	19.1	19.4	19.4
8H	2H	19.6	20.4	20.0	20.7	21.0	18.1	18.9	18.4	19.2	19.5	19.5
12H	2H	19.7	20.4	20.0	20.7	21.0	18.1	18.9	18.5	19.2	19.5	19.5
2H	3H	17.1	18.0	17.5	18.3	18.5	16.7	17.5	17.0	17.8	18.1	18.1
3H	3H	19.0	19.7	19.4	20.1	20.4	18.0	18.7	18.3	19.0	19.3	19.3
4H	3H	19.7	20.4	20.1	20.7	21.1	18.5	19.1	18.9	19.5	19.8	19.8
6H	3H	20.2	20.8	20.6	21.2	21.6	18.9	19.4	19.3	19.8	20.2	20.2
8H	3H	20.4	20.9	20.8	21.3	21.7	19.0	19.5	19.4	19.9	20.3	20.3
12H	3H	20.5	21.0	20.9	21.4	21.8	19.1	19.5	19.5	19.9	20.4	20.4
2H	4H	19.8	20.4	20.3	20.7	21.2	18.7	19.2	19.1	19.6	20.0	20.0
3H	4H	20.5	20.9	20.9	21.3	21.8	19.2	19.6	19.7	20.0	20.5	20.5
4H	4H	20.7	21.1	21.2	21.5	22.0	19.4	19.8	19.9	20.2	20.7	20.7
6H	4H	20.8	21.1	21.3	21.6	22.1	19.5	19.8	20.0	20.3	20.8	20.8
8H	4H	19.8	20.3	20.3	20.7	21.1	18.7	19.2	19.2	19.6	20.0	20.0
12H	4H	20.5	20.8	21.0	21.3	21.8	19.3	19.6	19.7	20.1	20.5	20.5
2H	6H	20.7	21.0	21.2	21.5	22.0	19.5	19.8	20.0	20.2	20.7	20.7

Variation of the observer position for the luminare distances S

S = 1.0H	+0.3 / -0.3	+0.3 / -0.5
S = 1.5H	+0.5 / -0.4	+1.2 / -1.2
S = 2.0H	+0.9 / -0.9	+2.3 / -1.8

Standard table BK03

Correction Summand -4.6 -6.1

Corrected Glare Indices referring to S160lm Total Luminous Flux

MANDATORY FOR INSTALLATION

FIFTY +Diffuser (x meter)	LOR
A447-00-00	70%

Max length 30 m.



FIFTY +UGR Diffuser (x meter)*	LOR
A447-00-10	47%

Max length 30 m.



FIFTY +End Caps Kit
A447-00-20- WT NT





FIFTY +Straight Joiner
A447-00-30



FIFTY +Power Line
A443-00-00



Connection diagram:

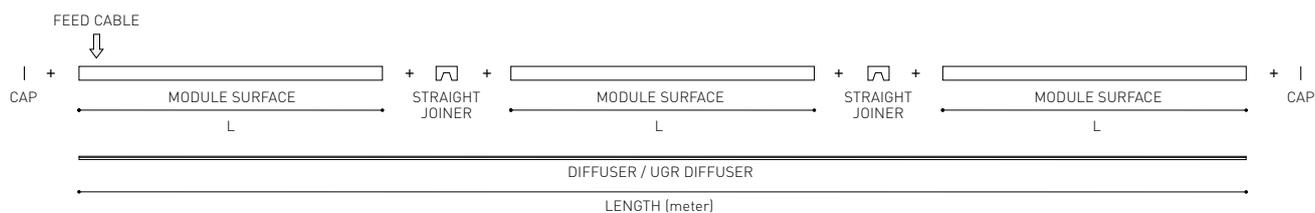

PRODUCT CONFIGURATOR

Use our online configurator to design your own custom product layout. The tool will guide you through the process and automatically calculate the required drivers and accessories.

[Start your configuration →](#)

COLOUR | WT | NT | MATERIAL | AL | PC |



Fuente de luz (LED) reemplazable por un profesional autorizado

Replaceable (LED only) light source by an authorized professional.

Source lumineuse (LED) remplaçable par un professionnel agréé

Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato

Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado

Replaceable control gear by an authorized professional

Dispositif de commande remplaçable par un professionnel agréé

Alimentatore sostituibile da parte di un professionista autorizzato

Auswechselbares Betriebsgerät durch autorisierten Fachmann

Instrucciones para el final de vida y la eliminación de los componentes:

Instructions on end-of-life and component disposal:

Instructions pour la gestion des composants en fin de vie et leur mise au rebut :

Istruzioni per il fine vita e lo smaltimento dei componenti:

Anweisungen zur entsorgung der Leuchtenkomponenten:




Interrumpir la alimentación del aparato
Cut the power supply to the luminaire
Couper l'alimentation du luminaire
Interrompere l'alimentazione dell'apparecchio
Stromversorgung der Leuchte unterbrechen



Quitar la(s) fuente(s) de luz para el desecho
Remove light source(s) for disposal
Retirer la (les) source(s) lumineuse(s) pour l'élimination
Rimuovere la/le sorgente/e di luce per lo smaltimento
Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho
Remove the battery for decommissioning
Retirer la batterie pour sa mise au rebut
Rimuovere la batteria per la dismissione
Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho
Remove control gear for disposal
Retirer le dispositif de commande pour l'élimination
Rimuovere l'alimentatore per lo smaltimento
Betriebsgerät zur Entsorgung ausbauen



Enviar los materiales a un centro de recogida RAEE
Send the materials to a WEEE collection centre
Envoyer les matériaux dans une déchetterie DEEE
Inviare i materiali ad un centro di raccolta RAEE
Die Materialien in einem WEEE-Zentrum entsorgen

