




## Dimensions



## Accessories



CUSTOM ACCESSORIES  
(MANDATORY)

Name	FIFTY+ HQ SURFACE CUSTOM CORNER 3000K WT
Reference	A4431511WT
Colour	Textured white
RAL	9016
Category	CUSTOM SYSTEMS

Type	LED
Gross luminous flux	3260 lm
Colour temperature	3000 K
Chromatic stability	MacAdam Step 2
Colour Rendering Index	CRI>90
Power	23,6 W
Current	1050 mA
Efficacy	135 lm/W
LED lifespan	L80B10 >60.000h
Energy efficiency class	D

Lighting efficiency	70% / UGR 47%
Light beam angle	104° / UGR 62°

Driver	Included - Fast Connect
Power values of the system	28,71 W
Frequency	50/60 Hz
Dimming	No Dim
Electrical insulation class	⚡

Sealing	IP20
Wireless control	Please Consult
Diffuser included	No
Weight	2860 g
Packaged weight	3780 g
Packaging dimensions	704 x 629 x 100 mm
Units per package	1
Materials	Aluminium / Polycarbonate

## PRODUCT

## LIGHT SOURCE

## LIGHTING FIXTURE | PHOTOMETRIC DATA


## LIGHTING FIXTURE | ELECTRICAL DATA

## OTHER DATA




Fifty+ is the longitudinal lighting profile for Custom application. Fifty+ adds functional light and visual support to highlight the lines, volumes and transitions defined in the architecture. Having an Opal diffuser which disperses the light and a UGR diffuser that reduces the glare angle. Both are installed as a single part along its entire length so as not to interrupt the light beam.

## Polar diagram

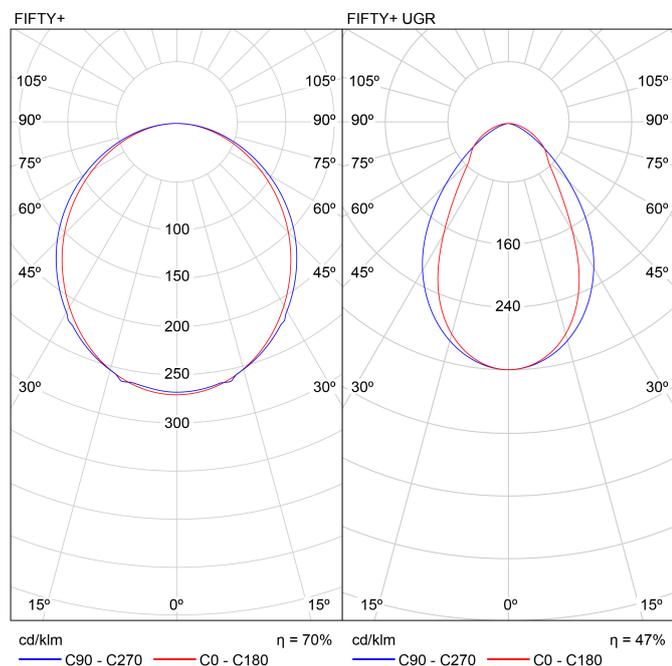

## Conical diagram

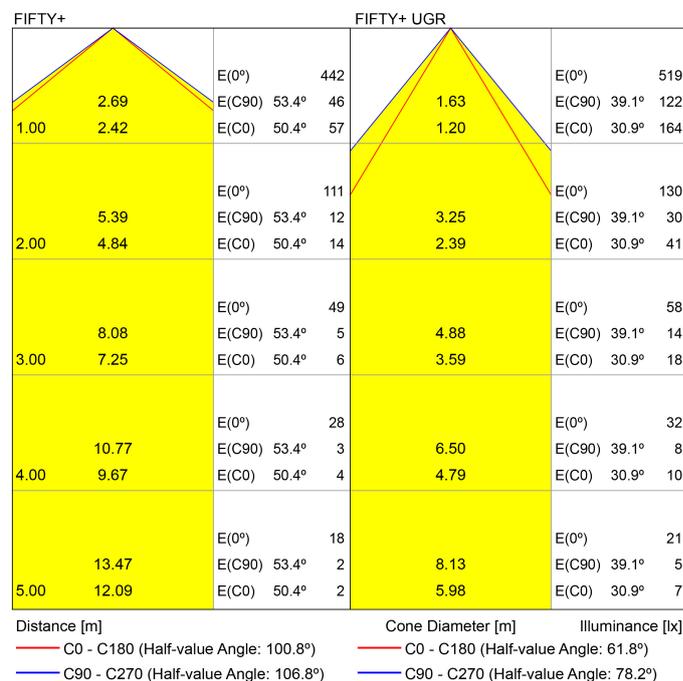

## UGR

Glare Evaluation According to UGR													
p Ceiling		70	70	50	50	30	70	70	50	50	30	30	
p Walls		50	30	50	30	30	50	30	50	30	30	30	
p Floor		20	20	20	20	20	20	20	20	20	20	20	
Room Size X Y	Viewing direction at right angles to lamp axis	Viewing direction parallel to lamp axis											
2H	2H	21.0	22.3	21.3	22.5	22.8	21.4	22.7	21.7	22.9	23.1		
	3H	22.7	23.8	23.0	24.1	24.4	23.1	24.3	23.4	24.5	24.8		
	4H	23.3	24.4	23.6	24.6	24.9	23.7	24.8	24.1	25.1	25.4		
	6H	23.7	24.7	24.0	25.0	25.3	24.2	25.2	24.6	25.5	25.9		
	8H	23.8	24.8	24.2	25.1	25.4	24.4	25.4	24.7	25.7	26.0		
4H	2H	21.6	22.7	21.9	23.0	23.2	21.9	23.0	22.2	23.2	23.5		
	3H	23.4	24.4	23.8	24.7	25.0	23.8	24.8	24.2	25.1	25.4		
	4H	24.2	25.0	24.6	25.4	25.7	24.6	25.4	25.0	25.8	26.2		
	6H	24.7	25.5	25.2	25.9	26.3	25.2	25.9	25.6	26.3	26.7		
	8H	24.9	25.6	25.4	26.0	26.4	25.4	26.1	25.9	26.5	26.9		
8H	2H	25.0	25.6	25.5	26.1	26.5	25.6	26.2	26.0	26.6	27.0		
	4H	24.5	25.2	24.9	25.6	26.0	24.9	25.5	25.3	25.9	26.3		
	6H	25.2	25.7	25.6	26.2	26.6	25.6	26.1	26.1	26.6	27.0		
	8H	25.4	25.9	25.9	26.4	26.8	25.9	26.4	26.4	26.8	27.3		
	12H	25.6	26.0	26.1	26.5	27.0	26.1	26.5	26.6	27.0	27.5		
12H	4H	24.5	25.1	25.0	25.5	26.0	24.9	25.5	25.3	25.9	26.3		
	6H	25.3	25.7	25.7	26.2	26.7	25.7	26.1	26.1	26.6	27.1		
	8H	25.5	25.9	26.0	26.4	26.9	26.0	26.4	26.5	26.9	27.4		
	12H												
Variation of the observer position for the luminaire distances S													
S = 1.0H		+0.1 / -0.1					+0.1 / -0.1						
S = 1.5H		+0.2 / -0.4					+0.2 / -0.4						
S = 2.0H		+0.4 / -0.8					+0.4 / -0.7						
Standard table		BK05					BK06						
Correction Summand		5.0					5.9						
Corrected Glare Indices referring to 1630lm Total Luminous Flux													

## UGR

Glare Evaluation According to UGR													
p Ceiling		70	70	50	50	30	70	70	50	50	30	30	
p Walls		50	30	50	30	30	50	30	50	30	30	30	
p Floor		20	20	20	20	20	20	20	20	20	20	20	
Room Size X Y	Viewing direction at right angles to lamp axis	Viewing direction parallel to lamp axis											
2H	2H	16.5	17.6	16.8	17.8	18.0	16.0	17.0	16.2	17.2	17.4		
	3H	18.2	19.1	18.5	19.4	19.6	17.0	18.0	17.3	18.2	18.5		
	4H	18.8	19.7	19.1	19.9	20.2	17.4	18.3	17.7	18.6	18.8		
	6H	19.2	20.0	19.5	20.3	20.6	17.7	18.5	18.0	18.8	19.1		
	8H	19.3	20.1	19.6	20.4	20.7	17.8	18.5	18.1	18.8	19.1		
4H	2H	16.8	17.7	17.1	17.9	18.2	16.3	17.2	16.6	17.5	17.7		
	3H	18.7	19.4	19.0	19.7	20.1	17.6	18.4	18.0	18.7	19.0		
	4H	19.4	20.0	19.8	20.4	20.7	18.2	18.8	18.5	19.1	19.5		
	6H	19.9	20.5	20.3	20.8	21.2	18.5	19.1	18.9	19.5	19.9		
	8H	20.1	20.6	20.5	21.0	21.4	18.7	19.2	19.1	19.6	20.0		
8H	2H	20.2	20.6	20.6	21.0	21.5	18.7	19.2	19.2	19.6	20.0		
	4H	19.5	20.0	19.9	20.4	20.8	18.4	18.9	18.8	19.3	19.7		
	6H	20.1	20.6	20.6	21.0	21.4	18.9	19.3	19.3	19.7	20.2		
	8H	20.4	20.7	20.8	21.2	21.6	19.1	19.4	19.5	19.9	20.3		
	12H	20.5	20.8	21.0	21.3	21.8	19.2	19.5	19.7	20.0	20.5		
12H	4H	19.5	20.0	20.0	20.4	20.8	18.4	18.9	18.9	19.3	19.7		
	6H	20.2	20.5	20.6	21.0	21.4	18.9	19.3	19.4	19.7	20.2		
	8H	20.4	20.7	20.9	21.2	21.7	19.1	19.5	19.6	19.9	20.4		
	12H												
Variation of the observer position for the luminaire distances S													
S = 1.0H		+0.3 / -0.3					+0.3 / -0.5						
S = 1.5H		+0.5 / -0.4					+1.2 / -1.2						
S = 2.0H		+0.9 / -0.9					+2.3 / -1.8						
Standard table		BK05					BK03						
Correction Summand		-0.9					-2.4						
Corrected Glare Indices referring to 1630lm Total Luminous Flux													

MANDATORY FOR INSTALLATION

FIFTY +Diffuser ( x meter)	LOR
A447-00-00	70%

Max length 30 m.



FIFTY +UGR Diffuser ( x meter)*	LOR
A447-00-10	47%

Max length 30 m.



FIFTY +End Caps Kit
A447-00-20-   WT   NT





FIFTY +Straight Joiner
A447-00-30



FIFTY +Power Line
A443-00-00



## Connection diagram:

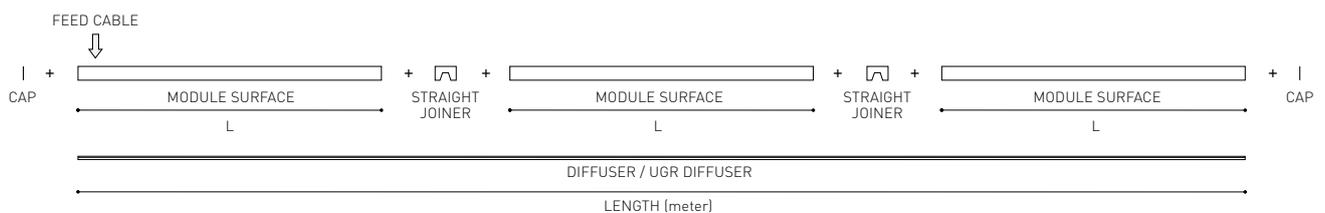

### PRODUCT CONFIGURATOR

Use our online configurator to design your own custom product layout. The tool will guide you through the process and automatically calculate the required drivers and accessories.

[Start your configuration →](#)

COLOUR | WT  | NT  | MATERIAL |  AL |  PC |



Fuente de luz (LED) reemplazable por un profesional autorizado

Replaceable (LED only) light source by an authorized professional.

Source lumineuse (LED) remplaçable par un professionnel agréé

Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato

Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado

Replaceable control gear by an authorized professional

Dispositif de commande remplaçable par un professionnel agréé

Alimentatore sostituibile da parte di un professionista autorizzato

Auswechselbares Betriebsgerät durch autorisierten Fachmann

## Instrucciones para el final de vida y la eliminación de los componentes:

### Instructions on end-of-life and component disposal:

### Instructions pour la gestion des composants en fin de vie et leur mise au rebut :

### Istruzioni per il fine vita e lo smaltimento dei componenti:

### Anweisungen zur entsorgung der Leuchtenkomponenten:




Interrumpir la alimentación del aparato  
Cut the power supply to the luminaire  
Couper l'alimentation du luminaire  
Interrompere l'alimentazione dell'apparecchio  
Stromversorgung der Leuchte unterbrechen



Quitar la(s) fuente(s) de luz para el desecho  
Remove light source(s) for disposal  
Retirer la (les) source(s) lumineuse(s) pour l'élimination  
Rimuovere la/le sorgente/e di luce per lo smaltimento  
Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho  
Remove the battery for decommissioning  
Retirer la batterie pour sa mise au rebut  
Rimuovere la batteria per la dismissione  
Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho  
Remove control gear for disposal  
Retirer le dispositif de commande pour l'élimination  
Rimuovere l'alimentatore per lo smaltimento  
Betriebsgerät zur Entsorgung ausbauen



Enviar los materiales a un centro de recogida RAEE  
Send the materials to a WEEE collection centre  
Envoyer les matériaux dans une déchetterie DEEE  
Inviare i materiali ad un centro di raccolta RAEE  
Die Materialien in einem WEEE-Zentrum entsorgen

