




Dimensions

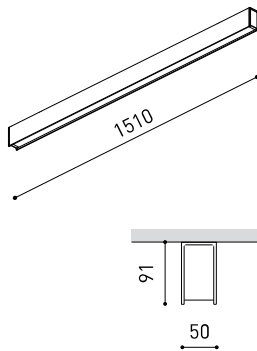

Name	FIFTY+ HQ SURFACE 150 4000K WT
Reference	A4451212WT
Colour	Textured white
RAL	9016
Category	SURFACE

Type	LED
Gross luminous flux	5160 lm
Colour temperature	4000 K
Chromatic stability	MacAdam Step 2
Colour Rendering Index	CRI>90
Power	35,4 W
Current	1050 mA
Efficacy	148 lm/W
LED lifespan	L80B10 >60.000h
Energy efficiency class	D

Lighting efficiency	70%
Light beam angle	104°

Driver	Included
Power values of the system	41,40 W
Frequency	50/60 Hz
Dimming	No Dim
Electrical insulation class	⚡

Sealing	IP20
Wireless control	Please Consult
Diffuser included	Yes
Weight	4420 g
Packaged weight	6630 g
Packaging dimensions	Ø157,5 x 1640 mm
Units per package	1
Materials	Aluminium / Polycarbonate

PRODUCT

LIGHT SOURCE

LIGHTING FIXTURE | PHOTOMETRIC DATA


LIGHTING FIXTURE | ELECTRICAL DATA

OTHER DATA



Fifty + is the longitudinal lighting profile for Surface application, individually. Fifty + adds functional light and visual support to highlight the lines, volumes and transitions defined in the architecture. Having an Opal diffuser which disperses the light and a UGR diffuser that reduces the glare angle. Both are installed as a single part along its entire length so as not to interrupt the light beam.


Polar diagram

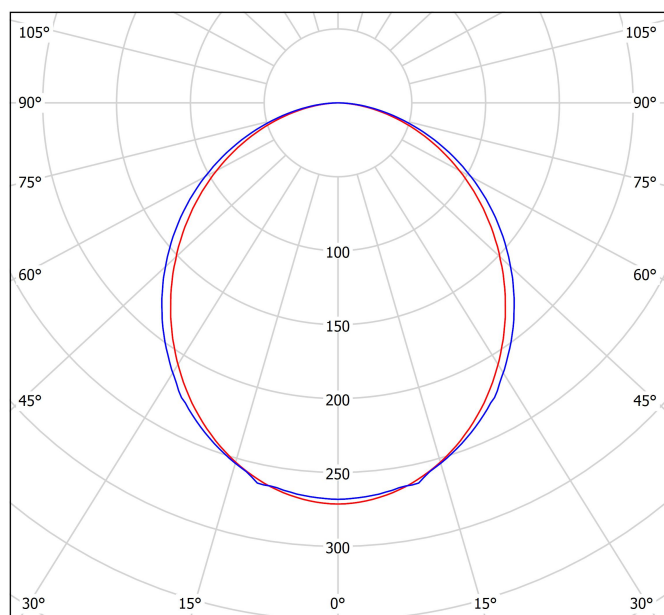

cd/klm
 — C0 - C180 — C90 - C270

η = 70%

Conical diagram

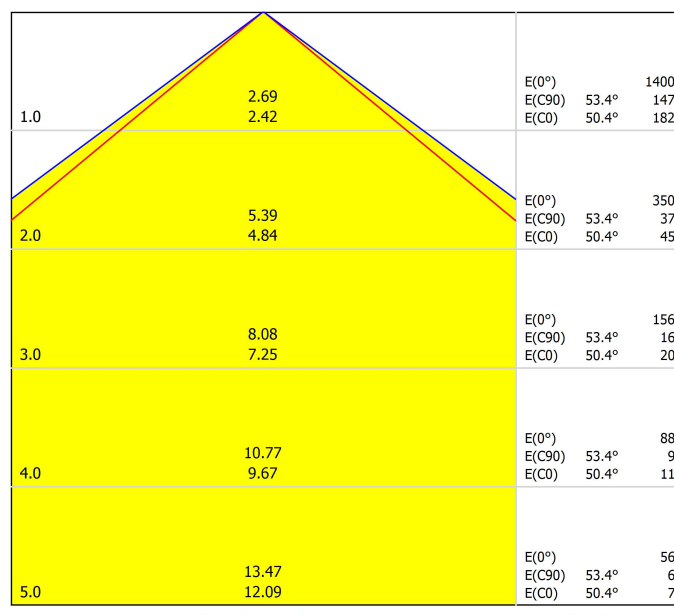

Distance [m] Cone Diameter [m] Illuminance [lx]
 — C0 - C180 (Half-value Angle: 100.8°)
 — C90 - C270 (Half-value Angle: 106.8°)

UGR

Glare Evaluation According to UGR													
ρ Ceiling	70	70	50	50	30	70	70	50	50	30	70	70	
ρ Walls	50	30	50	30	30	50	30	50	30	30	50	30	
ρ Floor	20	20	20	20	20	20	20	20	20	20	20	20	
Room Size X Y	Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis							
2H	2H	21.3	22.6	21.6	22.8	23.1	21.7	23.0	22.0	23.2	23.4		
	3H	23.0	24.2	23.3	24.4	24.7	23.4	24.6	23.7	24.9	25.1		
	4H	23.6	24.7	23.9	25.0	25.3	24.1	25.2	24.4	25.5	25.7		
	6H	24.0	25.0	24.4	25.3	25.7	24.5	25.6	24.9	25.9	26.2		
	8H	24.1	25.1	24.5	25.4	25.8	24.7	25.7	25.1	26.0	26.3		
4H	2H	21.9	23.0	22.2	23.3	23.6	22.2	23.3	22.5	23.6	23.9		
	3H	23.8	24.7	24.1	25.0	25.4	24.1	25.1	24.5	25.4	25.7		
	4H	24.5	25.4	24.9	25.7	26.1	24.9	25.8	25.3	26.1	26.5		
	6H	25.1	25.8	25.5	26.2	26.6	25.5	26.3	26.0	26.6	27.0		
	8H	25.3	25.9	25.7	26.3	26.7	25.8	26.4	26.2	26.8	27.2		
8H	2H	24.8	25.5	25.2	25.9	26.3	25.2	25.9	25.6	26.2	26.7		
	3H	25.5	26.1	26.0	26.5	26.9	25.9	26.5	26.4	26.9	27.4		
	4H	25.8	26.2	26.2	26.7	27.2	26.2	26.7	26.7	27.1	27.6		
	6H	25.9	26.3	26.4	26.8	27.3	26.4	26.8	26.9	27.3	27.8		
	8H	25.9	26.3	26.4	26.7	27.2	26.3	26.7	26.8	27.2	27.7		
12H	2H	24.8	25.4	25.3	25.9	26.3	25.2	25.8	25.6	26.2	26.6		
	3H	25.6	26.1	26.1	26.5	27.0	26.0	26.5	26.5	26.9	27.4		
	4H	25.9	26.3	26.4	26.7	27.2	26.3	26.7	26.8	27.2	27.7		
	6H	25.9	26.3	26.4	26.7	27.2	26.3	26.7	26.8	27.2	27.7		
	8H	25.9	26.3	26.4	26.7	27.2	26.3	26.7	26.8	27.2	27.7		
Variation of the observer position for the luminaire distances S													
S = 1.0H	+0.1 / -0.1					+0.1 / -0.1							
S = 1.5H	+0.2 / -0.4					+0.2 / -0.4							
S = 2.0H	+0.4 / -0.8					+0.4 / -0.7							
Standard table	BK05					BK06							
Correction Summand	1.3					2.3							
Corrected Glare Indices referring to 5160lm Total Luminous Flux													



Fuente de luz (LED) reemplazable por un profesional autorizado
 Replaceable (LED only) light source by an authorized professional.
 Source lumineuse (LED) remplaçable par un professionnel agréé
 Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato
 Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado
 Replaceable control gear by an authorized professional
 Dispositif de commande remplaçable par un professionnel agréé
 Alimentatore sostituibile da parte di un professionista autorizzato
 Auswechselbares Betriebsgerät durch autorisierten Fachmann

Instrucciones para el final de vida y la eliminación de los componentes:

Instructions on end-of-life and component disposal:

Instructions pour la gestion des composants en fin de vie et leur mise au rebut :

Istruzioni per il fine vita e lo smaltimento dei componenti:

Anweisungen zur entsorgung der Leuchtenkomponenten:



Interrumpir la alimentación del aparato
 Cut the power supply to the luminaire
 Couper l'alimentation du luminaire
 Interrompere l'alimentazione dell'apparecchio
 Stromversorgung der Leuchte unterbrechen



Quitar la(s) fuente(s) de luz para el desecho
 Remove light source(s) for disposal
 Retirer la (les) source(s) lumineuse(s) pour l'élimination
 Rimuovere la/le sorgente/e di luce per lo smaltimento
 Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho
 Remove the battery for decommissioning
 Retirer la batterie pour sa mise au rebut
 Rimuovere la batteria per la dismissione
 Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho
 Remove control gear for disposal
 Retirer le dispositif de commande pour l'élimination
 Rimuovere l'alimentatore per lo smaltimento
 Betriebsgerät zur Entsorgung ausbauen



Enviar los materiales a un centro de recogida RAEE
 Send the materials to a WEEE collection centre
 Envoyer les matériaux dans une déchetterie DEEE
 Inviare i materiali ad un centro di raccolta RAEE
 Die Materialien in einem WEEE-Zentrum entsorgen

