




Dimensions



Awards



PRODUCT

Name	SHOT LIGHT BIG 2 SPOT 2700K N
Reference	A4482110N
Colour	Black
RAL	Colour in the mass looks alike RAL 9005
Category	CEILING RECESSED

LIGHT SOURCE

Type	LED
Gross luminous flux	2010 lm
Colour temperature	2700 K
Chromatic stability	MacAdam Step 2
Colour Rendering Index	CRI>90
Power	17,5 W
Current	500 mA
Efficacy	115 lm/W
LED lifespan	L80B10 >60.000h
Energy efficiency class	F

LIGHTING FIXTURE | PHOTOMETRIC DATA

Lighting efficiency	89%
Light beam angle	18°

LIGHTING FIXTURE | ELECTRICAL DATA

Driver	Included - Connected
Power values of the system	20,23 W
Frequency	50/60 Hz
Dimming	No Dim - Other DIM, please consult
Electrical insulation class	<input type="checkbox"/>


OTHER DATA

Sealing	IP20
Wireless control	Please Consult
Emergency power supply	Please Consult
Recess measurements	Ø121 mm
Weight	620 g
Packaged weight	745 g
Packaging dimensions	150 x 158 x 128 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate




Shot Light Big is the downlight with the 'The Invisible Black' effect whose illumination enhances the majesty of large vertical spaces thanks to its great light through. It has been carefully designed so that the source of the light is not visible from almost any natural position of the observer, eliminating glare and ensuring perfect visual comfort.

Polar diagram

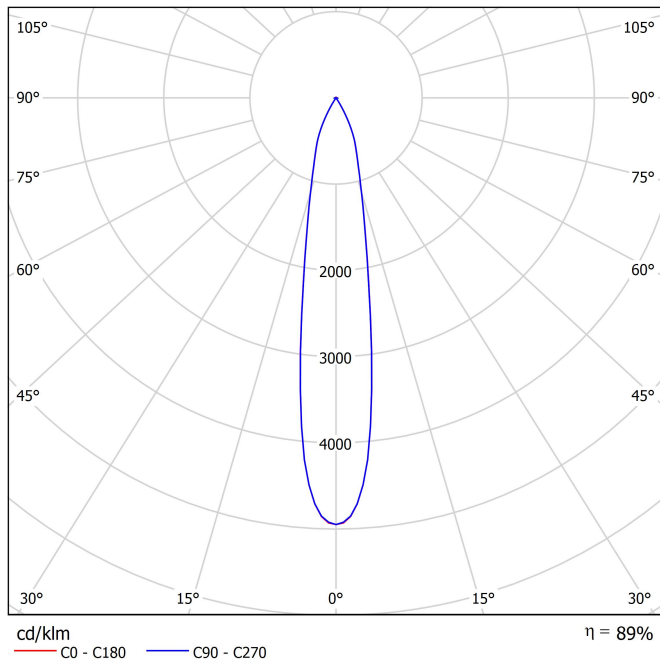


Conical diagram

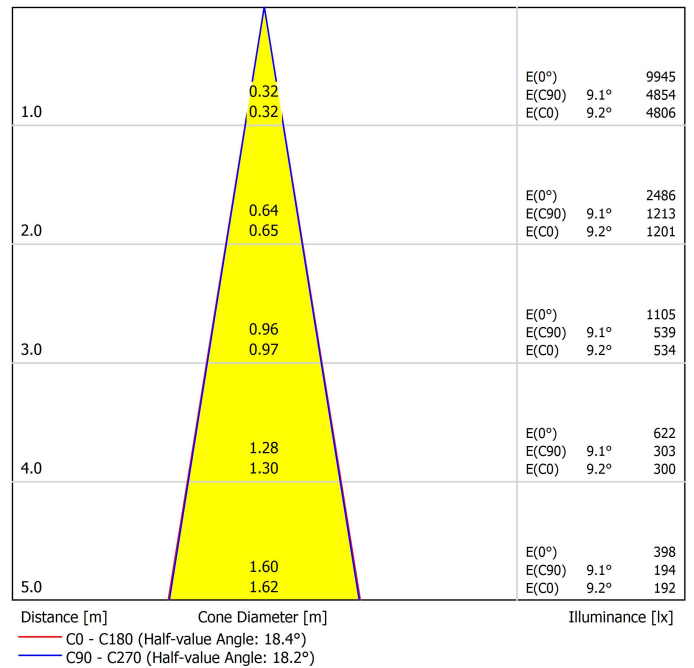

UGR

Glare Evaluation According to UGR													
		70	70	50	50	30	70	70	50	50	30		
p Ceiling		70	70	50	50	30	70	70	50	50	30		
p Walls		50	30	50	30	30	50	30	50	30	30		
p Floor		20	20	20	20	20	20	20	20	20	20		
Room Size	Viewing direction at right angles to lamp axis	Viewing direction parallel to lamp axis											
X Y		20	30	40	50	60	20	30	40	50	60	20	
2H	2H	-10.6	-10.0	-10.4	-9.8	-9.6	-10.6	-9.9	-10.3	-9.7	-9.5		
	3H	-7.7	-7.1	-7.4	-6.9	-6.7	-5.7	-5.1	-5.4	-4.9	-4.7		
	4H	-4.2	-3.6	-3.9	-3.4	-3.1	-4.2	-3.6	-3.9	-3.4	-3.1		
	6H	-2.3	-1.8	-2.0	-1.5	-1.2	-1.7	-1.2	-1.3	-0.9	-0.6		
	8H	-1.3	-0.8	-0.9	-0.5	-0.2	-0.6	-0.2	-0.3	0.1	0.4		
4H	12H	0.1	0.5	0.4	0.8	1.1	0.2	0.6	0.5	0.9	1.3		
	2H	-8.7	-8.2	-8.4	-7.9	-7.7	-8.7	-8.2	-8.4	-7.9	-7.7		
	3H	-5.3	-4.9	-5.0	-4.6	-4.3	-4.0	-3.6	-3.7	-3.3	-3.0		
	4H	-2.6	-2.2	-2.2	-1.8	-1.5	-2.1	-1.8	-1.8	-1.4	-1.1		
	6H	-0.4	-0.1	0.0	0.3	0.7	0.2	0.5	0.6	0.9	1.2		
8H	8H	0.7	1.0	1.1	1.4	1.8	1.3	1.6	1.7	1.9	2.3		
	12H	2.1	2.4	2.5	2.8	3.2	2.2	2.4	2.6	2.8	3.2		
	4H	-1.6	-1.3	-1.2	-0.9	-0.5	-1.3	-1.0	-0.8	-0.6	-0.2		
	6H	0.8	1.0	1.2	1.4	1.9	1.3	1.5	1.7	1.9	2.3		
	8H	2.0	2.2	2.5	2.6	3.1	2.5	2.7	3.0	3.2	3.6		
12H	12H	3.7	3.8	4.1	4.3	4.8	3.7	3.8	4.2	4.3	4.8		
	4H	-1.3	-1.1	-0.9	-0.7	-0.3	-1.1	-0.8	-0.6	-0.4	-0.0		
	6H	1.2	1.4	1.7	1.8	2.3	1.6	1.8	2.1	2.2	2.7		
	8H	2.5	2.6	3.0	3.1	3.6	3.0	3.1	3.4	3.6	4.1		
Variation of the observer position for the luminaire distances S													
S = 1.0H		+4.9 / -2.3					+4.9 / -2.2						
S = 1.5H		+7.5 / -2.3					+7.6 / -2.6						
S = 2.0H		+9.6 / -3.3					+9.6 / -3.2						
Standard table		---					BK03						
Correction Summand		---					-15.5						
Corrected Glare Indices referring to 2010lm Total Luminous Flux													



Fuente de luz (LED) reemplazable por un profesional autorizado

Replaceable (LED only) light source by an authorized professional.

Source lumineuse (LED) remplaçable par un professionnel agréé

Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato

Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado

Replaceable control gear by an authorized professional

Dispositif de commande remplaçable par un professionnel agréé

Alimentatore sostituibile da parte di un professionista autorizzato

Auswechselbares Betriebsgerät durch autorisierten Fachmann

Instrucciones para el final de vida y la eliminación de los componentes:

Instructions on end-of-life and component disposal:

Instructions pour la gestion des composants en fin de vie et leur mise au rebut :

Istruzioni per il fine vita e lo smaltimento dei componenti:

Anweisungen zur entsorgung der Leuchtenkomponenten:



Interrumpir la alimentación del aparato
Cut the power supply to the luminaire
Couper l'alimentation du luminaire
Interrompere l'alimentazione dell'apparecchio
Stromversorgung der Leuchte unterbrechen



Quitar la(s) fuente(s) de luz para el desecho
Remove light source(s) for disposal
Retirer la (les) source(s) lumineuse(s) pour l'élimination
Rimuovere la/le sorgente/e di luce per lo smaltimento
Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho
Remove the battery for decommissioning
Retirer la batterie pour sa mise au rebut
Rimuovere la batteria per la dismissione
Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho
Remove control gear for disposal
Retirer le dispositif de commande pour l'élimination
Rimuovere l'alimentatore per lo smaltimento
Betriebsgerät zur Entsorgung ausbauen



Enviar los materiales a un centro de recogida RAEE
Send the materials to a WEEE collection centre
Envoyer les matériaux dans une déchetterie DEEE
Inviare i materiali ad un centro di raccolta RAEE
Die Materialien in einem WEEE-Zentrum entsorgen

