




## DIMENSIONS



## AWARDS

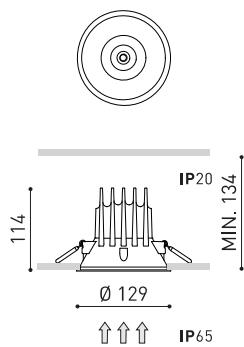

Name	SHOT LIGHT BIG IP65 3 FLOOD DIM DALI 3000K W
Reference	A4493221W
Color	White
RAL	Colour in the mass looks alike RAL 9016
Category	CEILING RECESSED

Type	LED
Gross luminous flux	2780 lm
Colour temperature	3000 K
Chromatic stability	MacAdam Step 2
Colour Rendering Index	CRI > 90
Power	25,3 W
Current	700 mA
Efficacy	103 lm/W
LED lifespan	L80B10 > 60.000h

## LIGHT SOURCE

## LIGHTING FIXTURE | PHOTOMETRIC DATA

Lighting efficiency	86%
Light beam angle	50°

## LIGHTING FIXTURE | ELECTRICAL DATA

Driver	Included - Connected
Power values of the system	29,05 W
Frequency	50/60 Hz
Dimming	DALI - Other DIM, please consult
Electrical insulation class	□


## OTHER DATA

Sealing	IP65
Wireless control	Please Consult
Emergency power supply	Please Consult
Recess measurements	Ø121 mm
Weight	637 g
Packaged weight	762 g
Packaging dimensions	150 x 158 x 128 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate




Shot Light Big is the downlight with the "The Invisible Black" effect whose illumination enhances the majesty of large vertical spaces thanks to its great light through. It has been carefully designed so that the source of the light is not visible from almost any natural position of the observer, eliminating glare and ensuring perfect visual comfort.

POLAR DIAGRAM

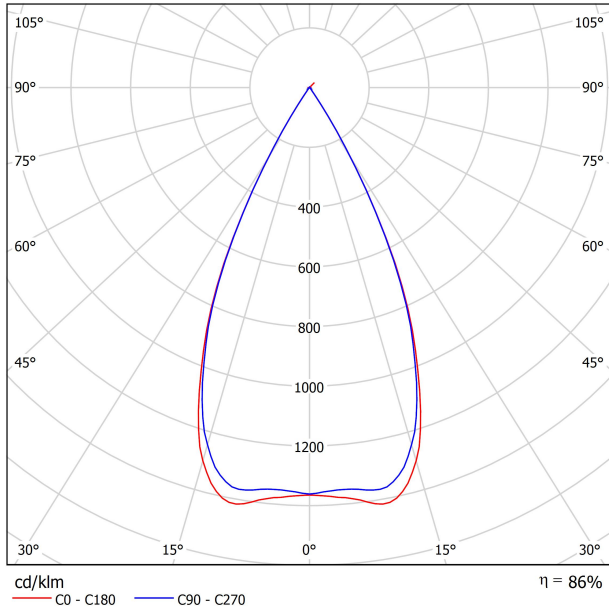

CONICAL DIAGRAM

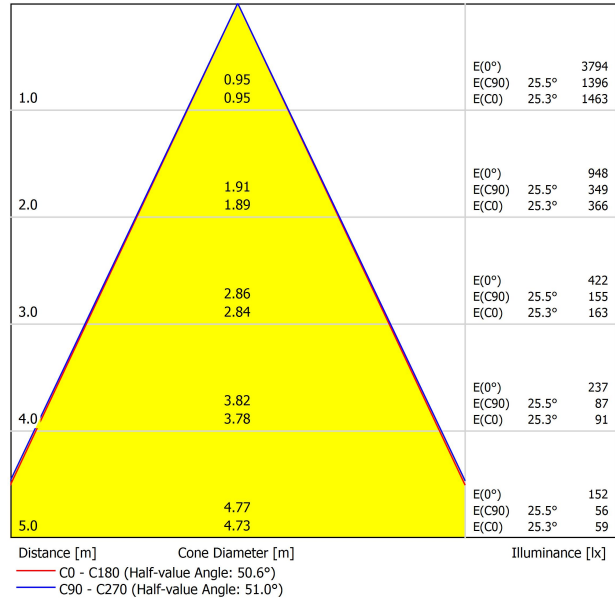

UGR

Glare Evaluation According to UGR											
ρ Ceiling		70	70	50	50	30	70	70	50	50	30
ρ Walls		50	30	50	30	30	50	30	50	30	30
ρ Floor		20	20	20	20	20	20	20	20	20	20
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	-13.7	-13.0	-13.4	-12.8	-12.6	-13.3	-12.7	-13.1	-12.5	-12.3
	3H	-10.0	-9.4	-9.7	-9.2	-9.0	-8.5	-7.9	-8.2	-7.7	-7.5
	4H	-9.1	-8.6	-8.8	-8.3	-8.1	-6.6	-6.0	-6.3	-5.8	-5.5
	6H	-6.2	-5.7	-5.9	-5.4	-5.2	-3.6	-3.1	-3.3	-2.8	-2.5
	8H	-4.7	-4.2	-4.4	-4.0	-3.7	-2.2	-1.7	-1.8	-1.4	-1.1
4H	12H	-3.2	-2.8	-2.9	-2.5	-2.2	-0.7	-0.2	-0.3	0.1	0.4
	2H	-12.3	-11.8	-12.0	-11.5	-11.3	-12.1	-11.6	-11.8	-11.3	-11.1
	3H	-8.9	-8.5	-8.6	-8.2	-7.8	-7.6	-7.1	-7.3	-6.8	-6.5
	4H	-7.1	-6.7	-6.7	-6.4	-6.0	-5.4	-5.0	-5.0	-4.7	-4.3
	6H	-4.3	-3.9	-3.9	-3.6	-3.2	-2.1	-1.8	-1.7	-1.4	-1.0
8H	8H	-2.8	-2.5	-2.4	-2.2	-1.8	-0.6	-0.3	-0.2	0.1	0.5
	12H	-1.3	-1.1	-0.9	-0.7	-0.2	1.0	1.3	1.5	1.7	2.1
	4H	-6.0	-5.7	-5.6	-5.3	-4.9	-4.7	-4.4	-4.3	-4.0	-3.6
	6H	-3.0	-2.7	-2.5	-2.3	-1.9	-1.2	-1.0	-0.8	-0.6	-0.2
	8H	-1.5	-1.3	-1.0	-0.9	-0.4	0.4	0.5	0.8	1.0	1.4
12H	12H	0.2	0.3	0.7	0.8	1.3	2.2	2.4	2.7	2.8	3.3
	4H	-5.5	-5.3	-5.1	-4.9	-4.5	-4.5	-4.2	-4.0	-3.8	-3.4
	6H	-2.6	-2.4	-2.2	-2.0	-1.5	-1.1	-0.9	-0.6	-0.4	0.0
8H	-1.1	-1.0	-0.6	-0.5	-0.0	0.6	0.7	1.1	1.2	1.7	
Variation of the observer position for the luminaire distances S											
S = 1.0H		+6.9 / -9.1					+6.7 / -7.5				
S = 1.5H		+9.7 / -9.9					+9.5 / -8.2				
S = 2.0H		+11.7 / -10.1					+11.6 / -8.6				
Standard table		BK00					BK00				
Correction Summand		-12.8					-12.7				
Corrected Glare Indices referring to 2780lm Total Luminous Flux											



Fuente de luz (LED) reemplazable por un profesional autorizado

Replaceable (LED only) light source by an authorized professional.

Source lumineuse (LED) remplaçable par un professionnel agréé

Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato

Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado

Replaceable control gear by an authorized professional

Dispositif de commande remplaçable par un professionnel agréé

Alimentatore sostituibile da parte di un professionista autorizzato

Auswechselbares Betriebsgerät durch autorisierten Fachmann

## INSTRUCCIONES PARA EL FINAL DE VIDA Y LA ELIMINACIÓN LOS COMPONENTES

### INSTRUCTIONS ON END-OF-LIFE AND COMPONENT DISPOSAL

### INSTRUCTIONS POUR LA GESTION DES COMPOSANTS EN FIN DE VIE ET LEUR MISE AU REBUT

### ISTRUZIONI PER IL FINE VITA E LO SMALTIMENTO DEI COMPONENTI

### ANWEISUNGEN ZUR ENTSORGUNG DER LEUCHTENKOMPONENTEN



Interrumpir la alimentación del aparato

Cut the power supply to the luminaire

Couper l'alimentation du luminaire

Interrompere l'alimentazione dell'apparecchio

Stromversorgung der Leuchte unterbrechen



Quitar la(s) fuente(s) de luz para el desecho

Remove light source(s) for disposal

Retirer la (les) source(s) lumineuse(s) pour l'élimination

Rimuovere la/le sorgente/e di luce per lo smaltimento

Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho

Remove the battery for decommissioning

Retirer la batterie pour sa mise au rebut

Rimuovere la batteria per la dismissione

Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho

Remove control gear for disposal

Retirer le dispositif de commande pour l'élimination

Rimuovere l'alimentatore per lo smaltimento

Betriebsgerät zur Entsorgung ausbauen



Enviar los materiales a un centro de recogida RAEE

Send the materials to a WEEE collection centre

Envoyer les matériaux dans une déchetterie DEEE

Inviare i materiali ad un centro di raccolta RAEE

Die Materialien in einem WEEE-Zentrum entsorgen

