


## DIMENSIONS



## ACCESSORIES



DRIVER OPTIONS

|           |                       |
|-----------|-----------------------|
| Name      | REC MICRO 4000K PAINT |
| Reference | A4610002PR            |
| Color     | Primer coating        |
| Category  | WALL                  |

## PRODUCT

|                        |                 |
|------------------------|-----------------|
| Type                   | LED             |
| Gross luminous flux    | 1650 lm         |
| Colour temperature     | 4000 K          |
| Chromatic stability    | MacAdam Step 2  |
| Colour Rendering Index | CRI>90          |
| Power                  | 12,8 W          |
| Current                | 700 mA          |
| Efficacy               | 129 lm/W        |
| LED lifespan           | L80B10 >60.000h |

## LIGHT SOURCE

|                     |     |
|---------------------|-----|
| Lighting efficiency | 87% |
| Light beam angle    | 97° |

## LIGHTING FIXTURE | PHOTOMETRIC DATA

|                             |                                    |
|-----------------------------|------------------------------------|
| Driver                      | Excluded: Must be placed on remote |
| Dimming                     | No Dim / DALI                      |
| Electrical insulation class | II                                 |

## LIGHTING FIXTURE | ELECTRICAL DATA


|                      |                                     |
|----------------------|-------------------------------------|
| Sealing              | IP20                                |
| Wireless control     | Please Consult                      |
| Weight               | 245 g                               |
| Packaged weight      | 275 g                               |
| Packaging dimensions | 124 x 115 x 37 mm                   |
| Units per package    | 1                                   |
| Materials            | Aluminium / Polymethyl Methacrylate |

## OTHER DATA





Rec is a LED appliance that is especially ideal to carry out indirect lighting functions. This is a luminary that perfectly fits into projects that prioritise the comfort given by indirect lighting but also require a high volume of light. Formally, Rec is expressed in a slender cuboid with pure lines and a minimalist design.

POLAR DIAGRAM

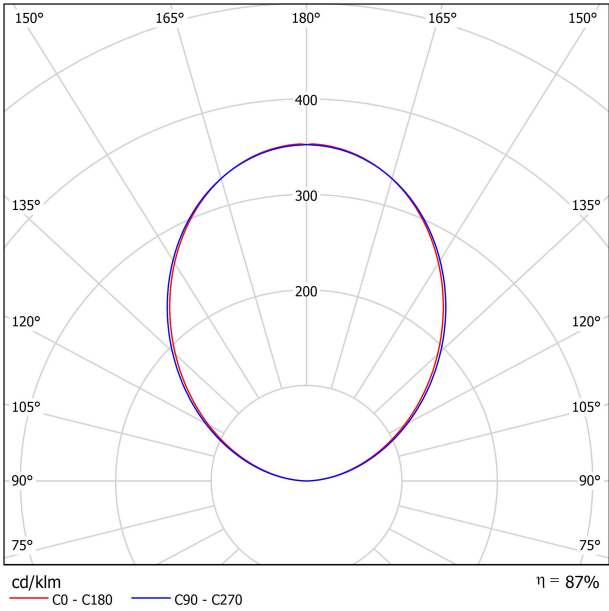

CONICAL DIAGRAM

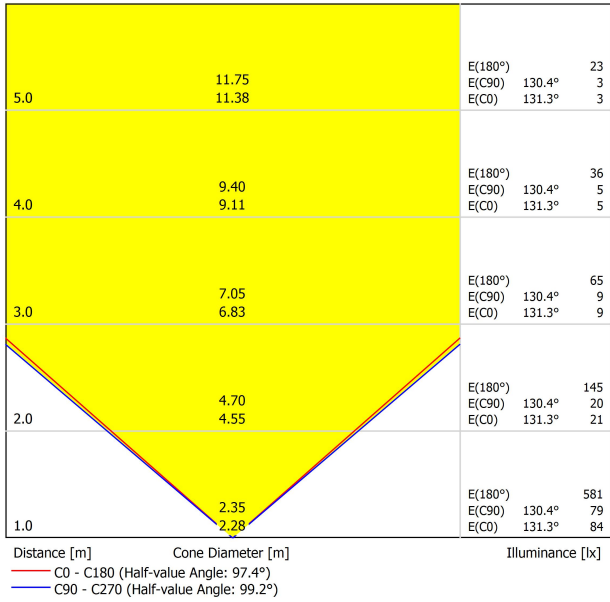



| DRIVER OPTIONS                                                                                |                                       | P     | I     | CCT  | Flux    |
|-----------------------------------------------------------------------------------------------|---------------------------------------|-------|-------|------|---------|
| <br>NO DIM | <b>0434-00-40</b><br>1 to 2 Rec Micro | 12,8W | 700mA | 2700 | 1465 lm |
|                                                                                               |                                       |       |       | 3000 | 1560 lm |
|                                                                                               |                                       |       |       | 4000 | 1650 lm |
|                                                                                               | <b>0434-01-43</b><br>1 to 3 Rec Micro | 12,8W | 700mA | 2700 | 1465 lm |
|                                                                                               |                                       |       |       | 3000 | 1560 lm |
|                                                                                               |                                       |       |       | 4000 | 1650 lm |
| <br>DALI   | <b>0434-00-46</b><br>1 to 2 Rec Micro | 12,8W | 700mA | 2700 | 1465 lm |
|                                                                                               |                                       |       |       | 3000 | 1560 lm |
|                                                                                               |                                       |       |       | 4000 | 1650 lm |
|                                                                                               | <b>0434-01-25</b><br>1 to 3 Rec Micro | 12,8W | 700mA | 2700 | 1465 lm |
|                                                                                               |                                       |       |       | 3000 | 1560 lm |
|                                                                                               |                                       |       |       | 4000 | 1650 lm |

220  
240 V~

Driver must be placed on remote



Fuente de luz (LED) reemplazable por un profesional autorizado

Replaceable (LED only) light source by an authorized professional.

Source lumineuse (LED) remplaçable par un professionnel agréé

Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato

Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado

Replaceable control gear by an authorized professional

Dispositif de commande remplaçable par un professionnel agréé

Alimentatore sostituibile da parte di un professionista autorizzato

Auswechselbares Betriebsgerät durch autorisierten Fachmann

## INSTRUCCIONES PARA EL FINAL DE VIDA Y LA ELIMINACIÓN LOS COMPONENTES

### INSTRUCTIONS ON END-OF-LIFE AND COMPONENT DISPOSAL

### INSTRUCTIONS POUR LA GESTION DES COMPOSANTS EN FIN DE VIE ET LEUR MISE AU REBUT

### ISTRUZIONI PER IL FINE VITA E LO SMALTIMENTO DEI COMPONENTI

### ANWEISUNGEN ZUR ENTSORGUNG DER LEUCHTENKOMPONENTEN



Interrumpir la alimentación del aparato

Cut the power supply to the luminaire

Couper l'alimentation du luminaire

Interrompere l'alimentazione dell'apparecchio

Stromversorgung der Leuchte unterbrechen



Quitar la(s) fuente(s) de luz para el desecho

Remove light source(s) for disposal

Retirer la (les) source(s) lumineuse(s) pour l'élimination

Rimuovere la/le sorgente/e di luce per lo smaltimento

Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho

Remove the battery for decommissioning

Retirer la batterie pour sa mise au rebut

Rimuovere la batteria per la dismissione

Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho

Remove control gear for disposal

Retirer le dispositif de commande pour l'élimination

Rimuovere l'alimentatore per lo smaltimento

Betriebsgerät zur Entsorgung ausbauen

Enviar los materiales a un centro de recogida RAEE

Send the materials to a WEEE collection centre

Envoyer les matériaux dans une déchetterie DEEE

Inviare i materiali ad un centro di raccolta RAEE

Die Materialien in einem WEEE-Zentrum entsorgen

