


## DIMENSIONS



## ACCESSORIES

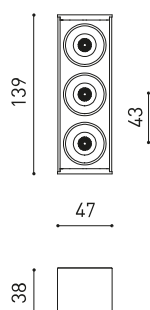

DRIVER OPTIONS

<b>Name</b>	BLACK FOSTER SURFACE REMOTE 3 FLOOD 2700K WTW
<b>Reference</b>	A4803000WTW
<b>Color</b>	Textured white - White
<b>RAL</b>	9016
<b>Category</b>	SURFACE

<b>Type</b>	LED
<b>Gross luminous flux</b>	570 lm
<b>Colour temperature</b>	2700 K
<b>Chromatic stability</b>	MacAdam Step 3
<b>Colour Rendering Index</b>	CRI>90
<b>Power</b>	6,3 W
<b>Current</b>	700 mA
<b>Efficacy</b>	90 lm/W
<b>LED lifespan</b>	L90B10 >102.000h

<b>Lighting efficiency</b>	86%
<b>Light beam angle</b>	38°

<b>Driver</b>	Excluded: Must be placed on remote
<b>Dimming</b>	No Dim / DALI
<b>Electrical insulation class</b>	III

<b>Sealing</b>	IP20
<b>Wireless control</b>	Please Consult
<b>Weight</b>	245 g
<b>Packaged weight</b>	300 g
<b>Packaging dimensions</b>	260 x 73 x 46 mm
<b>Units per package</b>	1
<b>Materials</b>	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate

## PRODUCT

## LIGHT SOURCE

## LIGHTING FIXTURE | PHOTOMETRIC DATA


## LIGHTING FIXTURE | ELECTRICAL DATA

## OTHER DATA




An unostentatious feature in the space. Black Foster Surface Remote's commitment to the use of a remote driver enabling its profile to be minimised to the extent necessary to integrate its invisible light optical system.

POLAR DIAGRAM

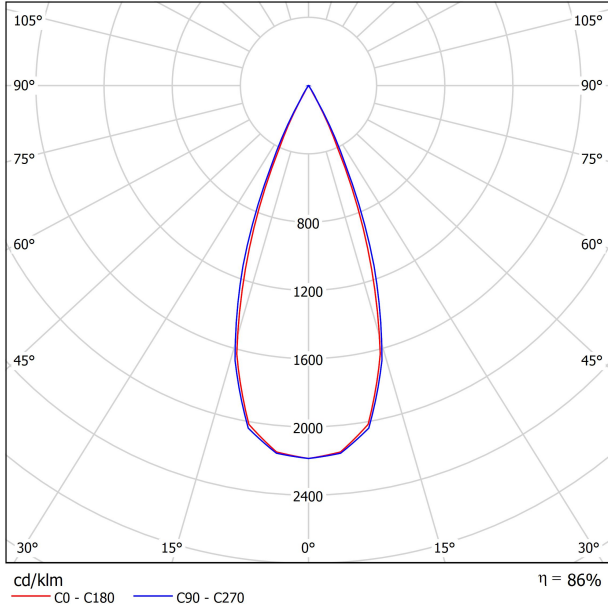

CONICAL DIAGRAM

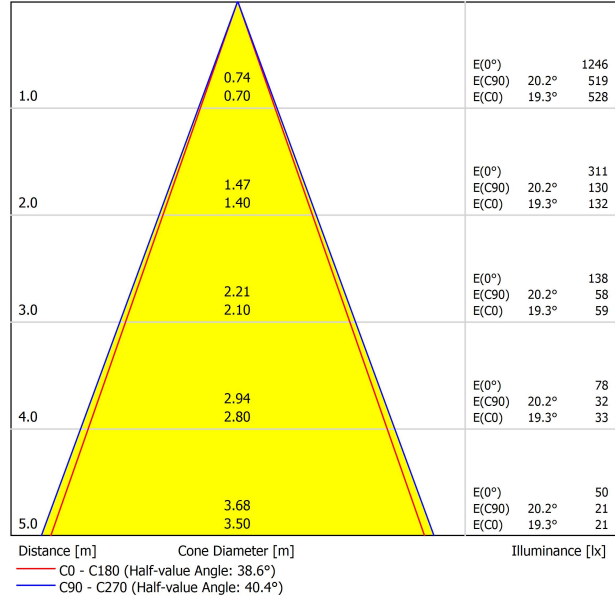

UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	30
ρ Walls		50	30	50	30	30	50	30	50	30	30	30
ρ Floor		20	20	20	20	20	20	20	20	20	20	20
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	-11.9	-11.3	-11.7	-11.1	-10.9	-12.0	-11.4	-11.7	-11.2	-11.0	
	3H	-7.0	-6.4	-6.7	-6.2	-5.9	-6.0	-5.5	-5.8	-5.2	-5.0	
	4H	-3.9	-3.4	-3.6	-3.1	-2.9	-2.7	-2.2	-2.4	-1.9	-1.6	
	6H	-0.5	-0.0	-0.2	0.2	0.5	0.9	1.4	1.2	1.7	2.0	
	8H	1.2	1.7	1.6	2.0	2.3	2.7	3.2	3.0	3.5	3.8	
4H	2H	-10.3	-9.7	-10.0	-9.5	-9.2	-10.3	-9.8	-10.0	-9.5	-9.3	
	3H	-5.2	-4.7	-4.8	-4.4	-4.1	-4.5	-4.0	-4.1	-3.7	-3.4	
	4H	-2.1	-1.7	-1.8	-1.4	-1.1	-1.1	-0.7	-0.8	-0.4	-0.1	
	6H	1.3	1.7	1.7	2.0	2.4	2.6	2.9	3.0	3.3	3.6	
	8H	3.2	3.4	3.6	3.8	4.2	4.5	4.8	4.9	5.1	5.5	
8H	2H	5.2	5.4	5.6	5.8	6.2	6.5	6.8	7.0	7.2	7.6	
	4H	-0.9	-0.6	-0.5	-0.2	0.2	-0.2	0.1	0.3	0.5	0.9	
	6H	2.7	2.9	3.2	3.4	3.8	3.7	3.9	4.2	4.3	4.8	
	8H	4.7	4.9	5.2	5.3	5.8	5.8	6.0	6.2	6.4	6.9	
	12H	6.9	7.0	7.4	7.5	8.0	8.0	8.2	8.5	8.6	9.1	
12H	4H	-0.3	-0.1	0.1	0.3	0.7	0.2	0.5	0.6	0.9	1.3	
	6H	3.3	3.5	3.7	3.9	4.4	4.1	4.3	4.6	4.7	5.2	
	8H	5.3	5.5	5.8	5.9	6.4	6.3	6.4	6.7	6.9	7.4	
Variation of the observer position for the luminaires distances S												
S = 1.0H		+0.7 / -0.3					+1.3 / -0.4					
S = 1.5H		+1.4 / -0.5					+2.7 / -0.7					
S = 2.0H		+2.4 / -0.8					+4.2 / -1.0					
Standard table Correction Summand		---					---					
Corrected Glare Indices referring to 570lm Total Luminous Flux												



DRIVER OPTIONS*		Black Foster Surface Remote 3	Black Foster Surface Remote 5	Black Foster Surface Remote 10	Black Foster Surface Remote 15
NO DIM 	0434-00-40	1 to 4	1 to 2	1	
	0434-01-43	1 to 6	1 to 3	1	1
DIM DALI 	0434-00-46	1 to 4	1 to 2	1	
	0434-01-25	1 to 6	1 to 3	1	1

220 V~  
240

\* Driver must be placed on remote



Fuente de luz (LED) reemplazable por un profesional autorizado  
 Replaceable (LED only) light source by an authorized professional.  
 Source lumineuse (LED) remplaçable par un professionnel agréé  
 Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato  
 Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado  
 Replaceable control gear by an authorized professional  
 Dispositif de commande remplaçable par un professionnel agréé  
 Alimentatore sostituibile da parte di un professionista autorizzato  
 Auswechselbares Betriebsgerät durch autorisierten Fachmann

INSTRUCCIONES PARA EL FINAL DE VIDA Y LA ELIMINACIÓN LOS COMPONENTES  
 INSTRUCTIONS ON END-OF-LIFE AND COMPONENT DISPOSAL  
 INSTRUCTIONS POUR LA GESTION DES COMPOSANTS EN FIN DE VIE ET LEUR MISE AU REBUT  
 ISTRUZIONI PER IL FINE VITA E LO SMALTIMENTO DEI COMPONENTI  
 ANWEISUNGEN ZUR ENTSORGUNG DER LEUCHTENKOMPONENTEN



Interrumpir la alimentación del aparato  
 Cut the power supply to the luminaire  
 Couper l'alimentation du luminaire  
 Interrompere l'alimentazione dell'apparecchio  
 Stromversorgung der Leuchte unterbrechen



Quitar la(s) fuente(s) de luz para el desecho  
 Remove light source(s) for disposal  
 Retirer la (les) source(s) lumineuse(s) pour l'élimination  
 Rimuovere la/le sorgente/e di luce per lo smaltimento  
 Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho  
 Remove the battery for decommissioning  
 Retirer la batterie pour sa mise au rebut  
 Rimuovere la batteria per la dismissione  
 Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho  
 Remove control gear for disposal  
 Retirer le dispositif de commande pour l'élimination  
 Rimuovere l'alimentatore per lo smaltimento  
 Betriebsgerät zur Entsorgung ausbauen

Enviar los materiales a un centro de recogida RAEE  
 Send the materials to a WEEE collection centre  
 Envoyer les matériaux dans une déchetterie DEEE  
 Inviare i materiali ad un centro di raccolta RAEE  
 Die Materialien in einem WEEE-Zentrum entsorgen

