




## DIMENSIONS



## ACCESSORIES

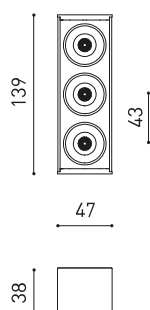

DRIVER OPTIONS

Name	BLACK FOSTER SURFACE REMOTE 3 SPOT 4000K NTMG
Reference	A4803102NTMG
Color	Textured black-Metallized gold
RAL	Metallic finish
Category	SURFACE

## PRODUCT

Type	LED
Gross luminous flux	750 lm
Colour temperature	4000 K
Chromatic stability	MacAdam Step 3
Colour Rendering Index	CRI>90
Power	6,3 W
Current	700 mA
Efficacy	119 lm/W
LED lifespan	L90B10 >102.000h

## LIGHT SOURCE

Lighting efficiency	90%
Light beam angle	19°

## LIGHTING FIXTURE | PHOTOMETRIC DATA

Driver	Excluded: Must be placed on remote
Dimming	No Dim / DALI
Electrical insulation class	⚡

## LIGHTING FIXTURE | ELECTRICAL DATA


Sealing	IP20
Wireless control	Please Consult
Weight	245 g
Packaged weight	300 g
Packaging dimensions	260 x 73 x 46 mm
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate

## OTHER DATA




An unostentatious feature in the space. Black Foster Surface Remote's commitment to the use of a remote driver enabling its profile to be minimised to the extent necessary to integrate its invisible light optical system.

POLAR DIAGRAM

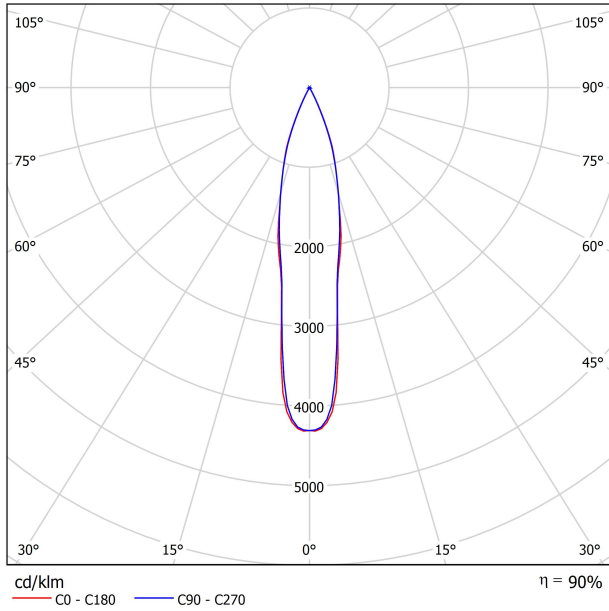


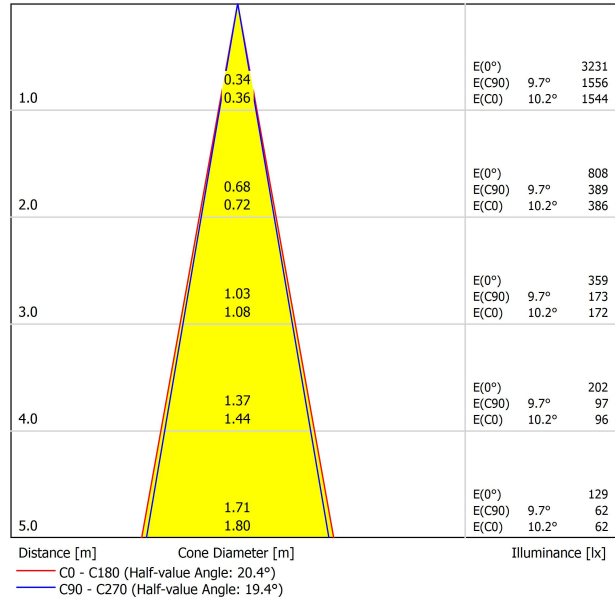

CONICAL DIAGRAM



UGR

Glare Evaluation According to UGR													
ρ Ceiling		70	70	50	50	30	30	70	70	50	50	30	30
ρ Walls		50	30	50	30	30	30	50	30	50	30	30	30
ρ Floor		20	20	20	20	20	20	20	20	20	20	20	20
Room Size X Y	Viewing direction at right angles to lamp axis						Viewing direction parallel to lamp axis						
	2H	2H	6.0	6.7	6.3	6.9	7.1	6.2	6.9	6.4	7.0	7.2	2H
	3H	9.6	10.2	9.9	10.5	10.7	9.7	10.3	10.0	10.6	10.8	3H	3H
	4H	11.5	12.1	11.8	12.3	12.6	11.6	12.2	11.9	12.5	12.7	4H	4H
	6H	13.6	14.1	13.9	14.4	14.7	13.6	14.2	14.0	14.5	14.8	6H	6H
	8H	14.8	15.3	15.1	15.6	15.9	14.9	15.5	15.3	15.8	16.1	8H	8H
	12H	16.2	16.7	16.5	17.0	17.3	16.3	16.8	16.7	17.1	17.4	12H	12H
4H	2H	7.1	7.7	7.4	7.9	8.2	7.2	7.8	7.5	8.0	8.3	4H	2H
	3H	10.9	11.4	11.2	11.7	12.0	11.0	11.5	11.3	11.8	12.1	3H	3H
	4H	12.9	13.4	13.3	13.7	14.1	13.1	13.5	13.5	13.9	14.2	4H	4H
	6H	15.2	15.6	15.6	16.0	16.3	15.3	15.7	15.7	16.0	16.4	6H	6H
	8H	16.6	16.9	17.0	17.3	17.7	16.7	17.0	17.1	17.4	17.8	8H	8H
	12H	18.0	18.3	18.4	18.7	19.1	18.2	18.4	18.6	18.8	19.3	12H	12H
8H	4H	13.8	14.1	14.2	14.5	14.9	13.9	14.2	14.3	14.6	15.0	8H	4H
	6H	16.3	16.6	16.8	17.0	17.4	16.4	16.6	16.8	17.0	17.5	6H	6H
	8H	17.8	18.0	18.3	18.5	18.9	17.9	18.1	18.4	18.6	19.0	8H	8H
	12H	19.5	19.7	20.0	20.1	20.6	19.6	19.8	20.1	20.2	20.7	12H	12H
12H	4H	14.0	14.3	14.5	14.7	15.1	14.1	14.4	14.6	14.8	15.3	12H	4H
	6H	16.7	16.9	17.2	17.3	17.8	16.7	16.9	17.2	17.4	17.8	6H	6H
	8H	18.3	18.4	18.8	18.9	19.4	18.4	18.5	18.9	19.0	19.5	8H	8H
Variation of the observer position for the luminaires distances S													
S = 1.0H		+0.2 / -0.2					+0.2 / -0.2						
S = 1.5H		+0.3 / -0.3					+0.3 / -0.3						
S = 2.0H		+0.5 / -0.6					+0.5 / -0.6						
Standard table Correction Summand		---					---						
Corrected Glare Indices referring to 750lm Total Luminous Flux													



DRIVER OPTIONS*		Black Foster Surface Remote 3	Black Foster Surface Remote 5	Black Foster Surface Remote 10	Black Foster Surface Remote 15
 NO DIM	0434-00-40	1 to 4	1 to 2	1	
	0434-01-43	1 to 6	1 to 3	1	1
 DIM DALI	0434-00-46	1 to 4	1 to 2	1	
	0434-01-25	1 to 6	1 to 3	1	1

220  
240 V~

\* Driver must be placed on remote



Fuente de luz (LED) reemplazable por un profesional autorizado  
 Replaceable (LED only) light source by an authorized professional.  
 Source lumineuse (LED) remplaçable par un professionnel agréé  
 Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato  
 Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado  
 Replaceable control gear by an authorized professional  
 Dispositif de commande remplaçable par un professionnel agréé  
 Alimentatore sostituibile da parte di un professionista autorizzato  
 Auswechselbares Betriebsgerät durch autorisierten Fachmann

INSTRUCCIONES PARA EL FINAL DE VIDA Y LA ELIMINACIÓN LOS COMPONENTES  
 INSTRUCTIONS ON END-OF-LIFE AND COMPONENT DISPOSAL  
 INSTRUCTIONS POUR LA GESTION DES COMPOSANTS EN FIN DE VIE ET LEUR MISE AU REBUT  
 ISTRUZIONI PER IL FINE VITA E LO SMALTIMENTO DEI COMPONENTI  
 ANWEISUNGEN ZUR ENTSORGUNG DER LEUCHTENKOMPONENTEN



Interrumpir la alimentación del aparato  
 Cut the power supply to the luminaire  
 Couper l'alimentation du luminaire  
 Interrompere l'alimentazione dell'apparecchio  
 Stromversorgung der Leuchte unterbrechen



Quitar la(s) fuente(s) de luz para el desecho  
 Remove light source(s) for disposal  
 Retirer la (les) source(s) lumineuse(s) pour l'élimination  
 Rimuovere la/le sorgente/e di luce per lo smaltimento  
 Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho  
 Remove the battery for decommissioning  
 Retirer la batterie pour sa mise au rebut  
 Rimuovere la batteria per la dismissione  
 Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho  
 Remove control gear for disposal  
 Retirer le dispositif de commande pour l'élimination  
 Rimuovere l'alimentatore per lo smaltimento  
 Betriebsgerät zur Entsorgung ausbauen

Enviar los materiales a un centro de recogida RAEE  
 Send the materials to a WEEE collection centre  
 Envoyer les matériaux dans une déchetterie DEEE  
 Inviare i materiali ad un centro di raccolta RAEE  
 Die Materialien in einem WEEE-Zentrum entsorgen

