





DIMENSIONS



ACCESSORIES



DRIVER OPTIONS



CONNECTOR IP67

Name	DARK M 48V WALL WASHER 1 4000K N
Reference	A5250112N
Color	Black
RAL	9005
Category	OUTDOOR

Type	LED
Gross luminous flux	675 lm
Colour temperature	4000 K
Chromatic stability	MacAdam Step 2
Colour Rendering Index	CRI > 90
Power	4,6 W
Efficacy	147 lm/W
LED lifespan	L90B10 > 55.000h

Lighting efficiency	37%
---------------------	-----

Power values of the system	5,88 W
Dimming	DALI - Push / WIFI
Electrical insulation class	III

Sealing	IP67
Impact resistance	IK08
Recess measurements	Ø92 mm
Outdoor Use	Yes
Maximum surface temperature	68°
Supported load	7000
Weight	0,95 g
Packaged weight	1,055 g
Packaging dimensions	155 x 137 x 124 mm
Units per package	1
Materials	Stainless Steel (AISI 304) / Aluminium / Glass-Transparent

PRODUCT

LIGHT SOURCE

LIGHTING FIXTURE | PHOTOMETRIC DATA


LIGHTING FIXTURE | ELECTRICAL DATA

OTHER DATA





Dark is a floor-recessed LED luminaire used together with elements that we wish to illuminate upwards, to be able to highlight their architectonic presence (structures, walls, trees, gardens, cornices, etc.). *** NOTE: Recessed box included

POLAR DIAGRAM

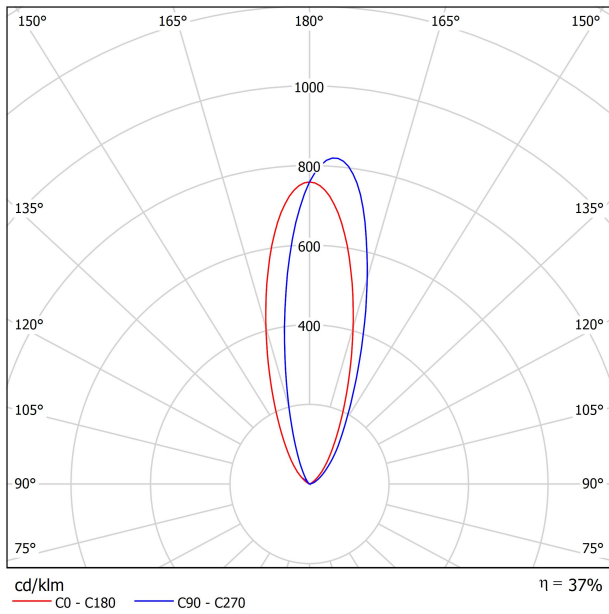



CONICAL DIAGRAM

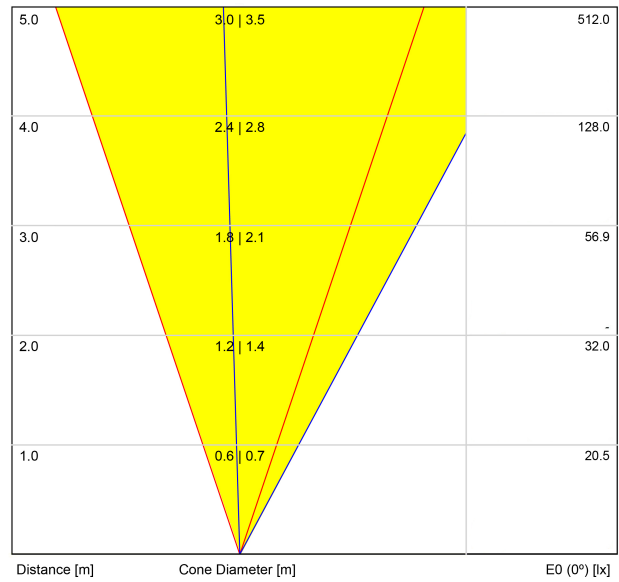




			P	D (A x B x C)
48V Power Supply	ON/OFF	0434-01-62	150W	350 x 30 x 18mm
				TO BE INSTALLED ON REMOTE
220 V~ 240				



			P	D (A x B x C)
Remote Constant Voltage Dimmer		0433-01-32	DALI/PUSH	181 x 42 x 20mm
		0434-01-64	WIFI	105 x 44 x 23mm
				TO BE INSTALLED ON REMOTE
24V				




DROP VOLTAGE TABLE

POWER (W)	CABLE SECTION (mm ²)	CABLE LENGTH (m)		
		<25	<50	<75
150	0,75	✓	✗	✗
	1,0	✓	✓	✗
	1,5	✓	✓	✓

IP67 CONNECTOR


ARKOSLIGHT®

OPTIONAL ACCESSORY

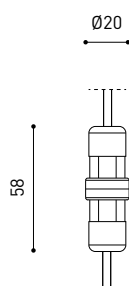

	PRODUCT
Model	Connector IP67
Reference	0434-01- 66 N
Category	Accessories

For cable Ø4,5 - 6,5mm | section ≤ 1,5mm²

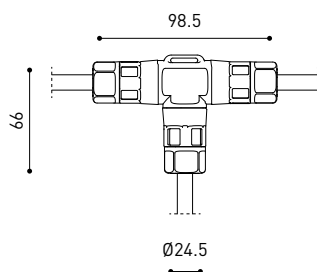

	PRODUCT
Model	Connector IP67 T-Shape
Reference	0434-01- 75 N
Category	Accessories

For cable Ø3,5 - 5,5mm | section ≤ 1,5mm²



Fuente de luz (LED) reemplazable por un profesional autorizado
 Replaceable (LED only) light source by an authorized professional.
 Source lumineuse (LED) remplaçable par un professionnel agréé
 Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato
 Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann




Equipo de control reemplazable por un profesional autorizado
 Replaceable control gear by an authorized professional
 Dispositif de commande remplaçable par un professionnel agréé
 Alimentatore sostituibile da parte di un professionista autorizzato
 Auswechselbares Betriebsgerät durch autorisierten Fachmann


INSTRUCCIONES PARA EL FINAL DE VIDA Y LA ELIMINACIÓN LOS COMPONENTES
 INSTRUCTIONS ON END-OF-LIFE AND COMPONENT DISPOSAL
 INSTRUCTIONS POUR LA GESTION DES COMPOSANTS EN FIN DE VIE ET LEUR MISE AU REBUT
 ISTRUZIONI PER IL FINE VITA E LO SMALTIMENTO DEI COMPONENTI
 ANWEISUNGEN ZUR ENTSORGUNG DER LEUCHTENKOMPONENTEN



Interrumpir la alimentación del aparato
 Cut the power supply to the luminaire
 Couper l'alimentation du luminaire
 Interrompere l'alimentazione dell'apparecchio
 Stromversorgung der Leuchte unterbrechen

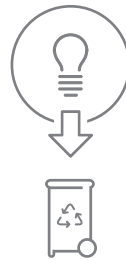

Quitar la(s) fuente(s) de luz para el desecho
 Remove light source(s) for disposal
 Retirer la (les) source(s) lumineuse(s) pour l'élimination
 Rimuovere la/le sorgente/e di luce per lo smaltimento
 Lichtquelle(n) zur Entsorgung entfernen

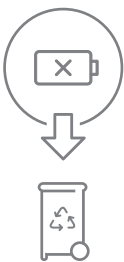

Quitar la batería para el desecho
 Remove the battery for decommissioning
 Retirer la batterie pour sa mise au rebut
 Rimuovere la batteria per la dismissione
 Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho
 Remove control gear for disposal
 Retirer le dispositif de commande pour l'élimination
 Rimuovere l'alimentatore per lo smaltimento
 Betriebsgerät zur Entsorgung ausbauen

Enviar los materiales a un centro de recogida RAEE
 Send the materials to a WEEE collection centre
 Envoyer les matériaux dans une déchetterie DEEE
 Inviare i materiali ad un centro di raccolta RAEE
 Die Materialien in einem WEEE-Zentrum entsorgen

