



#### DIMENSIONS



#### ACCESSORIES



DRIVER OPTIONS



CONNECTOR IP67

Name	DARK M 48V WALL WASHER 3 4000K OX
Reference	A52503120X
Color	Textured oxidon
Category	OUTDOOR

#### LIGHT SOURCE

Type	LED
Gross luminous flux	1290 lm
Colour temperature	4000 K
Chromatic stability	MacAdam Step 2
Colour Rendering Index	CRI>90
Power	10,5 W
Efficacy	123 lm/W
LED lifespan	L90B10 >55.000h

#### LIGHTING FIXTURE | PHOTOMETRIC DATA

Lighting efficiency	37%
---------------------	-----

#### LIGHTING FIXTURE | ELECTRICAL DATA

Power values of the system	11,58 W
Dimming	DALI - Push / WIFI
Electrical insulation class	III


#### OTHER DATA

Sealing	IP67
Impact resistance	IK08
Recess measurements	Ø92 mm
Outdoor Use	Yes
Maximum surface temperature	68°
Supported load	7000
Weight	0,95 g
Packaged weight	1,055 g
Packaging dimensions	155 x 137 x 124 mm
Units per package	1
Materials	Stainless Steel (AISI 304) / Aluminium / Glass-Transparent




Dark is a floor-recessed LED luminaire used together with elements that we wish to illuminate upwards, to be able to highlight their architectonic presence (structures, walls, trees, gardens, cornices, etc.). \*\*\* NOTE: Recessed box included

POLAR DIAGRAM

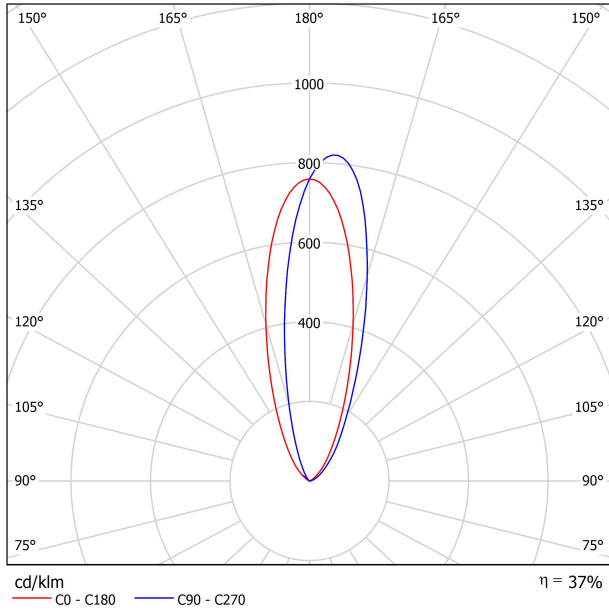


CONICAL DIAGRAM

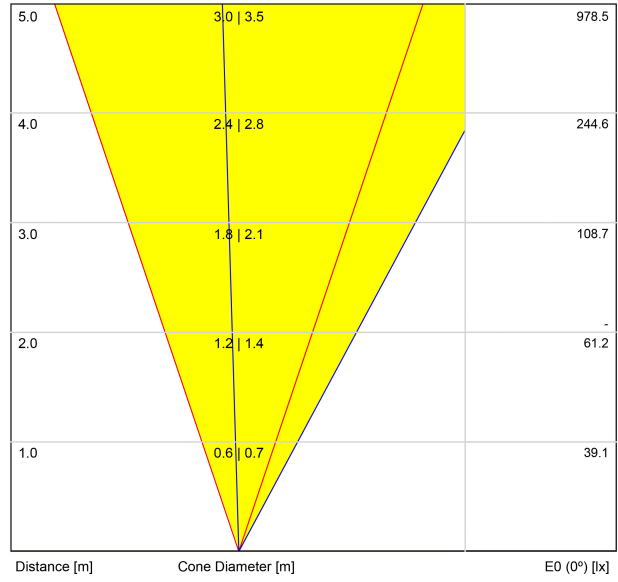



			P	D (A x B x C)
<b>48V Power Supply</b>	ON/OFF	<b>0434-01-62</b>	150W	350 x 30 x 18mm
220 V~ 240				TO BE INSTALLED ON REMOTE



			P	D (A x B x C)
<b>Remote Constant Voltage Dimmer</b>		<b>0433-01-32</b>	DALI/PUSH	181 x 42 x 20mm
		<b>0434-01-64</b>	WIFI	105 x 44 x 23mm
24V				TO BE INSTALLED ON REMOTE



### DROP VOLTAGE TABLE

POWER (W)	CABLE SECTION (mm <sup>2</sup> )	CABLE LENGTH (m)		
		<25	<50	<75
150	0,75	✓	✗	✗
	1,0	✓	✓	✗
	1,5	✓	✓	✓

# IP67 CONNECTOR

ARKOSLIGHT®

OPTIONAL ACCESSORY



	PRODUCT
Model	Connector IP67
Reference	0434-01- 66   N
Category	Accessories

For cable Ø4,5 - 6,5mm | section ≤ 1,5mm<sup>2</sup>



	PRODUCT
Model	Connector IP67 T-Shape
Reference	0434-01- 75   N
Category	Accessories

For cable Ø3,5 - 5,5mm | section ≤ 1,5mm<sup>2</sup>



Fuente de luz (LED) reemplazable por un profesional autorizado

Replaceable (LED only) light source by an authorized professional.

Source lumineuse (LED) remplaçable par un professionnel agréé

Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato

Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado

Replaceable control gear by an authorized professional

Dispositif de commande remplaçable par un professionnel agréé

Alimentatore sostituibile da parte di un professionista autorizzato

Auswechselbares Betriebsgerät durch autorisierten Fachmann

INSTRUCCIONES PARA EL FINAL DE VIDA Y LA ELIMINACIÓN LOS COMPONENTES  
 INSTRUCTIONS ON END-OF-LIFE AND COMPONENT DISPOSAL  
 INSTRUCTIONS POUR LA GESTION DES COMPOSANTS EN FIN DE VIE ET LEUR MISE AU REBUT  
 ISTRUZIONI PER IL FINE VITA E LO SMALTIMENTO DEI COMPONENTI  
 ANWEISUNGEN ZUR ENTSORGUNG DER LEUCHTENKOMPONENTEN



Interrumpir la alimentación del aparato  
 Cut the power supply to the luminaire  
 Couper l'alimentation du luminaire  
 Interrompere l'alimentazione dell'apparecchio  
 Stromversorgung der Leuchte unterbrechen



Quitar la(s) fuente(s) de luz para el desecho  
 Remove light source(s) for disposal  
 Retirer la (les) source(s) lumineuse(s) pour l'élimination  
 Rimuovere la/le sorgente/e di luce per lo smaltimento  
 Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho  
 Remove the battery for decommissioning  
 Retirer la batterie pour sa mise au rebut  
 Rimuovere la batteria per la dismissione  
 Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho  
 Remove control gear for disposal  
 Retirer le dispositif de commande pour l'élimination  
 Rimuovere l'alimentatore per lo smaltimento  
 Betriebsgerät zur Entsorgung ausbauen



Enviar los materiales a un centro de recogida RAEE  
 Send the materials to a WEEE collection centre  
 Envoyer les matériaux dans une déchetterie DEEE  
 Inviare i materiali ad un centro di raccolta RAEE  
 Die Materialien in einem WEEE-Zentrum entsorgen

