

Black Foster Custom  
Module


ARKOSLIGHT



Dimensiones



Accesorios

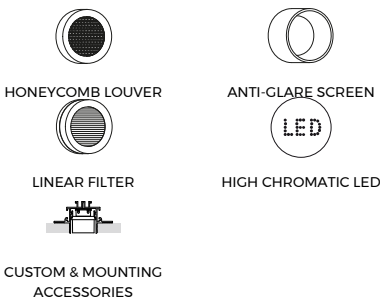

Premios



PRODUCTO

|            |                                                        |
|------------|--------------------------------------------------------|
| Nombre     | BLACK FOSTER CUSTOM MODULE COCO SPOT DIM DALI 4000K NT |
| Referencia | A5430212NT                                             |
| Color      | Negro Texturado                                        |
| RAL        | 9005                                                   |
| Categoría  | CUSTOM SYSTEMS                                         |

FUENTE DE LUZ

|                                  |                 |
|----------------------------------|-----------------|
| Tipo                             | LED             |
| Flujo luminoso                   | 1340 lm         |
| Temperatura de color             | 4000 K          |
| Estabilidad cromática            | MacAdam Step 2  |
| Índice de reproducción cromática | CRI>90          |
| Potencia                         | 8,7 W           |
| Eficacia                         | 154 lm/W        |
| Horas de vida del LED            | L80B10 >66.000h |
| Eficiencia energética            | E               |

LUMINARIA | DATOS FOTOMÉTRICOS

|                       |     |
|-----------------------|-----|
| Eficiencia lumínica   | 87% |
| Ángulo del haz de luz | 20° |

LUMINARIA | DATOS ELÉCTRICOS

|                              |          |
|------------------------------|----------|
| Driver                       | Incluido |
| Potencia del sistema         | 10,00 W  |
| Tensión                      | 48Vdc    |
| Regulación                   | DALI     |
| Clase de seguridad eléctrica | II       |

OTROS DATOS

|                       |                                                             |
|-----------------------|-------------------------------------------------------------|
| Estanqueidad          | IP20                                                        |
| Control inalámbrico   | Consultar                                                   |
| Ángulo de basculación | 90°                                                         |
| Ángulo de giro        | 360°                                                        |
| Tipo de carril        | Black Foster Track                                          |
| Peso                  | 290 g                                                       |
| Peso con embalaje     | 375 g                                                       |
| Dimensiones embalaje  | 214x168x57 mm                                               |
| Unidades por embalaje | 1                                                           |
| Materiales            | Aluminio / Acrilonitrilo Butadieno Estireno / Policarbonato |




Una solución liviana y poderosa. Coco es un foco con una distribución de la luz cualitativa y uniforme. Ofrece gran libertad de emisiones con cuatro ángulos de apertura -flood, médium, spot y superspot- una rotación de 360° y una inclinación de 90°. Con una excepcional relación lm/W, se pueden incorporar distintos accesorios: antil glare honeycomb y antil glare screen, que reducen el deslumbramiento para favorecer el confort visual, y el linear filter que fija una distribución lumínica lineal. Coco invita a interactuar con la luz mediante una versión con regulador integrado, que permite regular la intensidad deseada en cada luminaria. Su versión tunable white replica los efectos de la luz natural mediante la regulación de la intensidad y de la temperatura de color.

Diagrama polar



Diagrama cónico

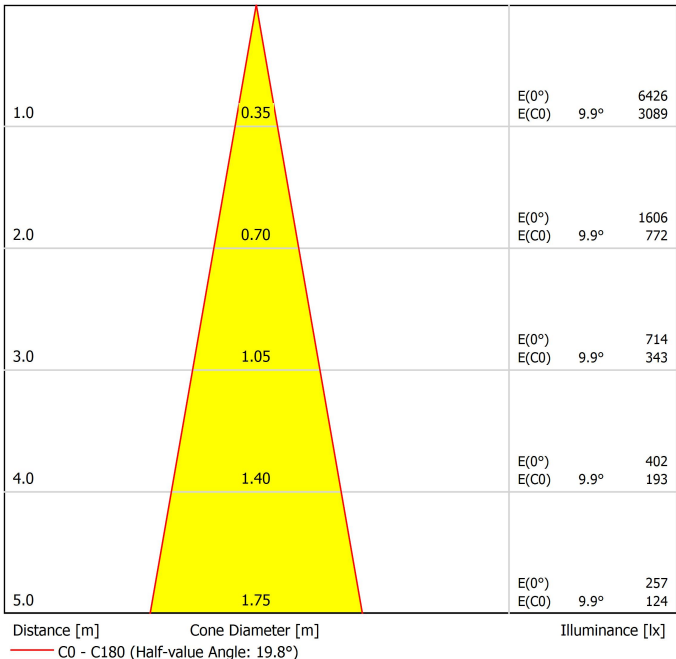



| PRODUCT                  |                             |
|--------------------------|-----------------------------|
| Model                    | Anti-glare Honeycomb Louver |
| Reference                | A498-90-00   WT   NT        |
| Category                 | Accessories                 |
| NO SE VENDE POR SEPARADO |                             |



Rejilla tipo panal antideslumbrante

Accesorio compuesto por una rejilla en forma de panal que controla el haz de luz, reduce el deslumbramiento y protege la visión directa de la fuente luminosa.



|                          |                      |
|--------------------------|----------------------|
| PRODUCT                  |                      |
| Model                    | Anti-glare Screen    |
| Reference                | A498-90-01   WT   NT |
| Category                 | Accessories          |
| NO SE VENDE POR SEPARADO |                      |



**Pantalla antideslumbramiento**

Accesorio diseñado para reducir el deslumbramiento directo, especialmente en luminarias con ópticas visibles, y mejorar el confort visual bloqueando ángulos de emisión incómodos.



| PRODUCT   |                      |
|-----------|----------------------|
| Model     | Linear Filter        |
| Reference | A498-90-02   WT   NT |
| Category  | Accessories          |

NO SE VENDE POR SEPARADO | INDICADO PARA BEAM ≤ 34º

Filtro lineal

Convierte el haz de luz circular en una forma lineal. Ideal para aplicaciones que requieren una distribución precisa y lineal de la luz, permitiendo focalizar sobre superficies específicas o evitar el efecto de «manchas de luz» en espacios amplios.

| Vivid Model<br>Colour Temperature                                                                     | 2700K | 3000K | 3500K | 4000K | Light Pink |
|-------------------------------------------------------------------------------------------------------|-------|-------|-------|-------|------------|
|  Reading             |       |       | ●     | ●     |            |
|  Fruits & Vegetables |       | ●     | ●     |       |            |
|  Bakery              | ●     |       |       |       |            |
|  Retail              |       | ●     | ●     |       |            |
|  Cosmetics           |       |       | ●     | ●     |            |
|  Meat                |       |       |       |       | ●          |
|  Fish                |       |       |       | ●     |            |
|  Seafood            |       |       |       | ●     | ●          |

## LED de alta cromaticidad

### Para presentación comercial de producto.

Arkoslight ofrece en algunos de sus productos la posibilidad de incorporar un LED especial, orientado a potenciar la promoción visual de bienes y productos con fines comerciales.

Se trata de un LED de alta cromaticidad, seleccionado para realzar los tonos que favorecen una percepción psicológica positiva del objeto iluminado.

Esta fuente de luz proporciona una paleta cromática más atractiva e intensa que la de un LED convencional. Esto se logra mediante una configuración específica del LED bajo un "parámetro especial de saturación", que permite que los colores y texturas de los objetos se perciban de forma más viva dentro del espectro visible.

Para ello, se eligen cuidadosamente el diodo y su fósforo de recubrimiento en función de cada aplicación.

# Black Foster Custom System components

# ARKOSLIGHT

Black Foster Custom System is a modular 48V lighting system designed to create tailored lighting setups by combining tracks, connectors, lighting modules, and accessories. Ideal for architectural and retail projects that demand flexibility, minimalist design, and high performance.

To configure the Black Foster Custom System, you'll need to combine the following components:

- 1. Tracks – Available in surface, trimless, or suspended versions (using suspension accessories with the surface track), they form the structural and electrical base of the system.
- 2. Connectors & Power Supply – Join track sections and provide 48V power input.
- 3. Accessories – Including end caps, joining elements, mounting accessories, and alternative installation parts to secure and finish the system.




## Track Options

Choose the track version required for your project configuration.

### Surface

|                                |                       |
|--------------------------------|-----------------------|
| BLACK FOSTER Custom Surface 1m | A452-01-00-   NT   WT |
| BLACK FOSTER Custom Surface 2m | A452-02-00-   NT   WT |
| BLACK FOSTER Custom Surface 3m | A452-03-00-   NT   WT |



|                                     |                       |
|-------------------------------------|-----------------------|
| BLACK FOSTER Custom Surface L-Joint | A452-04-00-   NT   WT |
| BLACK FOSTER Custom Surface T-Joint | A452-05-00-   NT   WT |
| BLACK FOSTER Custom Surface X-Joint | A452-06-00-   NT   WT |

L-JOINT



T-JOINT




X-JOINT



### Trimless

|                                 |                 |
|---------------------------------|-----------------|
| BLACK FOSTER Custom Trimless 1m | A458-01-00-   N |
| BLACK FOSTER Custom Trimless 2m | A458-02-00-   N |
| BLACK FOSTER Custom Trimless 3m | A458-03-00-   N |



|                                      |                 |
|--------------------------------------|-----------------|
| BLACK FOSTER Custom Trimless L-Joint | A458-04-00-   N |
|--------------------------------------|-----------------|



|                                                            |            |
|------------------------------------------------------------|------------|
| BLACK FOSTER Custom Trimless Plaster Installation Guard 1m | A458-05-00 |
|------------------------------------------------------------|------------|



TRIMLESS INSTALLATION GUIDE  
<https://youtu.be/tgGsQdaYe-w>



COLOUR | NT ■ RAL 9005 | WT □ RAL 9016 | N ■ RAL 9005 |

Electrical connections are not included. Please choose the required components from the Connectors section.

Calle N, s/n - Pol. Ind. El Oliveral  
46394 Ribarroja del Turia-Valencia (Spain)  
info@arkoslight.com - www.arkoslight.com



Complementary track accessories

Use end caps, joiners, and gap covers to connect, close, and cleanly finish your track setup.

Surface

|                             |             |   |   |
|-----------------------------|-------------|---|---|
| BLACK FOSTER Custom Surface |             |   |   |
| End                         | A452-00-03- | N | W |



|                             |             |   |   |
|-----------------------------|-------------|---|---|
| BLACK FOSTER Custom Surface |             |   |   |
| End Feed                    | A452-00-04- | N | W |



|                             |            |  |  |
|-----------------------------|------------|--|--|
| BLACK FOSTER Custom Surface |            |  |  |
| Straight Joiner             | A452-00-05 |  |  |



Trimless

|                                  |   |  |  |
|----------------------------------|---|--|--|
| BLACK FOSTER Custom Trimless End |   |  |  |
| A458-00-01-                      | N |  |  |
| Cover Thickness = 2 mm.          |   |  |  |



|                                       |   |  |  |
|---------------------------------------|---|--|--|
| BLACK FOSTER Custom Trimless End Feed |   |  |  |
| A458-00-02-                           | N |  |  |
| Cover Thickness = 2 mm.               |   |  |  |



|                              |  |  |  |
|------------------------------|--|--|--|
| BLACK FOSTER Straight Joiner |  |  |  |
| A317-00-06                   |  |  |  |



For all tracks

|                                   |             |   |       |
|-----------------------------------|-------------|---|-------|
|                                   |             |   | L     |
| BLACK FOSTER Custom Cover Gap 250 | A452-00-01- | N | 250mm |
| BLACK FOSTER Custom Cover Gap 500 | A452-00-02- | N | 500mm |



Connector options

Connectors are required to provide electrical continuity between tracks, ensuring an uninterrupted 48V flow.

Surface

|                        |   |  |  |
|------------------------|---|--|--|
| Live-End Connector 48V |   |  |  |
| A338-00-01-            | N |  |  |



|                       |   |  |  |
|-----------------------|---|--|--|
| Central Connector 48V |   |  |  |
| A338-00-02-           | N |  |  |



|                       |   |  |  |
|-----------------------|---|--|--|
| L-Joint Connector 48V |   |  |  |
| A338-00-12-           | N |  |  |



|                       |   |  |  |
|-----------------------|---|--|--|
| T-Joint Connector 48V |   |  |  |
| A450-00-07-           | N |  |  |



|                       |   |  |  |
|-----------------------|---|--|--|
| X-Joint Connector 48V |   |  |  |
| A450-00-08-           | N |  |  |



Trimless

|                        |   |  |  |
|------------------------|---|--|--|
| Live-End Connector 48V |   |  |  |
| A338-00-01-            | N |  |  |



|                       |   |  |  |
|-----------------------|---|--|--|
| Central Connector 48V |   |  |  |
| A338-00-02-           | N |  |  |



|                       |   |  |  |
|-----------------------|---|--|--|
| L-Joint Connector 48V |   |  |  |
| A338-00-12-           | N |  |  |



COLOUR | N ■ RAL 9005 | W □ RAL 9016 |

Power Supply Options

Select the appropriate power feed to deliver 48V to the system based on your track layout and installation type.

For all tracks

| Constant Voltage<br>LED POWER SUPPLY | P    | V   | D (A x B x C)   |
|--------------------------------------|------|-----|-----------------|
| 0434-01-61*   N                      | 100W | 48V | 298 x 19 x 16mm |
| 0434-01-62                           | 150W | 48V | 350 x 30 x 18mm |
| 0434-01-80                           | 250W | 48V | 400 x 40 x 22mm |

220  
240 V~ | \*To be installed inside the track.



DROP VOLTAGE TABLE

| POWER (W) | CABLE SECTION (mm²) | CABLE LENGTH (m) |    |    |    |
|-----------|---------------------|------------------|----|----|----|
|           |                     | 5                | 10 | 20 | 30 |
|           |                     | TRACK LENGTH (m) |    |    |    |
| 100       | 0,75                | 50               | 50 | X  | X  |
|           | 1,5                 | 50               | 50 | 40 | 25 |
| 150       | 0,75                | 40               | 15 | X  | X  |
|           | 1,5                 | 50               | 40 | 20 | X  |
| 250       | 0,75                | 20               | X  | X  | X  |
|           | 1,5                 | 35               | 20 | X  | X  |

Connection diagrams:

Surface



Remote driver installation



Integrated driver installation

Trimless



Remote driver installation



Integrated driver installation


Suspension



Aside box



Remote driver installation

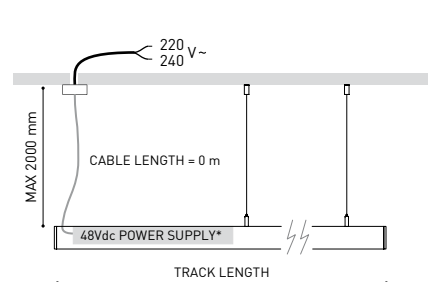

Integrated driver installation

COLOUR | N ■ RAL 9005 |

## Other accessories

### Suspension components

For a suspended configuration, use surface components together with the following accessories:

#### Black Foster Suspension Kit (2 units)

A450-00-09- | NT | WT |

Suggested mounting accessories quantities:  
1000mm - 2 Pcs.  
2000mm - 2 Pcs.  
3000mm - 3 Pcs.



For aside box installation replace the power supply:

#### Wired Power Supply Case 48V

A338-00-25- | NT | WT | 150W NO DIM

A338-00-26- | NT | WT | 150W DIM

220  
240 V~  
INCL



Required for remote or integrated driver installation:

#### Suspension Feed Kit 48V

A338-00-16- | N | W | NO DIM

A338-00-17- | N | W | DIM

For remote power supply



A338-00-27- | N | W | NO DIM

A338-00-28- | N | W | DIM

For power supply inside the track

### Wire trimless accessories

For installing the suspension system cleanly and discreetly — with no visible ceiling boxes or mounting elements.

#### FEED

##### Mains Trimless\*

A023-00-01- | W | N | NO DIM

##### Mains Thick Trimless\*

A023-00-02- | W | N | DIM



#### FASTENING

##### Steel Cable Trimless\*

A023-00-05- | W | N |



\* As many pieces as needed ACCORDING to your product

### Trimless mounting accessories

These accessories offer different options for installing trimless track systems according to ceiling type and project needs.

#### Track Fixation Kit

A219-21-06- | B |



#### Track Flush Ceiling Kit

A219-22-06- | B |



#### Track Clamp Kit for M6 ROD

A219-21-21- | B |



#### Track Suspension Kit

A219-21-10- | B |



#### SUGGESTED MOUNTING ACCESSORIES QUANTITIES

1000 mm - 2 Pcs  
2000 mm - 2 Pcs  
3000 mm - 3 Pcs

#### TRIMLESS INSTALLATION GUIDE

<https://youtu.be/tgGsQdaYe-w>



#### PRODUCT CONFIGURATOR

Use our online configurator to design your own custom product layout. The tool will guide you through the process and automatically calculate the required drivers and accessories.

[Start your configuration →](#)

COLOUR | NT ■ RAL 9005 | WT □ RAL 9016 | N ■ RAL 9005 | W □ RAL 9016 | B □ RAL 9016 |



Fuente de luz (LED) reemplazable por un profesional autorizado

Replaceable (LED only) light source by an authorized professional.

Source lumineuse (LED) remplaçable par un professionnel agréé

Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato

Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado

Replaceable control gear by an authorized professional

Dispositif de commande remplaçable par un professionnel agréé

Alimentatore sostituibile da parte di un professionista autorizzato

Auswechselbares Betriebsgerät durch autorisierten Fachmann

## Instrucciones para el final de vida y la eliminación de los componentes:

### Instructions on end-of-life and component disposal:

### Instructions pour la gestion des composants en fin de vie et leur mise au rebut :

### Istruzioni per il fine vita e lo smaltimento dei componenti:

### Anweisungen zur entsorgung der Leuchtenkomponenten:



Interrumpir la alimentación del aparato  
Cut the power supply to the luminaire  
Couper l'alimentation du luminaire  
Interrompere l'alimentazione dell'apparecchio  
Stromversorgung der Leuchte unterbrechen



Quitar la(s) fuente(s) de luz para el desecho  
Remove light source(s) for disposal  
Retirer la (les) source(s) lumineuse(s) pour l'élimination  
Rimuovere la/le sorgente/e di luce per lo smaltimento  
Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho  
Remove the battery for decommissioning  
Retirer la batterie pour sa mise au rebut  
Rimuovere la batteria per la dismissione  
Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho  
Remove control gear for disposal  
Retirer le dispositif de commande pour l'élimination  
Rimuovere l'alimentatore per lo smaltimento  
Betriebsgerät zur Entsorgung ausbauen

Enviar los materiales a un centro de recogida RAEE  
Send the materials to a WEEE collection centre  
Envoyer les matériaux dans une déchetterie DEEE  
Inviare i materiali ad un centro di raccolta RAEE  
Die Materialien in einem WEEE-Zentrum entsorgen

