




DIMENSIONS



AWARDS

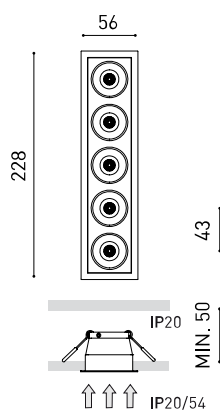

Name	BLACK FOSTER REC IP54 5 FLOOD DIM PUSH 2700K N
Reference	A5464020N
Color	Black
RAL	9005
Category	CEILING RECESSED

Type	LED
Gross luminous flux	950 lm
Colour temperature	2700 K
Chromatic stability	MacAdam Step 3
Colour Rendering Index	CRI>90
Power	10,5 W
Current	700 mA
Efficacy	90 lm/W
LED lifespan	L90B10 >102.000h

Lighting efficiency	86%
Light beam angle	38°

Driver	Included - Connected
Power values of the system	13,11 W
Frequency	50/60 Hz
Dimming	Push
Electrical insulation class	□

Sealing	IP54
Wireless control	Please Consult
Emergency power supply	Please Consult
Weight	460 g
Packaged weight	585 g
Packaging dimensions	253 x 98 x 74 mm
Materials	Aluminium / Acrylonitrile Butadiene Styrene

PRODUCT

LIGHT SOURCE

LIGHTING FIXTURE | PHOTOMETRIC DATA


LIGHTING FIXTURE | ELECTRICAL DATA

OTHER DATA




Black Foster is the product that transfers the claimed effect "The Invisible Black" to a recessed-isolated lineal luminary; also available in trimless version. If we take a closer view to the recessed model, its bezel is so thin than when lighted up, it is unperceived; offering an aesthetic of "visual trimless". Black Foster stands out for its refinement, its visual comfort and for almost completely hide the source of light from the human eye range.

POLAR DIAGRAM

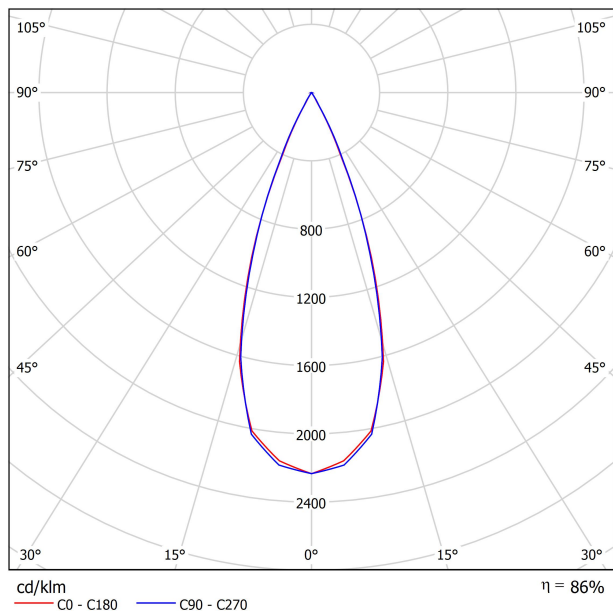

CONICAL DIAGRAM

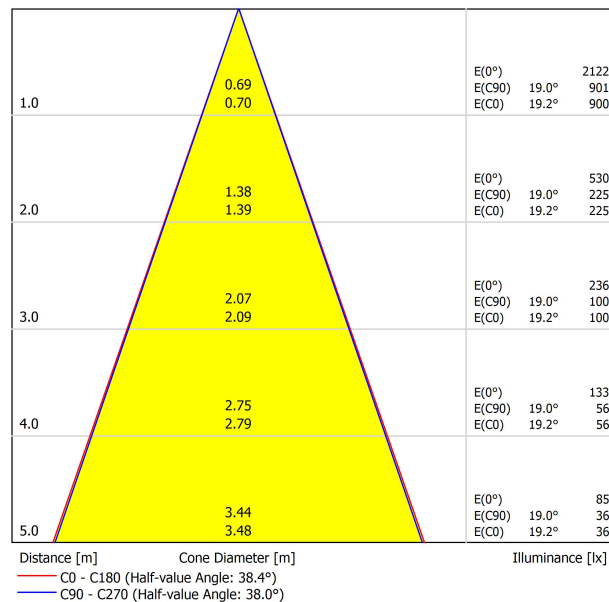

UGR

Glare Evaluation According to UGR												
		70	70	50	50	30	70	70	50	50	30	30
p Ceiling		50 <td>30</td> <td>50</td> <td>30</td> <td>30</td> <td>50</td> <td>30</td> <td>50</td> <td>30</td> <td>30</td> <td>30</td>	30	50	30	30	50	30	50	30	30	30
p Walls		20	20	20	20	20	20	20	20	20	20	20
p Floor		20	20	20	20	20	20	20	20	20	20	20
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
		2H	3H	4H	6H	8H	12H	2H	3H	4H	6H	8H
2H	2H	-14.0	-13.4	-13.8	-13.2	-13.0	-14.9	-14.3	-14.7	-14.1	-13.9	-13.9
	3H	-7.7	-7.1	-7.4	-6.9	-6.7	-7.6	-7.0	-7.3	-6.8	-6.5	-6.5
	4H	-4.2	-3.6	-3.9	-3.4	-3.1	-3.6	-3.1	-3.4	-2.9	-2.6	-2.6
	6H	-0.6	-0.1	-0.2	0.2	0.5	-0.2	0.3	0.1	0.6	0.9	0.9
	8H	1.3	1.8	1.6	2.1	2.4	1.6	2.1	1.9	2.4	2.7	2.7
4H	12H	3.3	3.7	3.6	4.1	4.4	3.6	4.1	4.0	4.4	4.7	4.7
	2H	-11.4	-10.9	-11.1	-10.6	-10.4	-11.8	-11.3	-11.5	-11.0	-10.8	-10.8
	3H	-5.5	-5.0	-5.1	-4.7	-4.4	-5.3	-4.8	-5.0	-4.5	-4.2	-4.2
	4H	-2.1	-1.7	-1.7	-1.3	-1.0	-1.6	-1.2	-1.2	-0.9	-0.5	-0.5
	6H	1.5	1.8	1.9	2.2	2.6	1.8	2.1	2.2	2.5	2.9	2.9
8H	8H	3.4	3.7	3.8	4.0	4.4	3.6	3.9	4.1	4.3	4.7	4.7
	12H	5.4	5.7	5.9	6.1	6.5	5.7	6.0	6.2	6.4	6.8	6.8
	4H	-0.5	-0.2	-0.1	0.2	0.6	-0.2	0.1	0.2	0.4	0.8	0.8
	6H	3.1	3.3	3.6	3.8	4.2	3.3	3.5	3.8	4.0	4.4	4.4
	8H	5.1	5.3	5.6	5.7	6.2	5.3	5.5	5.8	5.9	6.4	6.4
12H	12H	7.3	7.4	7.8	7.9	8.4	7.5	7.7	8.0	8.1	8.6	8.6
	4H	0.0	0.2	0.4	0.6	1.1	0.2	0.5	0.7	0.9	1.3	1.3
	6H	3.7	3.9	4.2	4.3	4.8	3.9	4.1	4.4	4.5	5.0	5.0
8H	5.8	5.9	6.3	6.4	6.9	6.0	6.1	6.4	6.6	7.1	7.1	
Variation of the observer position for the luminaire distances S												
S = 1.0H		+0.9 / -0.3					+1.3 / -0.4					
S = 1.5H		+1.9 / -0.6					+2.7 / -0.7					
S = 2.0H		+3.1 / -0.8					+4.2 / -1.0					
Standard table		---					---					
Correction		---					---					
Summand		---					---					
Corrected Glare Indices referring to 950lm Total Luminous Flux												



Fuente de luz (LED) reemplazable por un profesional autorizado

Replaceable (LED only) light source by an authorized professional.

Source lumineuse (LED) remplaçable par un professionnel agréé

Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato

Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado

Replaceable control gear by an authorized professional

Dispositif de commande remplaçable par un professionnel agréé

Alimentatore sostituibile da parte di un professionista autorizzato

Auswechselbares Betriebsgerät durch autorisierten Fachmann

INSTRUCCIONES PARA EL FINAL DE VIDA Y LA ELIMINACIÓN LOS COMPONENTES
INSTRUCTIONS ON END-OF-LIFE AND COMPONENT DISPOSAL
INSTRUCTIONS POUR LA GESTION DES COMPOSANTS EN FIN DE VIE ET LEUR MISE AU REBUT
ISTRUZIONI PER IL FINE VITA E LO SMALTIMENTO DEI COMPONENTI
ANWEISUNGEN ZUR ENTSORGUNG DER LEUCHTENKOMPONENTEN



Interrumpir la alimentación del aparato
Cut the power supply to the luminaire
Couper l'alimentation du luminaire
Interrompere l'alimentazione dell'apparecchio
Stromversorgung der Leuchte unterbrechen



Quitar la(s) fuente(s) de luz para el desecho
Remove light source(s) for disposal
Retirer la (les) source(s) lumineuse(s) pour l'élimination
Rimuovere la/le sorgente/e di luce per lo smaltimento
Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho
Remove the battery for decommissioning
Retirer la batterie pour sa mise au rebut
Rimuovere la batteria per la dismissione
Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho
Remove control gear for disposal
Retirer le dispositif de commande pour l'élimination
Rimuovere l'alimentatore per lo smaltimento
Betriebsgerät zur Entsorgung ausbauen

Enviar los materiales a un centro de recogida RAEE
Send the materials to a WEEE collection centre
Envoyer les matériaux dans une déchetterie DEEE
Inviare i materiali ad un centro di raccolta RAEE
Die Materialien in einem WEEE-Zentrum entsorgen

