





Dimensiones

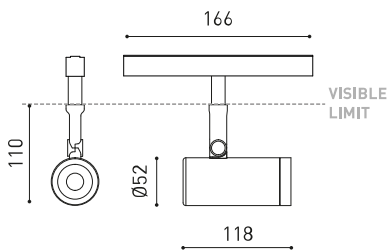

Accesorios

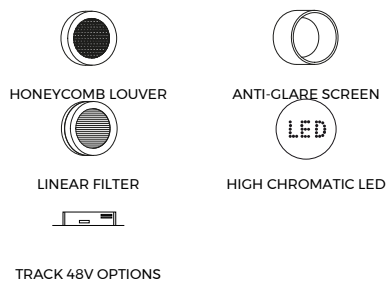

PRODUCTO

|            |                                         |
|------------|-----------------------------------------|
| Nombre     | COCO M 48V SUPER SPOT DIM DALI 4000K WT |
| Referencia | A5530202WT                              |
| Color      | Blanco Texturado                        |
| RAL        | 9016                                    |
| Categoría  | TRACK LIGHTS                            |

FUENTE DE LUZ

|                                  |                             |
|----------------------------------|-----------------------------|
| Tipo                             | LED                         |
| Flujo luminoso                   | 1400 lm                     |
| Temperatura de color             | 4000 K - Otros K, consultar |
| Estabilidad cromática            | MacAdam Step 2              |
| Índice de reproducción cromática | CRI>90                      |
| Potencia                         | 8,7 W                       |
| Eficacia                         | 161 lm/W                    |
| Horas de vida del LED            | L80B10 >66.000h             |
| Eficiencia energética            | E                           |

LUMINARIA | DATOS FOTOMÉTRICOS

|                       |     |
|-----------------------|-----|
| Eficiencia lumínica   | 67% |
| Ángulo del haz de luz | 13° |

LUMINARIA | DATOS ELÉCTRICOS

|                              |                             |
|------------------------------|-----------------------------|
| Potencia del sistema         | 10,00 W                     |
| Tensión                      | 48Vdc                       |
| Regulación                   | DALI - Otros DIM, consultar |
| Clase de seguridad eléctrica | II                          |

OTROS DATOS

|                       |                                                             |
|-----------------------|-------------------------------------------------------------|
| Estanqueidad          | IP20                                                        |
| Control inalámbrico   | Consultar                                                   |
| Ángulo de basculación | 90°                                                         |
| Ángulo de giro        | 360°                                                        |
| Tipo de carril        | Track 48V                                                   |
| Peso                  | 370 g                                                       |
| Peso con embalaje     | 485 g                                                       |
| Dimensiones embalaje  | 244 x 185 x 68 mm                                           |
| Unidades por embalaje | 1                                                           |
| Materiales            | Aluminio / Acrilonitrilo Butadieno Estireno / Policarbonato |

Una solución liviana y poderosa. Coco es un foco con una distribución de la luz cualitativa y uniforme. Ofrece gran libertad de emisiones con cuatro ángulos de apertura -flood, médium, spot y superspot- una rotación de 360° y una inclinación de 90°. Con una excepcional relación lm/W, se pueden incorporar distintos accesorios: antil glare honeycomb y antil glare screen, que reducen el deslumbramiento para favorecer el confort visual, y el linear filter que fija una distribución lumínica lineal. Coco invita a interactuar con la luz mediante una versión con regulador integrado, que permite regular la intensidad deseada en cada luminaria. Su versión tunable white replica los efectos de la luz natural mediante la regulación de la intensidad y de la temperatura de color.

Diagrama polar


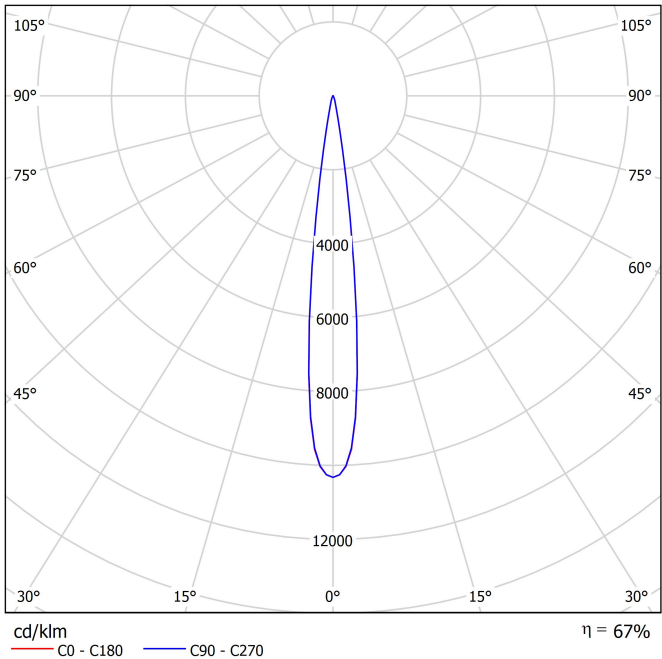


Diagrama cónico






| PRODUCT                  |                             |
|--------------------------|-----------------------------|
| Model                    | Anti-glare Honeycomb Louver |
| Reference                | A553-90-00   WT   NT        |
| Category                 | Accessories                 |
| NO SE VENDE POR SEPARADO |                             |

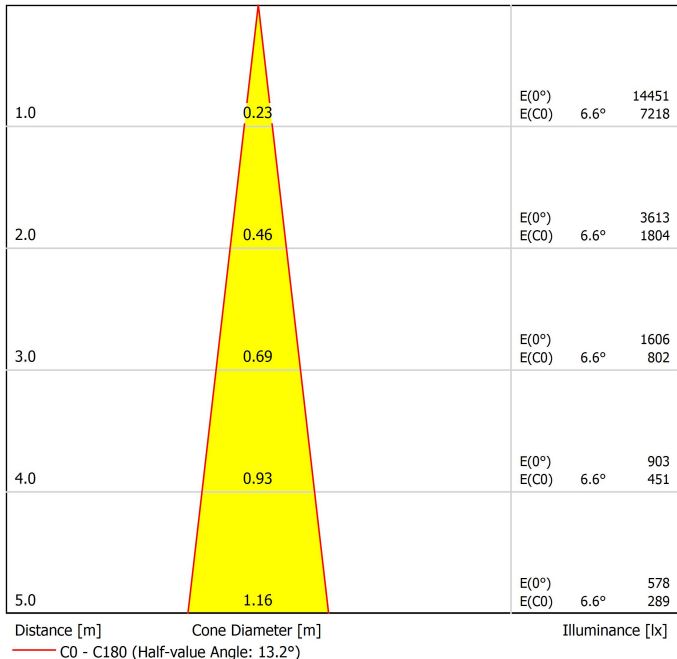

Rejilla tipo panal antideslumbrante

Accesorio compuesto por una rejilla en forma de panal que controla el haz de luz, reduce el deslumbramiento y protege la visión directa de la fuente luminosa.




| PRODUCT                  |                      |
|--------------------------|----------------------|
| Model                    | Anti-glare Screen    |
| Reference                | A553-90-01   WT   NT |
| Category                 | Accessories          |
| NO SE VENDE POR SEPARADO |                      |



Pantalla antideslumbramiento

Accesorio diseñado para reducir el deslumbramiento directo, especialmente en luminarias con ópticas visibles, y mejorar el confort visual bloqueando ángulos de emisión incómodos.



| PRODUCT   |                      |
|-----------|----------------------|
| Model     | Linear Filter        |
| Reference | A553-90-02   WT   NT |
| Category  | Accessories          |

NO SE VENDE POR SEPARADO | INDICADO PARA BEAM ≤ 32°

Filtro lineal

Convierte el haz de luz circular en una forma lineal. Ideal para aplicaciones que requieren una distribución precisa y lineal de la luz, permitiendo focalizar sobre superficies específicas o evitar el efecto de «manchas de luz» en espacios amplios.

| Vivid Model<br>Colour Temperature                                                                     | 2700K | 3000K | 3500K | 4000K | Light Pink |
|-------------------------------------------------------------------------------------------------------|-------|-------|-------|-------|------------|
|  Reading             |       |       | ●     | ●     |            |
|  Fruits & Vegetables |       | ●     | ●     |       |            |
|  Bakery              | ●     |       |       |       |            |
|  Retail              |       | ●     | ●     |       |            |
|  Cosmetics           |       |       | ●     | ●     |            |
|  Meat                |       |       |       |       | ●          |
|  Fish                |       |       |       | ●     |            |
|  Seafood            |       |       |       | ●     | ●          |

## LED de alta cromaticidad

### Para presentación comercial de producto.

Arkoslight ofrece en algunos de sus productos la posibilidad de incorporar un LED especial, orientado a potenciar la promoción visual de bienes y productos con fines comerciales.

Se trata de un LED de alta cromaticidad, seleccionado para realzar los tonos que favorecen una percepción psicológica positiva del objeto iluminado.

Esta fuente de luz proporciona una paleta cromática más atractiva e intensa que la de un LED convencional. Esto se logra mediante una configuración específica del LED bajo un "parámetro especial de saturación", que permite que los colores y texturas de los objetos se perciban de forma más viva dentro del espectro visible.

Para ello, se eligen cuidadosamente el diodo y su fósforo de recubrimiento en función de cada aplicación.

# Track 48V

# ARKOSLIGHT

48V track lighting systems are low-voltage lighting solutions based on electrified tracks. The track serves both as a physical structure and as a power carrier, allowing light modules to be placed and repositioned as needed, offering flexibility, safety, and energy efficiency. Ideal for projects that demand minimalist design, high performance, and adaptability.

To configure your 48V system, you'll need to combine the following components:

1. Tracks – Available in surface, trimless, surface short, suspended (using suspension accessories with the surface track), and indirect light versions. They form the structural and electrical base of the system.
2. Connectors & Power Supply – Ensure electrical continuity between track sections and provide the 48V power input.
3. Accessories – Including end caps, joiners, mounting elements, and optional installation accessories to complete and secure the setup.




## Track Options

Choose the track version required for your project configuration.

### Surface


|                      |                       |
|----------------------|-----------------------|
| TRACK 48V SURFACE 1m | A338-11-00-   NT   WT |
| TRACK 48V SURFACE 2m | A338-12-00-   NT   WT |
| TRACK 48V SURFACE 3m | A338-13-00-   NT   WT |



|                                        |                       |
|----------------------------------------|-----------------------|
| TRACK 48V SURFACE Corner 90° One Plane | A338-14-00-   NT   WT |
| TRACK 48V SURFACE T-Joint              | A338-15-00-   NT      |
| TRACK 48V SURFACE X-Joint              | A338-16-00-   NT      |




Corner 90° One Plane




Straight joiner included

T-Joint




Straight joiner included

X-Joint




Straight joiner included

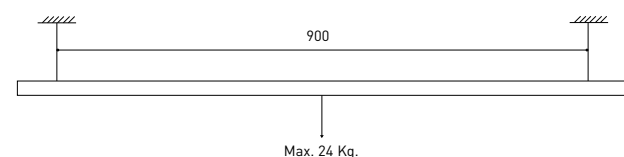

### Trimless

|                       |                      |
|-----------------------|----------------------|
| TRACK 48V TRIMLESS 1m | A338-01-00-   N   WT |
| TRACK 48V TRIMLESS 2m | A338-02-00-   N   WT |
| TRACK 48V TRIMLESS 3m | A338-03-00-   N   WT |

plasterboard ceiling, mandatory thickness 12,5mm. Recommended for installations where the profile can be installed before the false plasterboard ceiling.




|                                          |                      |
|------------------------------------------|----------------------|
| TRACK 48V TRIMLESS Corner 90° One Plane  | A338-06-00-   N   WT |
| TRACK 48V TRIMLESS Corner 90° Two Planes | A338-07-00-   N   WT |


plasterboard ceiling, mandatory thickness 12,5mm. Recommended for installations where the profile can be installed before the false plasterboard ceiling.



Corner 90° One Plane



Corner 90° Two Planes



TRIMLESS INSTALLATION GUIDE  
<https://youtu.be/tgGsQdaYe-w>



COLOUR | NT ■ RAL 9005 | WT □ RAL 9016 | N ■ RAL 9005 |

Electrical connections are not included. Please choose the required components from the Connectors section.

Complementary track accessories

Use end caps, joiners, and gap covers to connect, close, and cleanly finish your track setup.

Surface

End 48V

A338-00-06- | NT | WT |




End Feed 48V

A338-00-07- | NT | WT |



Surface Straight Joiner 48V


A338-00-11



Trimless

Trimless Straight Joiners (2 units) 48V


A338-00-05- | N | WT |



For all tracks

Cover Gap 1m 48V

A338-00-30- | N | W |




Connector options

Connectors are required to provide electrical continuity between tracks, ensuring an uninterrupted 48V flow.


Live-End Connector 48V

A338-00-01- | N |




Central Connector 48V

A338-00-02- | N |




T-Joint Connector 48V

A450-00-07- | N |



Wireless Control 48V


0434-01-31- | N | W | Casambi



Corner 90° Connector One Plane 48V


A338-00-24- | N | W |

\*Not suitable for trimless version




L-Joint Connector 48V

A338-00-12- | N |



X-Joint Connector 48V

A450-00-08- | N |



COLOUR | N ■ RAL 9005 | W □ RAL 9016 |



Power Supply Options





Select the appropriate power feed to deliver 48V to the system based on your track layout and installation type.

For all tracks

Constant Voltage  
LED POWER SUPPLY

|                     | P    | V   | D (A x B x C)   |
|---------------------|------|-----|-----------------|
| 0434-01-61*   N   W | 100W | 48V | 298 x 19 x 16mm |
| 0434-01-69*   N   W | 250W | 48V | 268 x 22 x 40mm |
| 0434-01-62          | 150W | 48V | 350 x 30 x 18mm |
| 0434-01-80          | 250W | 48V | 400 x 40 x 22mm |

220 V~  
240 | \*To be installed inside the track.




DROP VOLTAGE TABLE


| POWER [W] | CABLE SECTION (mm²) | CABLE LENGTH (m) |    |    |    |
|-----------|---------------------|------------------|----|----|----|
|           |                     | 5                | 10 | 20 | 30 |
|           |                     | TRACK LENGTH (m) |    |    |    |
| 100       | 0,75                | 50               | 50 | X  | X  |
|           | 1,5                 | 50               | 50 | 40 | 25 |
| 150       | 0,75                | 40               | 15 | X  | X  |
|           | 1,5                 | 50               | 40 | 20 | X  |
| 250       | 0,75                | 20               | X  | X  | X  |
|           | 1,5                 | 35               | 20 | X  | X  |

Connection diagrams:

Surface

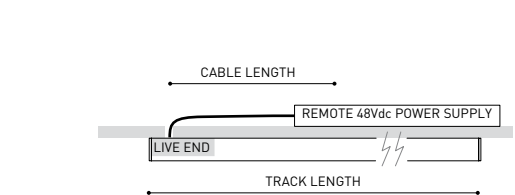


Remote driver installation




Integrated driver installation

Trimless

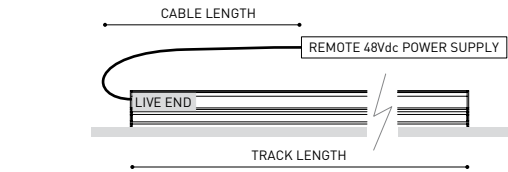


Remote driver installation

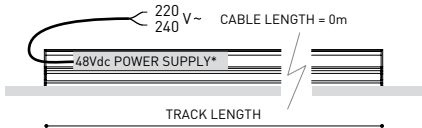


Integrated driver installation


Suspension

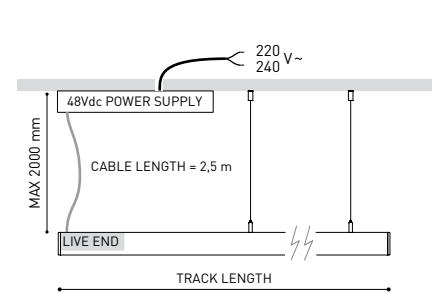

Aside box

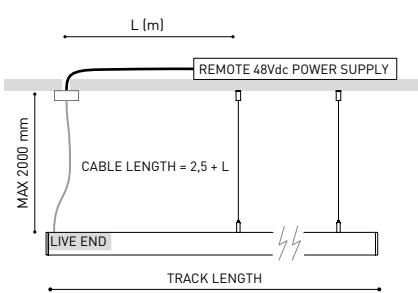

Remote driver installation

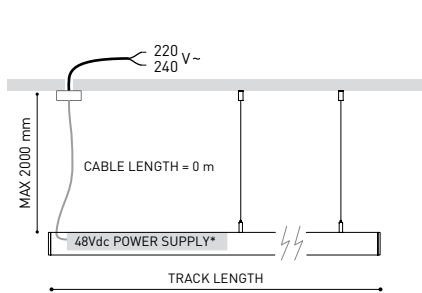

Integrated driver installation

COLOUR | N ■ RAL 9005 |

## Other accessories

## Alternative surface installation

For aside box installation replace the power supply:


## Power Supply Case 48V

A338-00-29- | NT | WT | 150W

220 V ~  
240



\*To be installed aside 48V Surface Tracks




## Suspension components

For a suspended configuration, use surface components together with the following accessories:

## SURFACE Suspension Kit (2 units) 48V

A338-00-15- | NT | WT |




For suspension aside box installation replace the power supply:

## Wired Power Supply Case 48V

A338-00-25- | NT | WT | 150W NO DIM

A338-00-26- | NT | WT | 150W DIM

220 V ~  
240




Required for remote or integrated driver installation:

## Suspension Feed Kit 48V

A338-00-16- | N | W | NO DIM

A338-00-17- | N | W | DIM

For remote power supply



A338-00-27- | N | W | NO DIM

A338-00-28- | N | W | DIM

For power supply inside the track

## Wire trimless accessories

For installing the suspension system cleanly and discreetly — with no visible ceiling boxes or mounting elements.

## FEED

## Mains Trimless\*

A023-00-01- | W | N | NO DIM

## Mains Thick Trimless\*


A023-00-02- | W | N | DIM



REMOTE

INCL

Ø20



## FASTENING


## Steel Cable Trimless\*

A023-00-05- | W | N |



INCL

Ø20




\* As many pieces as needed according to your product

## Trimless mounting accessories

These accessories offer different options for installing trimless track systems according to ceiling type and project needs.

## Trimless Plaster Installation Guard 1m 48V

A338-00-21




## Trimless Short T-Bracket 48V

A338-00-03



## Trimless Short T-Bracket 48V

A338-00-04



## Trimless Clamp for M6 ROD 48V

A338-00-09

\*See accessories quantities



## Trimless Track Clamp 48V

A338-00-10

\*See accessories quantities



## Trimless Suspension Kit 48V

A338-00-08


\*See accessories quantities

## SUGGESTED MOUNTING ACCESSORIES QUANTITIES


1000 mm - 2 Pcs

2000 mm - 2 Pcs

3000 mm - 3 Pcs



TRIMLESS INSTALLATION GUIDE  
<https://youtu.be/tgGsQdaYe-w>



## PRODUCT CONFIGURATOR

Use our online configurator to design your own custom product layout. The tool will guide you through the process and automatically calculate the required drivers and accessories.

[Start your configuration →](#)

COLOUR | NT ■ RAL 9005 | WT □ RAL 9016 | N ■ RAL 9005 | W □ RAL 9016 |

48V track lighting systems are low-voltage lighting solutions based on electrified tracks. The track serves both as a physical structure and as a power carrier, allowing light modules to be placed and repositioned as needed, offering flexibility, safety, and energy efficiency. Ideal for projects that demand minimalist design, high performance, and adaptability. To configure your 48V system, you'll need to combine the following components:

- 1. Tracks – Available in surface, trimless, surface short, suspended (using suspension accessories with the surface track), and indirect light versions. They form the structural and electrical base of the system.
- 2. Connectors & Power Supply – Ensure electrical continuity between track sections and provide the 48V power input.
- 3. Accessories – Including end caps, joiners, mounting elements, and optional installation accessories to complete and secure the setup.




Track Options

Choose the track version required for your project configuration.

|                             |                       | P     | CCT   | Flux   | LOR | L      |
|-----------------------------|-----------------------|-------|-------|--------|-----|--------|
| TRACK 48V + IND. LIGHT 1400 | A466-01-20-   NT   WT | 18,3W | 2700K | 2320lm | 70% | 1402mm |
|                             | A466-01-21-   NT   WT | 18,3W | 3000K | 2380lm | 70% | 1402mm |
|                             | A466-01-22-   NT   WT | 18,3W | 4000K | 2585lm | 70% | 1402mm |
| TRACK 48V + IND. LIGHT 2800 | A466-02-20-   NT   WT | 39,2W | 2700K | 5210lm | 70% | 2802mm |
|                             | A466-02-21-   NT   WT | 39,2W | 3000K | 5360lm | 70% | 2802mm |
|                             | A466-02-22-   NT   WT | 39,2W | 4000K | 5820lm | 70% | 2802mm |

48V | III | IP20 | CRI>90 | L90B5 >50.000h

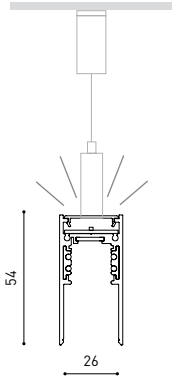

Complementary track accessories


Use end caps, joiners, and gap covers to connect, close, and cleanly finish your track setup.

Indirect Light Suspension kit 48V (2 units)  
A466-00-03- | NT | WT |

Suspension straight joiner kit 48V  
A466-00-04- | NT | WT |

Suspension 90° Corner joiner kit 48V  
A466-00-05- | NT | WT |


\*Electrical connection not included.

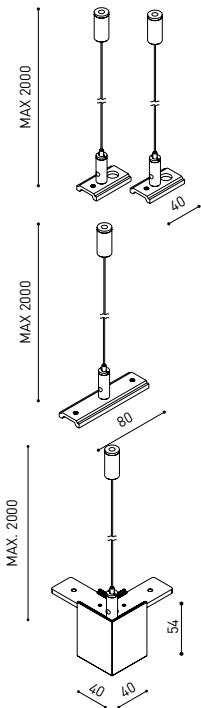

End 48V  
A338-00-06- | NT | WT |

End Feed 48V  
A338-00-07- | NT | WT |

Cover Gap 1m 48V  
A338-00-30- | N | W |



COLOUR | NT ■ RAL 9005 | WT □ RAL 9016 | N ■ RAL 9005 |


Electrical connections are not included. Please choose the required components from the Connectors section.

## Connector options

Connectors are required to provide electrical continuity between tracks, ensuring an uninterrupted 48V flow.


### Live-End Connector 48V

A338-00-01- | N | W |




### Central Connector 48V

A338-00-02- | N | W |




### T-Joint Connector 48V

A450-00-07- | N |




### Wireless Control 48V

0434-01-31- | N | W | Casambi




### Corner 90° Connector One Plane 48V

A338-00-24- | N | W |




### L-Joint Connector 48V

A338-00-12- | N | W |



### X-Joint Connector 48V

A450-00-08- | N |




## Power Supply Options

Select the appropriate power feed to deliver 48V to the system based on your track layout and installation type.


### Constant Voltage LED POWER SUPPLY

|                     | P    | V   | D (A x B x C)   |
|---------------------|------|-----|-----------------|
| 0434-01-61*   N   W | 100W | 48V | 298 x 19 x 16mm |
| 0434-01-69*   N   W | 250W | 48V | 268 x 22 x 40mm |
| 0434-01-62          | 150W | 48V | 350 x 30 x 18mm |
| 0434-01-80          | 250W | 48V | 400 x 40 x 22mm |


220 V~ 240 | \*To be installed inside the track.




0434-01-61\*



0434-01-69\*



0434-01-62




0434-01-80


### DROP VOLTAGE TABLE

|           |                     | CABLE LENGTH (m) |    |    |    |
|-----------|---------------------|------------------|----|----|----|
|           |                     | 5                | 10 | 20 | 30 |
| POWER (W) | CABLE SECTION (mm²) | TRACK LENGTH (m) |    |    |    |
|           |                     | 5                | 10 | 20 | 30 |
| 100       | 0,75                | 50               | 50 | X  | X  |
|           | 1,5                 | 50               | 50 | 40 | 25 |
| 150       | 0,75                | 40               | 15 | X  | X  |
|           | 1,5                 | 50               | 40 | 20 | X  |
| 250       | 0,75                | 20               | X  | X  | X  |
|           | 1,5                 | 35               | 20 | X  | X  |


## Connection diagrams:

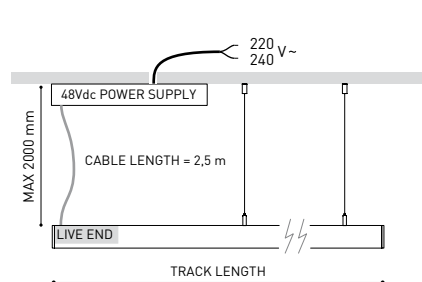

Aside box

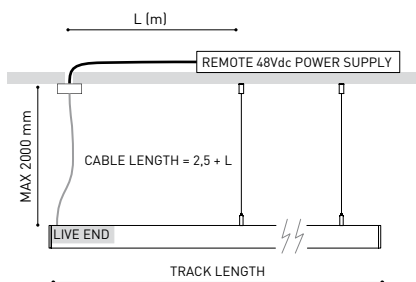

Remote driver installation

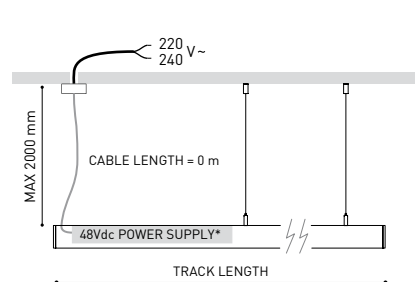

Integrated driver installation

COLOUR | N ■ RAL 9005 |

## Other accessories

## Suspension components



For suspension aside box installation replace the power supply:

## Wired Power Supply Case 48V

A338-00-25- | NT | WT | 150W  NO DIM

A338-00-26- | NT | WT | 150W  DIM

220 V~  
240  
INCL 



## PRODUCT CONFIGURATOR

Use our online configurator to design your own custom product layout. The tool will guide you through the process and automatically calculate the required drivers and accessories.

[Start your configuration →](#)


Required for remote or integrated driver installation:

## Suspension Feed Kit 48V

A338-00-16- | N | W |  NO DIM

A338-00-17- | N | W |  DIM

For remote power supply



A338-00-27- | N | W |  NO DIM

A338-00-28- | N | W |  DIM

For power supply inside the track

## Wire trimless accessories

For installing the suspension system cleanly and discreetly — with no visible ceiling boxes or mounting elements.


## FEED

## Mains Trimless\*

A023-00-01- | W | N |  NO DIM

## Mains Thick Trimless\*


A023-00-02- | W | N |  DIM



## FASTENING

## Steel Cable Trimless\*


A023-00-05- | W | N |




\* As many pieces as needed according to your product

## TRIMLESS TOOL D20 X D52mm

A478-00-01

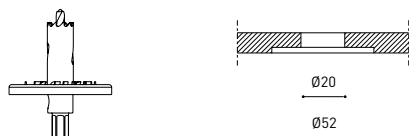

COLOUR | NT ■ RAL 9005 | WT □ RAL 9016 | N ■ RAL 9005 | W □ RAL 9016 |



Fuente de luz (LED) reemplazable por un profesional autorizado

Replaceable (LED only) light source by an authorized professional.

Source lumineuse (LED) remplaçable par un professionnel agréé

Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato

Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado

Replaceable control gear by an authorized professional

Dispositif de commande remplaçable par un professionnel agréé

Alimentatore sostituibile da parte di un professionista autorizzato

Auswechselbares Betriebsgerät durch autorisierten Fachmann

## Instrucciones para el final de vida y la eliminación de los componentes:

### Instructions on end-of-life and component disposal:

### Instructions pour la gestion des composants en fin de vie et leur mise au rebut :

### Istruzioni per il fine vita e lo smaltimento dei componenti:


### Anweisungen zur entsorgung der Leuchtenkomponenten:



Interrumpir la alimentación del aparato  
Cut the power supply to the luminaire  
Couper l'alimentation du luminaire  
Interrompere l'alimentazione dell'apparecchio  
Stromversorgung der Leuchte unterbrechen



Quitar la(s) fuente(s) de luz para el desecho  
Remove light source(s) for disposal  
Retirer la (les) source(s) lumineuse(s) pour l'élimination  
Rimuovere la/le sorgente/e di luce per lo smaltimento  
Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho  
Remove the battery for decommissioning  
Retirer la batterie pour sa mise au rebut  
Rimuovere la batteria per la dismissione  
Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho  
Remove control gear for disposal  
Retirer le dispositif de commande pour l'élimination  
Rimuovere l'alimentatore per lo smaltimento  
Betriebsgerät zur Entsorgung ausbauen

Enviar los materiales a un centro de recogida RAEE  
Send the materials to a WEEE collection centre  
Envoyer les matériaux dans une déchetterie DEEE  
Inviare i materiali ad un centro di raccolta RAEE  
Die Materialien in einem WEEE-Zentrum entsorgen

