




Dimensions



Accessories



TRIMLESS ACCESSORY
(MANDATORY)

	Name	BLACK FOSTER TRI 2 SPOT DIM PH.CUT 3500K N
	Reference	A5582153N
	Color	Black
	RAL	9005
	Category	CEILING RECESSED
	Type	LED
	Gross luminous flux	460 lm
	Colour temperature	3500 K
	Chromatic stability	MacAdam Step 3
	Colour Rendering Index	CRI>90
	Power	4,2 W
	Current	700 mA
	Efficacy	110 lm/W
	LED lifespan	L90B10 >102.000h
	Lighting efficiency	90%
	Light beam angle	19°
	Driver	Included
	Power values of the system	5,87 W
	Frequency	50/60 Hz
	Dimming	Phase Cut
	Electrical insulation class	□
	Sealing	IP20
	Wireless control	Please Consult
	Emergency power supply	Please Consult
	Recess measurements	49 x 93 mm
	Weight	150 g
	Packaged weight	230 g
	Packaging dimensions	275 x 85 x 70 mm
	Units per package	1
	Materials	Aluminium / Acrylonitrile Butadiene Styrene

PRODUCT

LIGHT SOURCE

LIGHTING FIXTURE | PHOTOMETRIC DATA


LIGHTING FIXTURE | ELECTRICAL DATA

OTHER DATA




Black Foster is the product that transfers the claimed effect "The Invisible Black" to a recessed-isolated lineal luminary; also available in trimless version. If we take a closer view to the recessed model, its bezel is so thin than when lighted up, it is unperceived; offering an aesthetic of "visual trimless". Black Foster stands out for its refinement, its visual comfort and for almost completely hide the source of light from the human eye range.

Polar diagram

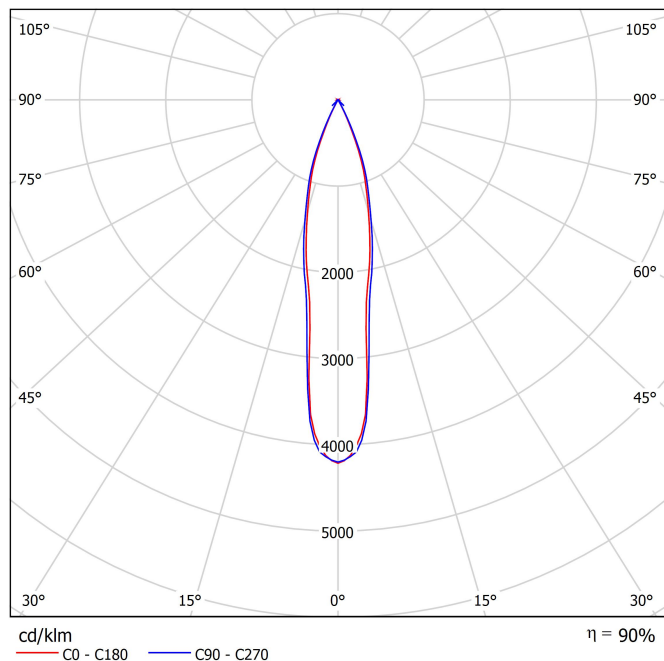

Conical diagram

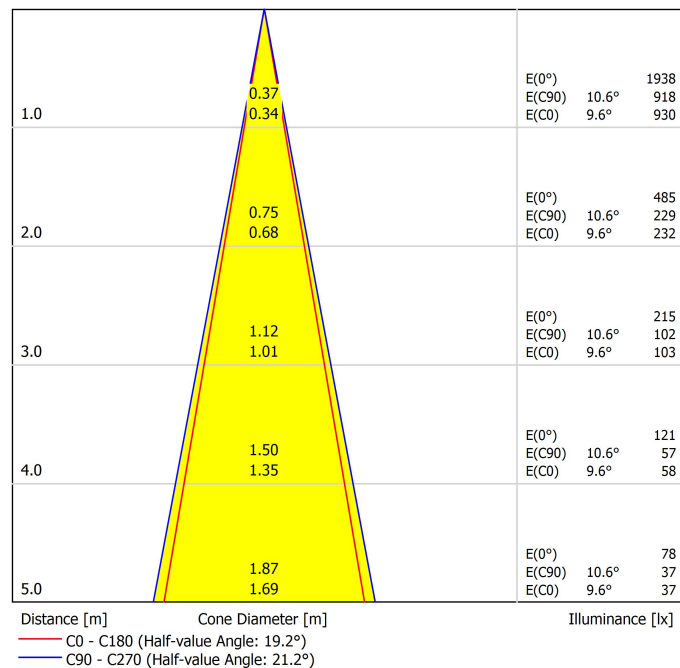


UGR

Glare Evaluation According to UGR												
ρ Ceiling			70	70	50	50	30	70	70	50	50	30
ρ Walls			50	30	50	30	30	50	30	50	30	30
ρ Floor			20	20	20	20	20	20	20	20	20	20
Room Size X Y			Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	4.9	5.6	5.2	5.8	6.0	4.6	5.3	4.9	5.5	5.7	
	3H	8.7	9.3	8.9	9.5	9.8	8.2	8.8	8.4	9.0	9.3	
	4H	10.6	11.2	10.9	11.4	11.7	10.2	10.8	10.5	11.0	11.3	
	6H	12.6	13.2	12.9	13.4	13.7	12.2	12.8	12.6	13.1	13.3	
	8H	13.7	14.2	14.1	14.5	14.8	13.5	14.1	13.9	14.3	14.6	
4H	12H	15.0	15.5	15.4	15.8	16.1	14.9	15.4	15.2	15.7	16.0	
	2H	6.0	6.6	6.3	6.8	7.1	5.8	6.4	6.1	6.6	6.9	
	3H	9.9	10.4	10.3	10.7	11.0	9.6	10.1	9.9	10.4	10.7	
	4H	11.9	12.4	12.3	12.7	13.0	11.7	12.2	12.1	12.5	12.8	
	6H	14.2	14.6	14.6	14.9	15.3	14.0	14.3	14.4	14.7	15.1	
8H	8H	15.4	15.7	15.8	16.1	16.5	15.3	15.6	15.7	16.0	16.4	
	12H	16.9	17.1	17.3	17.5	18.0	16.8	17.0	17.2	17.4	17.9	
	4H	12.8	13.1	13.2	13.5	13.9	12.6	12.9	13.0	13.3	13.7	
	6H	15.3	15.6	15.8	16.0	16.4	15.1	15.4	15.6	15.8	16.2	
	8H	16.7	16.9	17.2	17.4	17.8	16.7	16.9	17.1	17.3	17.8	
12H	12H	18.4	18.5	18.8	19.0	19.5	18.3	18.4	18.8	18.9	19.4	
	4H	13.0	13.3	13.5	13.7	14.1	12.9	13.2	13.3	13.6	14.0	
	6H	15.7	15.9	16.1	16.3	16.8	15.5	15.7	16.0	16.2	16.6	
	8H	17.2	17.3	17.7	17.8	18.3	17.1	17.3	17.6	17.8	18.3	
Variation of the observer position for the luminaire distances S												
S = 1.0H			+0.2 / -0.1					+0.2 / -0.2				
S = 1.5H			+0.3 / -0.3					+0.3 / -0.3				
S = 2.0H			+0.5 / -0.5					+0.5 / -0.5				
Standard table			---					---				
Correction Summand			---					---				
Corrected Glare Indices referring to 460lm Total Luminous Flux												

Installation guide



<https://youtu.be/tgGsQdaYe-w>



Fuente de luz (LED) reemplazable por un profesional autorizado

Replaceable (LED only) light source by an authorized professional.

Source lumineuse (LED) remplaçable par un professionnel agréé

Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato

Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado

Replaceable control gear by an authorized professional

Dispositif de commande remplaçable par un professionnel agréé

Alimentatore sostituibile da parte di un professionista autorizzato

Auswechselbares Betriebsgerät durch autorisierten Fachmann

Instrucciones para el final de vida y la eliminación de los componentes:

Instructions on end-of-life and component disposal:


Instructions pour la gestion des composants en fin de vie et leur mise au rebut :

Istruzioni per il fine vita e lo smaltimento dei componenti:


Anweisungen zur entsorgung der Leuchtenkomponenten:




Interrumpir la alimentación del aparato
Cut the power supply to the luminaire
Couper l'alimentation du luminaire
Interrompere l'alimentazione dell'apparecchio
Stromversorgung der Leuchte unterbrechen



Quitar la(s) fuente(s) de luz para el desecho
Remove light source(s) for disposal
Retirer la (les) source(s) lumineuse(s) pour l'élimination
Rimuovere la/le sorgente/e di luce per lo smaltimento
Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho
Remove the battery for decommissioning
Retirer la batterie pour sa mise au rebut
Rimuovere la batteria per la dismissione
Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho
Remove control gear for disposal
Retirer le dispositif de commande pour l'élimination
Rimuovere l'alimentatore per lo smaltimento
Betriebsgerät zur Entsorgung ausbauen

Enviar los materiales a un centro de recogida RAEE
Send the materials to a WEEE collection centre
Envoyer les matériaux dans une déchetterie DEEE
Inviare i materiali ad un centro di raccolta RAEE
Die Materialien in einem WEEE-Zentrum entsorgen

