




Dimensions



Accessories



DRIVER OPTIONS

Awards



PRODUCT

Name	PUCK M REMOTE TW 1800K-4000K WT
Reference	A5771007WT
Colour	Textured white
RAL	9016
Category	SURFACE

LIGHT SOURCE

Type	LED
Gross luminous flux	845 lm
Colour temperature	Tunable White 1800 - 4000K K
Chromatic stability	MacAdam Step 3
Colour Rendering Index	CRI>90
Power	8,5 W
Efficacy	100 lm/W
LED lifespan	L80B10 >55.000h
Energy efficiency class	F

LIGHTING FIXTURE | PHOTOMETRIC DATA

Lighting efficiency	79%
Light beam angle	44°
UGR	< 19

LIGHTING FIXTURE | ELECTRICAL DATA

Driver	Excluded: Must be placed on remote
Dimming	No Dim / DALI / Phase Cut
Electrical insulation class	II


OTHER DATA

Sealing	IP20
Weight	275 g
Packaged weight	320 g
Packaging dimensions	112 x 100 x 60 mm
Units per package	1
Materials	Aluminium / Optical Glass




Puck is a luminaire that –for its function, opening angle and luminous flux- manages to embody, in a surface piece, the performance of the classic recessed luminaires with dichroic lamps. Puck is designed to undertake general lighting functions and, moreover, given its ultra-compact format, aims to conserve discretion in those places where it is impossible to recess the appliances in the ceiling.

Polar diagram

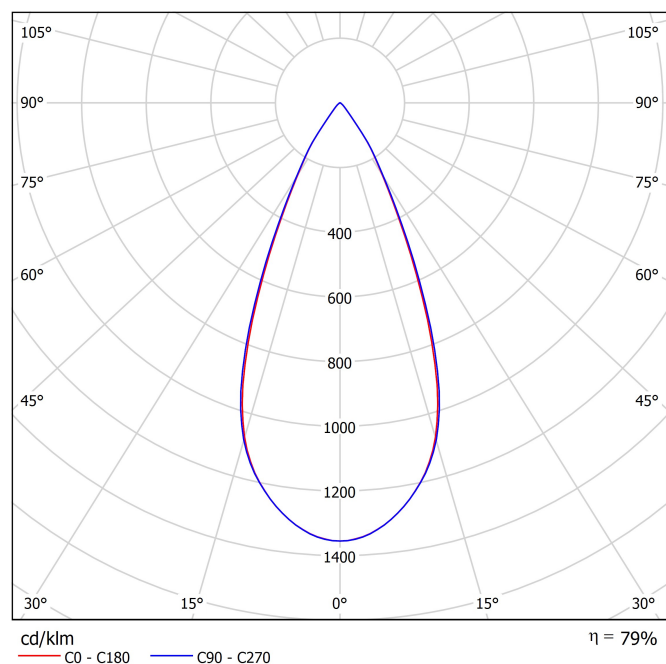


Conical diagram

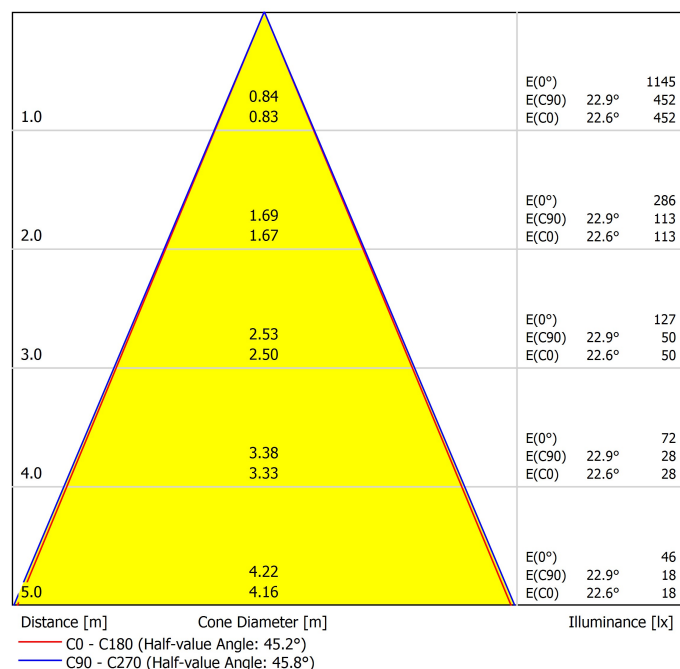

UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	
ρ Walls		50	30	50	30	30	50	30	50	30	30	
ρ Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	2.4	3.0	2.6	3.2	3.4	2.6	3.3	2.8	3.4	3.6	
	3H	2.9	3.5	3.2	3.8	4.0	3.1	3.7	3.4	4.0	4.2	
	4H	3.5	4.1	3.8	4.3	4.6	3.7	4.3	4.0	4.6	4.8	
	6H	4.0	4.5	4.3	4.8	5.0	4.2	4.7	4.5	5.0	5.3	
	8H	4.0	4.5	4.4	4.8	5.1	4.3	4.8	4.6	5.1	5.3	
	12H	4.1	4.5	4.4	4.8	5.1	4.3	4.8	4.6	5.1	5.4	
4H	2H	2.4	3.0	2.7	3.3	3.5	2.6	3.2	2.9	3.5	3.7	
	3H	3.3	3.8	3.7	4.1	4.4	3.5	4.0	3.8	4.3	4.6	
	4H	4.2	4.6	4.5	4.9	5.2	4.4	4.8	4.7	5.1	5.4	
	6H	4.7	5.1	5.1	5.4	5.8	5.0	5.3	5.4	5.7	6.0	
	8H	4.8	5.1	5.3	5.5	5.9	5.1	5.4	5.5	5.8	6.2	
	12H	4.9	5.2	5.3	5.6	6.0	5.1	5.4	5.6	5.8	6.2	
8H	4H	4.5	4.8	4.9	5.2	5.6	4.7	5.0	5.1	5.3	5.7	
	6H	5.2	5.4	5.6	5.8	6.3	5.4	5.6	5.8	6.0	6.4	
	8H	5.3	5.5	5.8	5.9	6.4	5.5	5.7	6.0	6.1	6.6	
	12H	5.4	5.5	5.9	6.0	6.5	5.6	5.7	6.1	6.2	6.7	
12H	4H	4.5	4.8	4.9	5.2	5.6	4.7	4.9	5.1	5.3	5.7	
	6H	5.2	5.4	5.7	5.8	6.3	5.4	5.6	5.8	6.0	6.5	
	8H	5.4	5.5	5.8	6.0	6.5	5.6	5.7	6.0	6.2	6.7	
Variation of the observer position for the luminaire distances S												
S = 1.0H		+5.3 / -6.5					+5.3 / -6.5					
S = 1.5H		+8.0 / -8.2					+8.1 / -8.2					
S = 2.0H		+10.0 / -8.8					+10.0 / -8.8					
Standard table		BK00					BK00					
Correction Summand		-5.7					-5.6					
Corrected Glare Indices referring to 845lm Total Luminous Flux												



PUCK M Remote Tunable White						
DRIVER OPTIONS		n Luminaires	P	I	CCT	Flux
 DALI	0434-01-96	1 Puck M	8,5W	500mA	1800 - 4000K	845 lm
220 V~						
240						



Fuente de luz (LED) reemplazable por un profesional autorizado

Replaceable (LED only) light source by an authorized professional.

Source lumineuse (LED) remplaçable par un professionnel agréé

Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato

Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado

Replaceable control gear by an authorized professional

Dispositif de commande remplaçable par un professionnel agréé

Alimentatore sostituibile da parte di un professionista autorizzato

Auswechselbares Betriebsgerät durch autorisierten Fachmann

Instrucciones para el final de vida y la eliminación de los componentes:

Instructions on end-of-life and component disposal:

Instructions pour la gestion des composants en fin de vie et leur mise au rebut :

Istruzioni per il fine vita e lo smaltimento dei componenti:

Anweisungen zur entsorgung der Leuchtenkomponenten:



Interrumpir la alimentación del aparato
Cut the power supply to the luminaire
Couper l'alimentation du luminaire
Interrompere l'alimentazione dell'apparecchio
Stromversorgung der Leuchte unterbrechen



Quitar la(s) fuente(s) de luz para el desecho
Remove light source(s) for disposal
Retirer la (les) source(s) lumineuse(s) pour l'élimination
Rimuovere la/le sorgente/e di luce per lo smaltimento
Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho
Remove the battery for decommissioning
Retirer la batterie pour sa mise au rebut
Rimuovere la batteria per la dismissione
Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho
Remove control gear for disposal
Retirer le dispositif de commande pour l'élimination
Rimuovere l'alimentatore per lo smaltimento
Betriebsgerät zur Entsorgung ausbauen

Enviar los materiales a un centro de recogida RAEE
Send the materials to a WEEE collection centre
Envoyer les matériaux dans une déchetterie DEEE
Inviare i materiali ad un centro di raccolta RAEE
Die Materialien in einem WEEE-Zentrum entsorgen

