



Dimensions



Accessories



DRIVER OPTIONS

PRODUCT

Name	BUDDY SURFACE DIM TO WARM WT
Reference	A5940239WT
Colour	Textured white - Black
RAL	9016
Category	SURFACE

LIGHT SOURCE

Type	LED
Gross luminous flux	670 lm
Colour temperature	Dim to warm 3000 - 1800 K
Chromatic stability	MacAdam Step 3
Colour Rendering Index	CRI>90
Power	6 W
Current	350 mA
Efficacy	112 lm/W
LED lifespan	L80B10 >55.000h
Energy efficiency class	F

LIGHTING FIXTURE | PHOTOMETRIC DATA

Lighting efficiency	61%
Light beam angle	54°
UGR	< 19

LIGHTING FIXTURE | ELECTRICAL DATA

Driver	Excluded
Dimming	DALI / Phase Cut
Electrical insulation class	II


OTHER DATA

Sealing	IP20
Wireless control	Please Consult
Weight	285 g
Packaged weight	350 g
Packaging dimensions	111 x 104 x 95 mm
Units per package	1
Materials	Aluminium / Polycarbonate / Polymethyl Methacrylate



Buddy is available as a surface-mounted downlight, distinguished by its compact size and suitable for installation on any material. All the performance features of this compact yet powerful spotlight are available across its recessed, trimless, and surface versions: High energy-efficiency LED, Tunable White options: 1800K-4000K or 2700K-5000K, Dim to Warm option: 1800K-3000K, beam angles: Flood, Medium, Spot, and Superspot, low glare: UGR < 19. One single family with everything you could ever need, designed by Rubén Saldaña.


Polar diagram

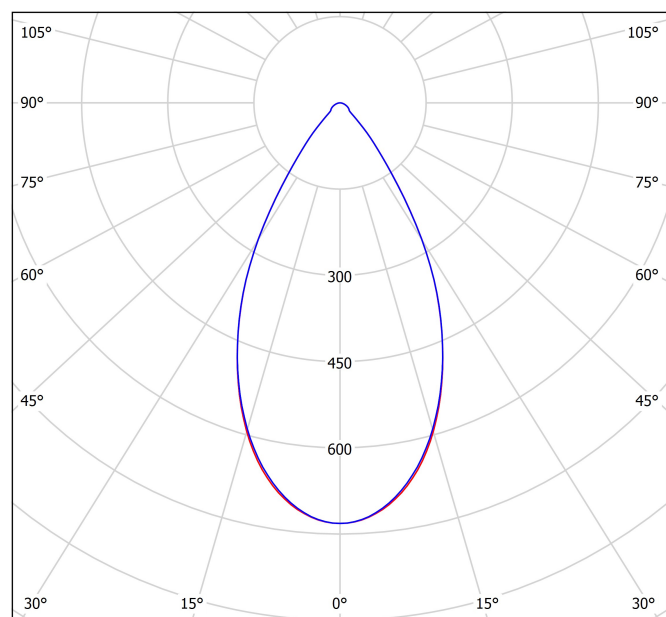

cd/klm
— C0 - C180 — C90 - C270

η = 61%

Conical diagram

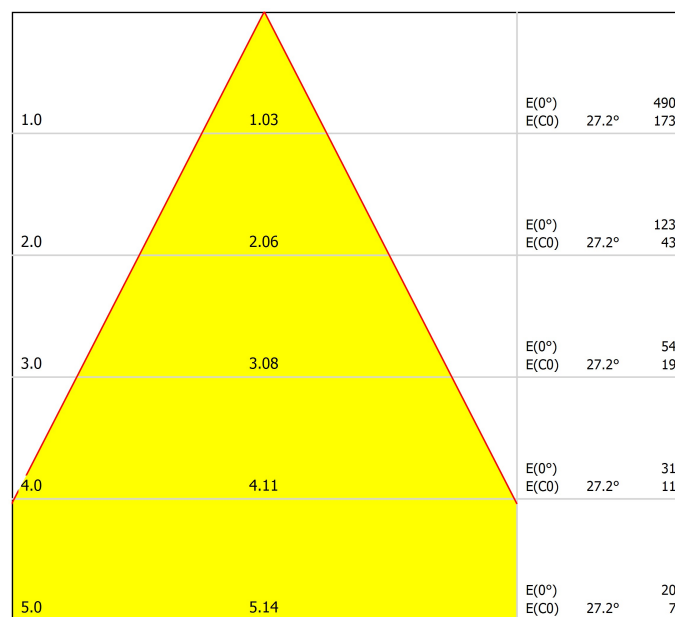

Distance [m] Cone Diameter [m]
— C0 - C180 (Half-value Angle: 54.4°)

Illuminance [lx]

UGR

Glare Evaluation According to UGR

Room Size X Y		Viewing direction at right angles to lamp axis						Viewing direction parallel to lamp axis					
2H	2H	12.5	13.3	12.8	13.5	13.7	12.5	13.3	12.8	13.5	13.7		
	3H	14.2	14.9	14.5	15.1	15.3	14.2	14.9	14.5	15.1	15.4		
	4H	14.8	15.4	15.1	15.7	16.0	14.8	15.5	15.1	15.7	16.0		
	6H	15.2	15.8	15.6	16.1	16.4	15.3	15.9	15.6	16.2	16.4		
	8H	15.4	15.9	15.7	16.2	16.5	15.4	16.0	15.7	16.3	16.6		
4H	12H	15.5	16.0	15.8	16.3	16.6	15.5	16.0	15.8	16.3	16.7		
	2H	13.1	13.7	13.4	14.0	14.3	13.1	13.8	13.4	14.0	14.3		
	3H	15.0	15.5	15.3	15.8	16.1	15.0	15.5	15.3	15.8	16.2		
	4H	15.7	16.2	16.1	16.5	16.9	15.7	16.2	16.1	16.5	16.9		
	6H	16.3	16.7	16.7	17.0	17.4	16.3	16.7	16.7	17.1	17.4		
8H	8H	16.5	16.8	16.9	17.2	17.6	16.5	16.8	16.9	17.2	17.6		
	12H	16.6	16.9	17.0	17.3	17.7	16.6	16.9	17.0	17.3	17.7		
	4H	16.0	16.3	16.4	16.7	17.1	16.0	16.4	16.4	16.7	17.1		
	6H	16.7	16.9	17.1	17.4	17.8	16.7	17.0	17.1	17.4	17.8		
	8H	16.9	17.1	17.4	17.6	18.1	16.9	17.2	17.4	17.6	18.1		
12H	12H	17.1	17.3	17.6	17.8	18.2	17.1	17.3	17.6	17.8	18.3		
	4H	16.0	16.3	16.4	16.7	17.1	16.0	16.3	16.4	16.7	17.2		
	6H	16.7	16.9	17.2	17.4	17.9	16.7	17.0	17.2	17.4	17.9		
8H	17.0	17.2	17.5	17.7	18.1	17.0	17.2	17.5	17.7	18.2			
Variation of the observer position for the luminaire distances S													
S = 1.0H		+2.5 / -1.5						+2.5 / -1.5					
S = 1.5H		+4.6 / -1.8						+4.6 / -1.7					
S = 2.0H		+6.4 / -2.2						+6.3 / -2.1					
Standard table		BK03						BK03					
Correction Summand		0.3						0.3					
Corrected Glare Indices referring to 670lm Total Luminous Flux													



DRIVER OPTIONS		P	I	CCT	Flux
 DALI	0434-01-94	6W	350mA	1800-3000K	670 lm
 Phase Cut	0434-01-95				
220 240 V~					



Fuente de luz (LED) reemplazable por un profesional autorizado

Replaceable (LED only) light source by an authorized professional.

Source lumineuse (LED) remplaçable par un professionnel agréé

Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato

Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado

Replaceable control gear by an authorized professional

Dispositif de commande remplaçable par un professionnel agréé

Alimentatore sostituibile da parte di un professionista autorizzato

Auswechselbares Betriebsgerät durch autorisierten Fachmann

Instrucciones para el final de vida y la eliminación de los componentes:

Instructions on end-of-life and component disposal:

Instructions pour la gestion des composants en fin de vie et leur mise au rebut :

Istruzioni per il fine vita e lo smaltimento dei componenti:

Anweisungen zur entsorgung der Leuchtenkomponenten:



Interrumpir la alimentación del aparato
Cut the power supply to the luminaire
Couper l'alimentation du luminaire
Interrompere l'alimentazione dell'apparecchio
Stromversorgung der Leuchte unterbrechen



Quitar la(s) fuente(s) de luz para el desecho
Remove light source(s) for disposal
Retirer la (les) source(s) lumineuse(s) pour l'élimination
Rimuovere la/le sorgente/e di luce per lo smaltimento
Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho
Remove the battery for decommissioning
Retirer la batterie pour sa mise au rebut
Rimuovere la batteria per la dismissione
Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho
Remove control gear for disposal
Retirer le dispositif de commande pour l'élimination
Rimuovere l'alimentatore per lo smaltimento
Betriebsgerät zur Entsorgung ausbauen

Enviar los materiales a un centro de recogida RAEE
Send the materials to a WEEE collection centre
Envoyer les matériaux dans une déchetterie DEEE
Inviare i materiali ad un centro di raccolta RAEE
Die Materialien in einem WEEE-Zentrum entsorgen

