




#### DIMENSIONS



#### ACCESSORIES

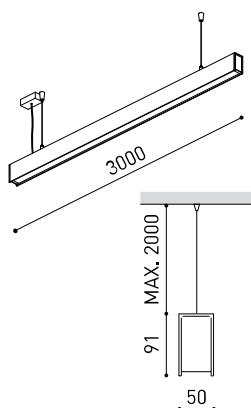

CUSTOM ACCESSORIES  
(MANDATORY)



TRIMLESS TOOL



WIRE TRIMLESS ACCESSORY

#### PRODUCT

|           |                                          |
|-----------|------------------------------------------|
| Name      | FIFTY+ SUSP CUSTOM 300 DIM PUSH 3000K WT |
| Reference | A4440431WT                               |
| Color     | Textured white                           |
| RAL       | 9016                                     |
| Category  | CUSTOM SYSTEMS                           |

#### LIGHT SOURCE

|                        |                  |
|------------------------|------------------|
| Type                   | LED              |
| Gross luminous flux    | 6840 lm          |
| Colour temperature     | 3000 K           |
| Chromatic stability    | MacAdam Step 2   |
| Colour Rendering Index | CRI > 90         |
| Power                  | 46,2 W           |
| Current                | 700 mA           |
| Efficacy               | 144 lm/W         |
| LED lifespan           | L80B10 > 60.000h |

#### LIGHTING FIXTURE | PHOTOMETRIC DATA

|                     |                |
|---------------------|----------------|
| Lighting efficiency | 70% / UGR 47%  |
| Light beam angle    | 104° / UGR 62° |

#### LIGHTING FIXTURE | ELECTRICAL DATA

|                             |                         |
|-----------------------------|-------------------------|
| Driver                      | Included - Fast Connect |
| Power values of the system  | 52,68 W                 |
| Frequency                   | 50/60 Hz                |
| Dimming                     | Push                    |
| Electrical insulation class | ⊥                       |


#### OTHER DATA

|                           |                           |
|---------------------------|---------------------------|
| Sealing                   | IP20                      |
| Wireless control          | Please Consult            |
| Cord length               | Max. 2 m                  |
| Fast adjustment tensioner | Yes                       |
| Diffuser included         | No                        |
| Weight                    | 8710 g                    |
| Packaged weight           | 12860 g                   |
| Packaging dimensions      | Ø157,5 x 3140 mm          |
| Units per package         | 1                         |
| Materials                 | Aluminium / Polycarbonate |



Fifty+ is the longitudinal lighting profile for Custom application. Fifty + adds functional light and visual support to highlight the lines, volumes and transitions defined in the architecture. Having an Opal diffuser which disperses the light and a UGR diffuser that reduces the glare angle. Both are installed as a single part along its entire length so as not to interrupt the light beam.


## POLAR DIAGRAM

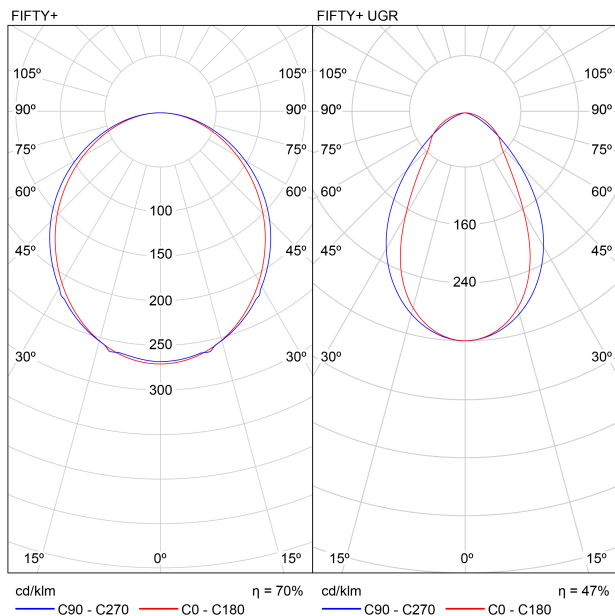

## UGR

| Glare Evaluation According to UGR                                 |     |                                                   |      |      |      |      |                                            |      |      |      |      |              |  |  |  |  |  |  |
|-------------------------------------------------------------------|-----|---------------------------------------------------|------|------|------|------|--------------------------------------------|------|------|------|------|--------------|--|--|--|--|--|--|
|                                                                   |     | $\rho$ Ceiling                                    |      |      |      |      | $\rho$ Walls                               |      |      |      |      | $\rho$ Floor |  |  |  |  |  |  |
|                                                                   |     | 70                                                | 70   | 50   | 50   | 30   | 70                                         | 70   | 50   | 50   | 30   | 30           |  |  |  |  |  |  |
|                                                                   |     | 50                                                | 30   | 50   | 30   | 30   | 50                                         | 30   | 50   | 30   | 30   | 30           |  |  |  |  |  |  |
|                                                                   |     | 20                                                | 20   | 20   | 20   | 20   | 20                                         | 20   | 20   | 20   | 20   | 20           |  |  |  |  |  |  |
| Room Size<br>X Y                                                  |     | Viewing direction at right angles<br>to lamp axis |      |      |      |      | Viewing direction parallel<br>to lamp axis |      |      |      |      |              |  |  |  |  |  |  |
| 2H                                                                | 2H  | 19.9                                              | 21.2 | 20.2 | 21.4 | 21.7 | 20.3                                       | 21.6 | 20.6 | 21.8 | 22.0 |              |  |  |  |  |  |  |
|                                                                   | 3H  | 21.6                                              | 22.7 | 21.9 | 23.0 | 23.3 | 22.0                                       | 23.2 | 22.3 | 23.4 | 23.7 |              |  |  |  |  |  |  |
|                                                                   | 4H  | 22.2                                              | 23.3 | 22.5 | 23.6 | 23.8 | 22.7                                       | 23.8 | 23.0 | 24.0 | 24.3 |              |  |  |  |  |  |  |
|                                                                   | 6H  | 22.6                                              | 23.6 | 23.0 | 23.9 | 24.2 | 23.1                                       | 24.2 | 23.5 | 24.5 | 24.8 |              |  |  |  |  |  |  |
|                                                                   | 8H  | 22.7                                              | 23.7 | 23.1 | 24.0 | 24.4 | 23.3                                       | 24.3 | 23.7 | 24.6 | 24.9 |              |  |  |  |  |  |  |
|                                                                   | 12H | 22.8                                              | 23.7 | 23.2 | 24.1 | 24.4 | 23.4                                       | 24.3 | 23.8 | 24.7 | 25.0 |              |  |  |  |  |  |  |
| 4H                                                                | 2H  | 20.5                                              | 21.6 | 20.8 | 21.9 | 22.2 | 20.0                                       | 21.9 | 21.1 | 22.2 | 22.5 |              |  |  |  |  |  |  |
|                                                                   | 3H  | 22.4                                              | 23.3 | 22.7 | 23.6 | 24.0 | 22.7                                       | 23.7 | 23.1 | 24.0 | 24.3 |              |  |  |  |  |  |  |
|                                                                   | 4H  | 23.1                                              | 23.9 | 23.5 | 24.3 | 24.7 | 23.5                                       | 24.4 | 23.9 | 24.7 | 25.1 |              |  |  |  |  |  |  |
|                                                                   | 6H  | 23.7                                              | 24.4 | 24.1 | 24.8 | 25.2 | 24.1                                       | 24.9 | 24.5 | 25.2 | 25.6 |              |  |  |  |  |  |  |
|                                                                   | 8H  | 23.8                                              | 24.5 | 24.3 | 24.9 | 25.3 | 24.3                                       | 25.0 | 24.8 | 25.4 | 25.8 |              |  |  |  |  |  |  |
|                                                                   | 12H | 24.0                                              | 24.6 | 24.4 | 25.0 | 25.4 | 24.5                                       | 25.1 | 24.9 | 25.5 | 25.9 |              |  |  |  |  |  |  |
| 8H                                                                | 4H  | 23.4                                              | 24.1 | 23.8 | 24.5 | 24.9 | 23.8                                       | 24.4 | 24.2 | 24.8 | 25.3 |              |  |  |  |  |  |  |
|                                                                   | 6H  | 24.1                                              | 24.6 | 24.6 | 25.1 | 25.5 | 24.5                                       | 25.1 | 25.0 | 25.5 | 25.9 |              |  |  |  |  |  |  |
|                                                                   | 8H  | 24.4                                              | 24.8 | 24.8 | 25.3 | 25.8 | 24.8                                       | 25.3 | 25.3 | 25.7 | 26.2 |              |  |  |  |  |  |  |
|                                                                   | 12H | 24.5                                              | 24.9 | 25.0 | 25.4 | 25.9 | 25.0                                       | 25.4 | 25.5 | 25.9 | 26.4 |              |  |  |  |  |  |  |
|                                                                   | 4H  | 23.4                                              | 24.0 | 23.9 | 24.5 | 24.9 | 23.8                                       | 24.4 | 24.2 | 24.8 | 25.2 |              |  |  |  |  |  |  |
|                                                                   | 6H  | 24.2                                              | 24.6 | 24.6 | 25.1 | 25.6 | 24.6                                       | 25.0 | 25.0 | 25.5 | 26.0 |              |  |  |  |  |  |  |
| 12H                                                               | 8H  | 24.5                                              | 24.9 | 24.9 | 25.3 | 25.8 | 24.9                                       | 25.3 | 25.4 | 25.8 | 26.3 |              |  |  |  |  |  |  |
|                                                                   |     |                                                   |      |      |      |      |                                            |      |      |      |      |              |  |  |  |  |  |  |
| Variation of the observer position for the luminaires distances S |     |                                                   |      |      |      |      |                                            |      |      |      |      |              |  |  |  |  |  |  |
| S = 1.0H                                                          |     | +0.1 / -0.1                                       |      |      |      |      | +0.1 / -0.1                                |      |      |      |      |              |  |  |  |  |  |  |
| S = 1.5H                                                          |     | +0.2 / -0.4                                       |      |      |      |      | +0.2 / -0.4                                |      |      |      |      |              |  |  |  |  |  |  |
| S = 2.0H                                                          |     | +0.4 / -0.8                                       |      |      |      |      | +0.4 / -0.7                                |      |      |      |      |              |  |  |  |  |  |  |
| Standard table                                                    |     | BK05                                              |      |      |      |      | BK06                                       |      |      |      |      |              |  |  |  |  |  |  |
| Correction                                                        |     | -1.1                                              |      |      |      |      | -0.1                                       |      |      |      |      |              |  |  |  |  |  |  |
| Summand                                                           |     |                                                   |      |      |      |      |                                            |      |      |      |      |              |  |  |  |  |  |  |
| Corrected Glare Indices referring to 6840lm Total Luminous Flux   |     |                                                   |      |      |      |      |                                            |      |      |      |      |              |  |  |  |  |  |  |


## CONICAL DIAGRAM

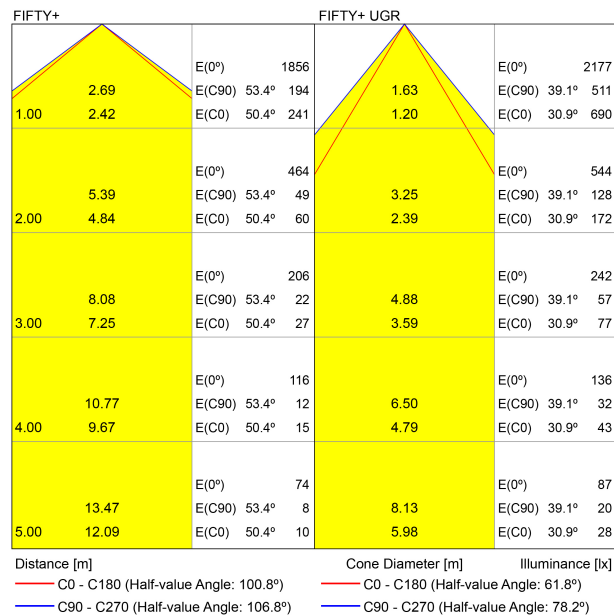

## UGR

| Glare Evaluation According to UGR                                 |     |                                                   |      |      |      |      |                                            |      |      |      |      |    |
|-------------------------------------------------------------------|-----|---------------------------------------------------|------|------|------|------|--------------------------------------------|------|------|------|------|----|
|                                                                   |     | 70                                                | 70   | 50   | 50   | 30   | 70                                         | 70   | 50   | 50   | 30   | 30 |
| $\rho$ Ceiling                                                    |     | 70                                                | 50   | 50   | 30   | 30   | 70                                         | 70   | 50   | 50   | 30   | 30 |
| $\rho$ Walls                                                      |     | 50                                                | 30   | 50   | 30   | 30   | 50                                         | 30   | 50   | 30   | 30   | 30 |
| $\rho$ Floor                                                      |     | 20                                                | 20   | 20   | 20   | 20   | 20                                         | 20   | 20   | 20   | 20   | 20 |
| Room Size<br>X Y                                                  |     | Viewing direction at right angles<br>to lamp axis |      |      |      |      | Viewing direction parallel<br>to lamp axis |      |      |      |      |    |
| 2H                                                                | 2H  | 15.4                                              | 16.5 | 15.7 | 16.7 | 16.9 | 14.9                                       | 15.9 | 15.1 | 16.1 | 16.3 |    |
|                                                                   | 3H  | 17.1                                              | 18.0 | 17.4 | 18.3 | 18.5 | 15.9                                       | 16.9 | 16.2 | 17.1 | 17.4 |    |
|                                                                   | 4H  | 17.7                                              | 18.6 | 18.0 | 18.8 | 19.1 | 16.3                                       | 17.2 | 16.6 | 17.5 | 17.7 |    |
|                                                                   | 6H  | 18.1                                              | 18.9 | 18.4 | 19.2 | 19.5 | 16.6                                       | 17.4 | 16.9 | 17.7 | 18.0 |    |
|                                                                   | 8H  | 18.2                                              | 19.0 | 18.5 | 19.3 | 19.6 | 16.7                                       | 17.4 | 17.0 | 17.7 | 18.1 |    |
|                                                                   | 12H | 18.2                                              | 19.0 | 18.6 | 19.3 | 19.6 | 16.7                                       | 17.5 | 17.1 | 17.8 | 18.1 |    |
| 4H                                                                | 2H  | 15.7                                              | 16.6 | 16.0 | 16.9 | 17.1 | 15.2                                       | 16.1 | 15.6 | 16.4 | 16.7 |    |
|                                                                   | 3H  | 17.6                                              | 18.3 | 17.9 | 18.6 | 19.0 | 16.5                                       | 17.3 | 16.9 | 17.6 | 17.9 |    |
|                                                                   | 4H  | 18.3                                              | 18.9 | 18.7 | 19.3 | 19.6 | 17.1                                       | 17.7 | 17.4 | 18.0 | 18.4 |    |
|                                                                   | 6H  | 18.8                                              | 19.4 | 19.2 | 19.7 | 20.1 | 17.4                                       | 18.0 | 17.8 | 18.4 | 18.8 |    |
|                                                                   | 8H  | 19.0                                              | 19.5 | 19.4 | 19.9 | 20.3 | 17.6                                       | 18.1 | 18.0 | 18.5 | 18.9 |    |
|                                                                   | 12H | 19.1                                              | 19.5 | 19.5 | 19.9 | 20.4 | 17.6                                       | 18.1 | 18.1 | 18.5 | 18.9 |    |
| 8H                                                                | 4H  | 18.4                                              | 18.9 | 18.9 | 19.3 | 19.7 | 17.3                                       | 17.8 | 17.7 | 18.2 | 18.6 |    |
|                                                                   | 6H  | 19.1                                              | 19.5 | 19.5 | 19.9 | 20.3 | 17.8                                       | 18.2 | 18.2 | 18.6 | 19.1 |    |
|                                                                   | 8H  | 19.3                                              | 19.6 | 19.7 | 20.1 | 20.5 | 18.0                                       | 18.3 | 18.4 | 18.8 | 19.2 |    |
|                                                                   | 12H | 19.4                                              | 19.7 | 19.9 | 20.2 | 20.7 | 18.1                                       | 18.4 | 18.6 | 18.9 | 19.4 |    |
|                                                                   | 4H  | 18.4                                              | 18.9 | 18.9 | 19.3 | 19.7 | 17.3                                       | 17.8 | 17.8 | 18.2 | 18.6 |    |
|                                                                   | 6H  | 19.1                                              | 19.4 | 19.5 | 19.9 | 20.3 | 17.8                                       | 18.2 | 18.3 | 18.6 | 19.1 |    |
| 12H                                                               | 8H  | 19.3                                              | 19.6 | 19.8 | 20.1 | 20.6 | 18.1                                       | 18.4 | 18.5 | 18.8 | 19.3 |    |
|                                                                   |     |                                                   |      |      |      |      |                                            |      |      |      |      |    |
| Variation of the observer position for the luminaires distances S |     |                                                   |      |      |      |      |                                            |      |      |      |      |    |
| S = 1.0H                                                          |     | +0.3 / -0.3                                       |      |      |      |      | +0.3 / -0.5                                |      |      |      |      |    |
| S = 1.5H                                                          |     | +0.5 / -0.4                                       |      |      |      |      | +1.2 / -1.2                                |      |      |      |      |    |
| S = 2.0H                                                          |     | +0.9 / -0.9                                       |      |      |      |      | +2.3 / -1.8                                |      |      |      |      |    |
| Standard table                                                    |     | BK05                                              |      |      |      |      | BK03                                       |      |      |      |      |    |
| Correction                                                        |     |                                                   |      |      |      |      |                                            |      |      |      |      |    |
| Summand                                                           |     | -7.0                                              |      |      |      |      | -8.5                                       |      |      |      |      |    |
| Corrected Glare Indices referring to 6840lm Total Luminous Flux   |     |                                                   |      |      |      |      |                                            |      |      |      |      |    |

|                                                          |                                |
|----------------------------------------------------------|--------------------------------|
| <b>FIFTY+ Diffuser (x meter)</b>                         | <b>A447-00-00</b>              |
| <b>FIFTY+ UGR Diffuser (x meter)</b>                     | <b>A447-00-10</b>              |
| <b>FIFTY+ 2 End Cap Kit</b>                              | <b>A447-00-20-   WT   NT  </b> |
| <b>FIFTY+ Straight Joiner</b>                            | <b>A447-00-30</b>              |
| <b>FIFTY+ Suspension Kit</b>                             | <b>A444-00-20-   WT   NT  </b> |
| At least 2 units needed. Extra unit each 100 cm required |                                |
| <b>FIFTY+ Suspension Power Line</b>                      | <b>A444-00-00-   WT   NT  </b> |
|                                                          | <b>A444-00-10-   WT   NT  </b> |

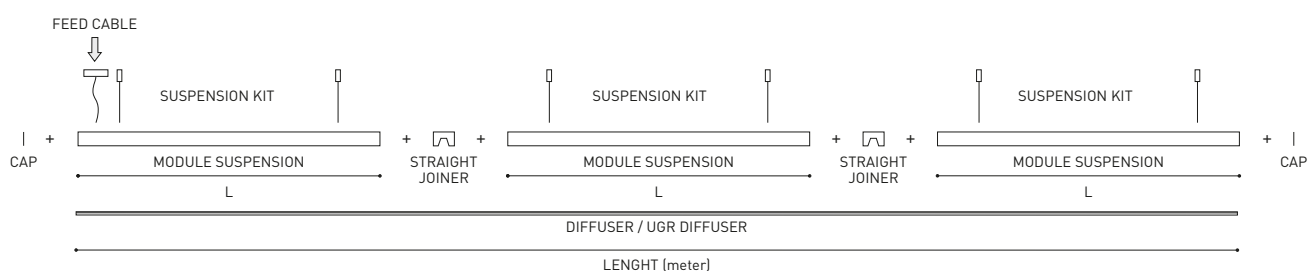

COLOUR | WT ☐ RAL 9016 | NT ☒ RAL 9005 |

MATERIAL | ☐ AL | ☒ PC |

# WIRE TRIMLESS ACCESSORY


ARKOSLIGHT®

## FIFTY SUSPENSION



### FEED



| PRODUCT   |                                                                                      |
|-----------|--------------------------------------------------------------------------------------|
| Model     | Mains Trimless                                                                       |
| Reference | A023-00-01-   W   N                                                                  |
| Colour    | W <input type="checkbox"/> RAL 9016   N <input checked="" type="checkbox"/> RAL 9005 |
| Category  | Accessories                                                                          |



| PRODUCT   |                                                                                      |
|-----------|--------------------------------------------------------------------------------------|
| Model     | Mains Thick Trimless                                                                 |
| Reference | A023-00-02-   W   N                                                                  |
| Colour    | W <input type="checkbox"/> RAL 9016   N <input checked="" type="checkbox"/> RAL 9005 |
| Category  | Accessories                                                                          |



Wire Trimless Accessory is a collection of accessories for fitting tensioners and cables to Arkoslight luminaires suspended directly from the ceiling with any visible ceiling rose or fixings. This achieves a minimalist application with a visually tidy finish.

With Wire Trimless Accessory the items adjacent to the ceiling of the standard product (ceiling roses, fixings, driver boxes, etc.) are concealed by a simple recessed application.


Wire Trimless Accessory reduces the visual impact of the installation leading to extremely minimalist aesthetics. The wires come out of the ceiling material as a part of the structure. This detail creates a much purer, more essential layout, particular when several luminaires are fitted in an arrangement.

## FASTENING



| PRODUCT   |                                                                                      |
|-----------|--------------------------------------------------------------------------------------|
| Model     | Steel Cable Trimless                                                                 |
| Reference | A023-00-05-   W   N                                                                  |
| Colour    | W <input type="checkbox"/> RAL 9016   N <input checked="" type="checkbox"/> RAL 9005 |
| Category  | Accessories                                                                          |

As many pieces as needed  
according to your product



Wire Trimless Accessory is a collection of accessories for fitting tensioners and cables to Arkoslight luminaires suspended directly from the ceiling with any visible ceiling rose or fixings. This achieves a minimalist application with a visually tidy finish.

With Wire Trimless Accessory the items adjacent to the ceiling of the standard product (ceiling roses, fixings, driver boxes, etc.) are concealed by a simple recessed application.

Wire Trimless Accessory reduces the visual impact of the installation leading to extremely minimalist aesthetics. The wires come out of the ceiling material as a part of the structure. This detail creates a much purer, more essential layout, particular when several luminaires are fitted in an arrangement.





## INSTALLATION GUIDE


[https://youtu.be/sa\\_xAgj4ji4](https://youtu.be/sa_xAgj4ji4)



## PRODUCT

|           |                                   |
|-----------|-----------------------------------|
| Model     | Trimless Tool <b>D20 X D52 MM</b> |
| Reference | A478-00-01                        |
| Category  | Accessories                       |





Fuente de luz (LED) reemplazable por un profesional autorizado

Replaceable (LED only) light source by an authorized professional.

Source lumineuse (LED) remplaçable par un professionnel agréé

Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato

Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado

Replaceable control gear by an authorized professional

Dispositif de commande remplaçable par un professionnel agréé

Alimentatore sostituibile da parte di un professionista autorizzato

Auswechselbares Betriebsgerät durch autorisierten Fachmann

## INSTRUCCIONES PARA EL FINAL DE VIDA Y LA ELIMINACIÓN LOS COMPONENTES

### INSTRUCTIONS ON END-OF-LIFE AND COMPONENT DISPOSAL

### INSTRUCTIONS POUR LA GESTION DES COMPOSANTS EN FIN DE VIE ET LEUR MISE AU REBUT

### ISTRUZIONI PER IL FINE VITA E LO SMALTIMENTO DEI COMPONENTI

### ANWEISUNGEN ZUR ENTSORGUNG DER LEUCHTENKOMPONENTEN




Interrumpir la alimentación del aparato

Cut the power supply to the luminaire

Couper l'alimentation du luminaire

Interrompere l'alimentazione dell'apparecchio

Stromversorgung der Leuchte unterbrechen




Quitar la(s) fuente(s) de luz para el desecho

Remove light source(s) for disposal

Retirer la (les) source(s) lumineuse(s) pour l'élimination

Rimuovere la/le sorgente/e di luce per lo smaltimento

Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho

Remove the battery for decommissioning

Retirer la batterie pour sa mise au rebut

Rimuovere la batteria per la dismissione

Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho

Remove control gear for disposal

Retirer le dispositif de commande pour l'élimination

Rimuovere l'alimentatore per lo smaltimento

Betriebsgerät zur Entsorgung ausbauen

Enviar los materiales a un centro de recogida RAEE

Send the materials to a WEEE collection centre

Envoyer les matériaux dans une déchetterie DEEE

Inviare i materiali ad un centro di raccolta RAEE

Die Materialien in einem WEEE-Zentrum entsorgen

