




#### DIMENSIONS



#### ACCESSORIES

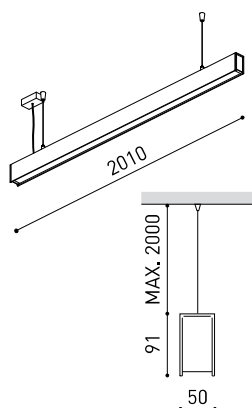

WIRE TRIMLESS ACCESSORY



TRIMLESS TOOL

#### PRODUCT

|           |                                      |
|-----------|--------------------------------------|
| Name      | FIFTY+ HO SUSP 200 DIM DALI 3000K NT |
| Reference | A4461321NT                           |
| Color     | Textured black                       |
| RAL       | 9005                                 |
| Category  | SUSPENSION                           |

#### LIGHT SOURCE

|                        |                  |
|------------------------|------------------|
| Type                   | LED              |
| Gross luminous flux    | 6520 lm          |
| Colour temperature     | 3000 K           |
| Chromatic stability    | MacAdam Step 2   |
| Colour Rendering Index | CRI > 90         |
| Power                  | 47,2 W           |
| Current                | 1050 mA          |
| Efficacy               | 138 lm/W         |
| LED lifespan           | L80B10 > 60.000h |

#### LIGHTING FIXTURE | PHOTOMETRIC DATA

|                     |      |
|---------------------|------|
| Lighting efficiency | 70%  |
| Light beam angle    | 104° |

#### LIGHTING FIXTURE | ELECTRICAL DATA

|                             |          |
|-----------------------------|----------|
| Driver                      | Included |
| Power values of the system  | 51,98 W  |
| Frequency                   | 50/60 Hz |
| Dimming                     | DALI     |
| Electrical insulation class | ⚡        |


#### OTHER DATA

|                           |                           |
|---------------------------|---------------------------|
| Sealing                   | IP20                      |
| Wireless control          | Please Consult            |
| Cord length               | Max. 2 m                  |
| Fast adjustment tensioner | Yes                       |
| Diffuser included         | Yes                       |
| Weight                    | 6160 g                    |
| Packaged weight           | 9020 g                    |
| Packaging dimensions      | Ø157,5 x 2140 mm          |
| Units per package         | 1                         |
| Materials                 | Aluminium / Polycarbonate |




Fifty + is the longitudinal lighting profile for Suspension application, individually. Fifty + adds functional light and visual support to highlight the lines, volumes and transitions defined in the architecture. Having an Opal diffuser which disperses the light and a UGR diffuser that reduces the glare angle. Both are installed as a single part along its entire length so as not to interrupt the light beam.

## POLAR DIAGRAM

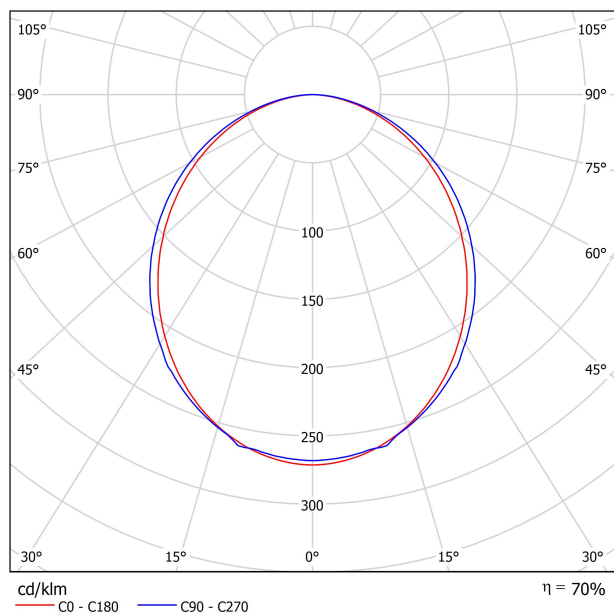

## CONICAL DIAGRAM

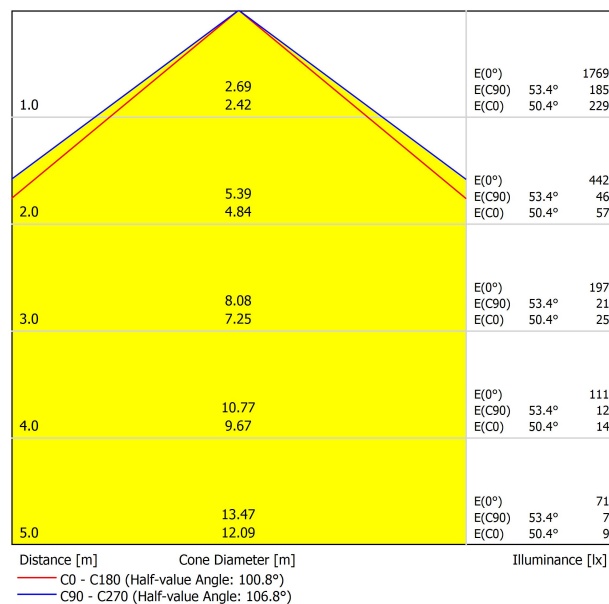

## UGR

| Glare Evaluation According to UGR                                 |     |                                                   |      |      |      |      |                                            |      |      |      |      |      |
|-------------------------------------------------------------------|-----|---------------------------------------------------|------|------|------|------|--------------------------------------------|------|------|------|------|------|
|                                                                   |     | 70                                                | 70   | 50   | 50   | 30   | 70                                         | 70   | 50   | 50   | 30   | 30   |
| p Ceiling                                                         |     | 70                                                | 70   | 50   | 50   | 30   | 70                                         | 70   | 50   | 50   | 30   | 30   |
| p Walls                                                           |     | 50                                                | 30   | 50   | 30   | 30   | 50                                         | 30   | 50   | 30   | 30   | 30   |
| p Floor                                                           |     | 20                                                | 20   | 20   | 20   | 20   | 20                                         | 20   | 20   | 20   | 20   | 20   |
| Room Size<br>X Y                                                  |     | Viewing direction at right angles<br>to lamp axis |      |      |      |      | Viewing direction parallel<br>to lamp axis |      |      |      |      |      |
| 2H                                                                | 2H  | 21.1                                              | 22.4 | 21.4 | 22.7 | 22.9 | 21.5                                       | 22.8 | 21.8 | 23.0 | 23.3 | 23.3 |
|                                                                   | 3H  | 22.8                                              | 24.0 | 23.1 | 24.2 | 24.5 | 23.2                                       | 24.4 | 23.6 | 24.7 | 24.9 | 24.9 |
|                                                                   | 4H  | 23.4                                              | 24.5 | 23.7 | 24.8 | 25.1 | 23.9                                       | 25.0 | 24.2 | 25.3 | 25.6 | 25.6 |
|                                                                   | 6H  | 23.8                                              | 24.9 | 24.2 | 25.2 | 25.5 | 24.4                                       | 25.4 | 24.7 | 25.7 | 26.0 | 26.0 |
|                                                                   | 8H  | 24.0                                              | 24.9 | 24.3 | 25.3 | 25.6 | 24.5                                       | 25.5 | 24.9 | 25.8 | 26.1 | 26.1 |
| 4H                                                                | 12H | 24.0                                              | 25.0 | 24.4 | 25.3 | 25.6 | 24.6                                       | 25.6 | 25.0 | 25.9 | 26.2 | 26.2 |
|                                                                   | 2H  | 21.7                                              | 22.8 | 22.1 | 23.1 | 23.4 | 22.0                                       | 23.1 | 22.3 | 23.4 | 23.7 | 23.7 |
|                                                                   | 3H  | 23.6                                              | 24.5 | 24.0 | 24.9 | 25.2 | 24.0                                       | 24.9 | 24.3 | 25.2 | 25.6 | 25.6 |
|                                                                   | 4H  | 24.3                                              | 25.2 | 24.7 | 25.5 | 25.9 | 24.7                                       | 25.6 | 25.1 | 25.9 | 26.3 | 26.3 |
|                                                                   | 6H  | 24.9                                              | 25.6 | 25.3 | 26.0 | 26.4 | 25.4                                       | 26.1 | 25.8 | 26.5 | 26.9 | 26.9 |
| 8H                                                                | 8H  | 25.1                                              | 25.7 | 25.5 | 26.1 | 26.6 | 25.6                                       | 26.2 | 26.0 | 26.6 | 27.0 | 27.0 |
|                                                                   | 12H | 25.2                                              | 25.8 | 25.6 | 26.2 | 26.6 | 25.7                                       | 26.3 | 26.2 | 26.7 | 27.2 | 27.2 |
|                                                                   | 4H  | 24.6                                              | 25.3 | 25.1 | 25.7 | 26.1 | 25.0                                       | 25.7 | 25.4 | 26.1 | 26.5 | 26.5 |
|                                                                   | 6H  | 25.3                                              | 25.9 | 25.8 | 26.3 | 26.8 | 25.7                                       | 26.3 | 26.2 | 26.7 | 27.2 | 27.2 |
|                                                                   | 8H  | 25.6                                              | 26.1 | 26.1 | 26.5 | 27.0 | 26.0                                       | 26.5 | 26.5 | 27.0 | 27.4 | 27.4 |
| 12H                                                               | 12H | 25.8                                              | 26.2 | 26.2 | 26.6 | 27.1 | 26.3                                       | 26.7 | 26.7 | 27.1 | 27.6 | 27.6 |
|                                                                   | 4H  | 24.7                                              | 25.3 | 25.1 | 25.7 | 26.1 | 25.0                                       | 25.6 | 25.5 | 26.0 | 26.5 | 26.5 |
|                                                                   | 6H  | 25.4                                              | 25.9 | 25.9 | 26.3 | 26.8 | 25.8                                       | 26.3 | 26.3 | 26.7 | 27.2 | 27.2 |
|                                                                   | 8H  | 25.7                                              | 26.1 | 26.2 | 26.6 | 27.1 | 26.1                                       | 26.5 | 26.6 | 27.0 | 27.5 | 27.5 |
| Variation of the observer position for the luminaires distances S |     |                                                   |      |      |      |      |                                            |      |      |      |      |      |
| S = 1.0H                                                          |     | +0.1 / -0.1                                       |      |      |      |      | +0.1 / -0.1                                |      |      |      |      |      |
| S = 1.5H                                                          |     | +0.2 / -0.4                                       |      |      |      |      | +0.2 / -0.4                                |      |      |      |      |      |
| S = 2.0H                                                          |     | +0.4 / -0.8                                       |      |      |      |      | +0.4 / -0.7                                |      |      |      |      |      |
| Standard table                                                    |     | BK05                                              |      |      |      |      | BK06                                       |      |      |      |      |      |
| Correction Summand                                                |     | 0.3                                               |      |      |      |      | 1.3                                        |      |      |      |      |      |
| Corrected Glare Indices referring to 6500lm Total Luminous Flux   |     |                                                   |      |      |      |      |                                            |      |      |      |      |      |

# WIRE TRIMLESS ACCESSORY


ARKOSLIGHT®

## FIFTY SUSPENSION


### FEED



| PRODUCT   |                                                                                      |
|-----------|--------------------------------------------------------------------------------------|
| Model     | Mains Trimless                                                                       |
| Reference | A023-00-01-   W   N                                                                  |
| Colour    | W <input type="checkbox"/> RAL 9016   N <input checked="" type="checkbox"/> RAL 9005 |
| Category  | Accessories                                                                          |



| PRODUCT   |                                                                                      |
|-----------|--------------------------------------------------------------------------------------|
| Model     | Mains Thick Trimless                                                                 |
| Reference | A023-00-02-   W   N                                                                  |
| Colour    | W <input type="checkbox"/> RAL 9016   N <input checked="" type="checkbox"/> RAL 9005 |
| Category  | Accessories                                                                          |



Wire Trimless Accessory is a collection of accessories for fitting tensioners and cables to Arkoslight luminaires suspended directly from the ceiling with any visible ceiling rose or fixings. This achieves a minimalist application with a visually tidy finish.

With Wire Trimless Accessory the items adjacent to the ceiling of the standard product (ceiling roses, fixings, driver boxes, etc.) are concealed by a simple recessed application.


Wire Trimless Accessory reduces the visual impact of the installation leading to extremely minimalist aesthetics. The wires come out of the ceiling material as a part of the structure. This detail creates a much purer, more essential layout, particular when several luminaires are fitted in an arrangement.

## FASTENING



| PRODUCT   |                                                                                      |
|-----------|--------------------------------------------------------------------------------------|
| Model     | Steel Cable Trimless                                                                 |
| Reference | A023-00-05-   W   N                                                                  |
| Colour    | W <input type="checkbox"/> RAL 9016   N <input checked="" type="checkbox"/> RAL 9005 |
| Category  | Accessories                                                                          |

As many pieces as needed  
according to your product



Wire Trimless Accessory is a collection of accessories for fitting tensioners and cables to Arkoslight luminaires suspended directly from the ceiling with any visible ceiling rose or fixings. This achieves a minimalist application with a visually tidy finish.

With Wire Trimless Accessory the items adjacent to the ceiling of the standard product (ceiling roses, fixings, driver boxes, etc.) are concealed by a simple recessed application.

Wire Trimless Accessory reduces the visual impact of the installation leading to extremely minimalist aesthetics. The wires come out of the ceiling material as a part of the structure. This detail creates a much purer, more essential layout, particular when several luminaires are fitted in an arrangement.





INSTALLATION GUIDE

[https://youtu.be/sa\\_xAgj4ji4](https://youtu.be/sa_xAgj4ji4)



## PRODUCT

|           |                                   |
|-----------|-----------------------------------|
| Model     | Trimless Tool <b>D20 X D52 MM</b> |
| Reference | A478-00-01                        |
| Category  | Accessories                       |





Fuente de luz (LED) reemplazable por un profesional autorizado

Replaceable (LED only) light source by an authorized professional.

Source lumineuse (LED) remplaçable par un professionnel agréé

Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato

Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado

Replaceable control gear by an authorized professional

Dispositif de commande remplaçable par un professionnel agréé

Alimentatore sostituibile da parte di un professionista autorizzato

Auswechselbares Betriebsgerät durch autorisierten Fachmann

INSTRUCCIONES PARA EL FINAL DE VIDA Y LA ELIMINACIÓN LOS COMPONENTES  
INSTRUCTIONS ON END-OF-LIFE AND COMPONENT DISPOSAL  
INSTRUCTIONS POUR LA GESTION DES COMPOSANTS EN FIN DE VIE ET LEUR MISE AU REBUT  
ISTRUZIONI PER IL FINE VITA E LO SMALTIMENTO DEI COMPONENTI  
ANWEISUNGEN ZUR ENTSORGUNG DER LEUCHTENKOMPONENTEN



Interrumpir la alimentación del aparato  
Cut the power supply to the luminaire  
Couper l'alimentation du luminaire  
Interrompere l'alimentazione dell'apparecchio  
Stromversorgung der Leuchte unterbrechen



Quitar la(s) fuente(s) de luz para el desecho  
Remove light source(s) for disposal  
Retirer la (les) source(s) lumineuse(s) pour l'élimination  
Rimuovere la/le sorgente/e di luce per lo smaltimento  
Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho  
Remove the battery for decommissioning  
Retirer la batterie pour sa mise au rebut  
Rimuovere la batteria per la dismissione  
Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho  
Remove control gear for disposal  
Retirer le dispositif de commande pour l'élimination  
Rimuovere l'alimentatore per lo smaltimento  
Betriebsgerät zur Entsorgung ausbauen

Enviar los materiales a un centro de recogida RAEE  
Send the materials to a WEEE collection centre  
Envoyer les matériaux dans une déchetterie DEEE  
Inviare i materiali ad un centro di raccolta RAEE  
Die Materialien in einem WEEE-Zentrum entsorgen

