


#### DIMENSIONS



#### ACCESSORIES



DRIVER OPTIONS

Name	REC MICRO 3000K WT
Reference	A4610001WT
Color	Textured white
RAL	9016
Category	WALL

#### LIGHT SOURCE

Type	LED
Gross luminous flux	1560 lm
Colour temperature	3000 K
Chromatic stability	MacAdam Step 2
Colour Rendering Index	CRI>90
Power	12,8 W
Current	700 mA
Efficacy	122 lm/W
LED lifespan	L80B10 >60.000h

#### LIGHTING FIXTURE | PHOTOMETRIC DATA

Lighting efficiency	79%
Light beam angle	97°

#### LIGHTING FIXTURE | ELECTRICAL DATA

Driver	Excluded: Must be placed on remote
Dimming	No Dim / DALI
Electrical insulation class	III


#### OTHER DATA

Sealing	IP20
Wireless control	Please Consult
Weight	245 g
Packaged weight	275 g
Packaging dimensions	124 x 115 x 37 mm
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate





Rec is a LED appliance that is especially ideal to carry out indirect lighting functions. This is a luminary that perfectly fits into projects that prioritise the comfort given by indirect lighting but also require a high volume of light. Formally, Rec is expressed in a slender cuboid with pure lines and a minimalist design.

POLAR DIAGRAM

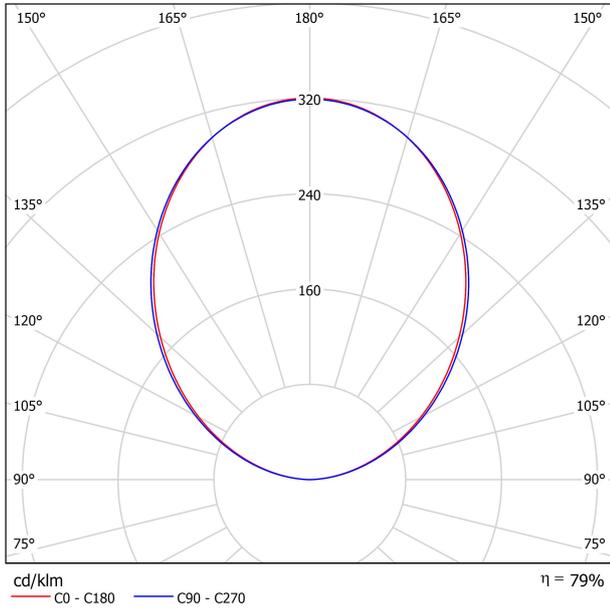

CONICAL DIAGRAM

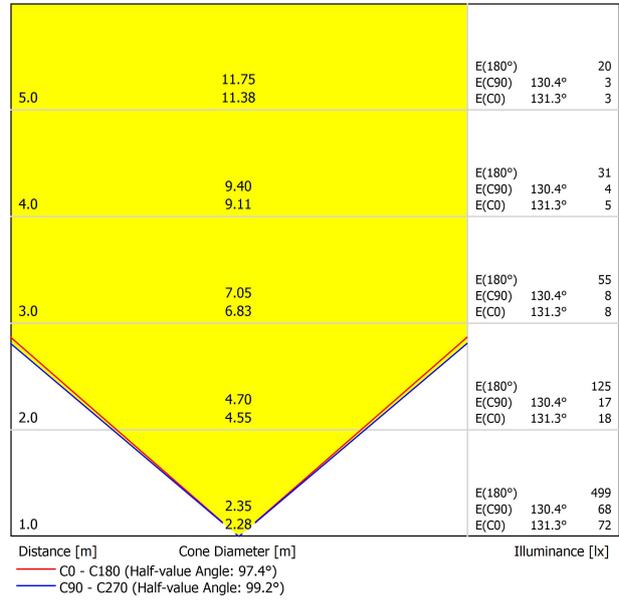




DRIVER OPTIONS	P	I	CCT	Flux	
 NO DIM	<b>0434-00-40</b> 1 to 2 Rec Micro	12,8W	700mA	2700	1465 lm
				3000	1560 lm
				4000	1650 lm
 DALI	<b>0434-01-43</b> 1 to 3 Rec Micro	12,8W	700mA	2700	1465 lm
				3000	1560 lm
				4000	1650 lm
 NO DIM	<b>0434-00-46</b> 1 to 2 Rec Micro	12,8W	700mA	2700	1465 lm
				3000	1560 lm
				4000	1650 lm
 DALI	<b>0434-01-25</b> 1 to 3 Rec Micro	12,8W	700mA	2700	1465 lm
				3000	1560 lm
				4000	1650 lm

220  
240 V~

Driver must be placed on remote



Fuente de luz (LED) reemplazable por un profesional autorizado  
 Replaceable (LED only) light source by an authorized professional.  
 Source lumineuse (LED) remplaçable par un professionnel agréé  
 Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato  
 Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado  
 Replaceable control gear by an authorized professional  
 Dispositif de commande remplaçable par un professionnel agréé  
 Alimentatore sostituibile da parte di un professionista autorizzato  
 Auswechselbares Betriebsgerät durch autorisierten Fachmann


INSTRUCCIONES PARA EL FINAL DE VIDA Y LA ELIMINACIÓN LOS COMPONENTES  
 INSTRUCTIONS ON END-OF-LIFE AND COMPONENT DISPOSAL  
 INSTRUCTIONS POUR LA GESTION DES COMPOSANTS EN FIN DE VIE ET LEUR MISE AU REBUT  
 ISTRUZIONI PER IL FINE VITA E LO SMALTIMENTO DEI COMPONENTI  
 ANWEISUNGEN ZUR ENTSORGUNG DER LEUCHTENKOMPONENTEN



Interrumpir la alimentación del aparato  
 Cut the power supply to the luminaire  
 Couper l'alimentation du luminaire  
 Interrompere l'alimentazione dell'apparecchio  
 Stromversorgung der Leuchte unterbrechen



Quitar la(s) fuente(s) de luz para el desecho  
 Remove light source(s) for disposal  
 Retirer la (les) source(s) lumineuse(s) pour l'élimination  
 Rimuovere la/le sorgente/e di luce per lo smaltimento  
 Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho  
 Remove the battery for decommissioning  
 Retirer la batterie pour sa mise au rebut  
 Rimuovere la batteria per la dismissione  
 Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho  
 Remove control gear for disposal  
 Retirer le dispositif de commande pour l'élimination  
 Rimuovere l'alimentatore per lo smaltimento  
 Betriebsgerät zur Entsorgung ausbauen

Enviar los materiales a un centro de recogida RAEE  
 Send the materials to a WEEE collection centre  
 Envoyer les matériaux dans une déchetterie DEEE  
 Inviare i materiali ad un centro di raccolta RAEE  
 Die Materialien in einem WEEE-Zentrum entsorgen

