




## DIMENSIONS



## AWARDS

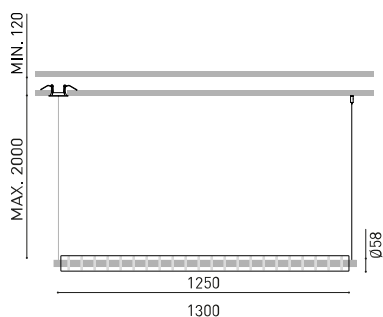

reddot winner 2023  
lighting design

archiproducts  
AWARDS  
WINNER

|                |                                              |
|----------------|----------------------------------------------|
| Name           | LOOP 1300 INDIRECT DIM DALI 3000K BG         |
| Reference      | A4741021BG                                   |
| Color          | Brushed Gold - Other colours, please consult |
| Base Finishing | Textured black                               |
| RAL            | Electrolytic bath                            |
| Category       | SUSPENSION                                   |

## LIGHT SOURCE

|                        |                  |
|------------------------|------------------|
| Type                   | LED              |
| Gross luminous flux    | 3060 lm          |
| Colour temperature     | 3000 K           |
| Chromatic stability    | MacAdam Step 3   |
| Colour Rendering Index | CRI>90           |
| Power                  | 26,5 W           |
| Current                | 700 mA           |
| Efficacy               | 115 lm/W         |
| LED lifespan           | L90B10 >102.000h |

## LIGHTING FIXTURE | PHOTOMETRIC DATA

|                     |      |
|---------------------|------|
| Lighting efficiency | 38%  |
| Light beam angle    | 110° |

## LIGHTING FIXTURE | ELECTRICAL DATA

|                             |                                  |
|-----------------------------|----------------------------------|
| Driver                      | Included                         |
| Power values of the system  | 29,94 W                          |
| Frequency                   | 50/60 Hz                         |
| Dimming                     | DALI - Other DIM, please consult |
| Electrical insulation class | □                                |


## OTHER DATA

|                           |                                                 |
|---------------------------|-------------------------------------------------|
| Sealing                   | IP20                                            |
| Wireless control          | Please Consult                                  |
| Recess measurements       | Ø62 mm                                          |
| Cord length               | Max. 2 m                                        |
| Fast adjustment tensioner | No                                              |
| Weight                    | 3100 g                                          |
| Packaged weight           | 5100 g                                          |
| Packaging dimensions      | Ø127 x 1645 mm                                  |
| Units per package         | 1                                               |
| Materials                 | Optical glass / Optical Polymethyl Methacrylate |




Daring and fanciful, Loop appeals to industrial lyricism with a design inspired by electrical insulators. The protagonist of the decoration, its body is a sequence of light disks with an aluminium interior. It's adorned by a suspended glass cylinder that acts as a fastflowing, controlled source of projected light.

POLAR DIAGRAM

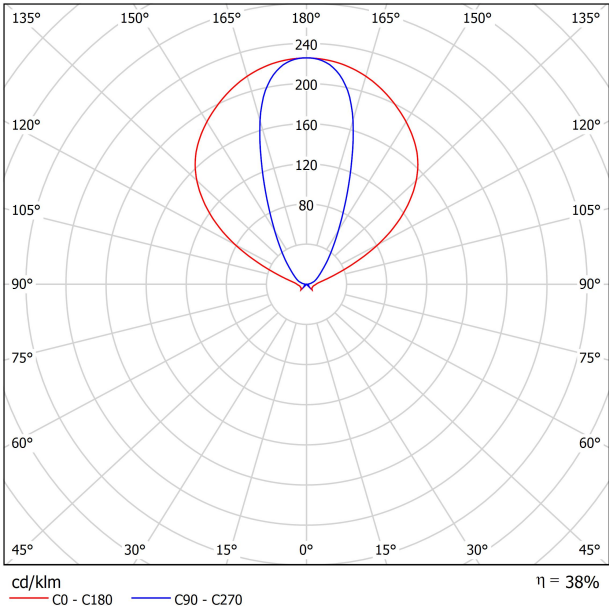

CONICAL DIAGRAM

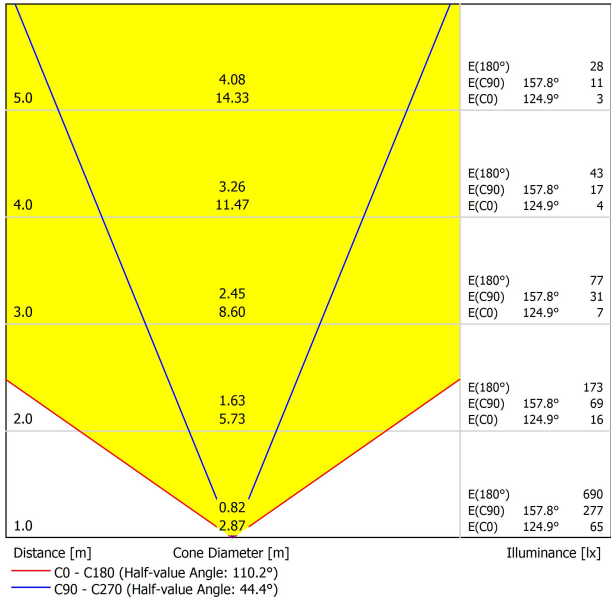



Fuente de luz (LED) reemplazable por un profesional autorizado

Replaceable (LED only) light source by an authorized professional.

Source lumineuse (LED) remplaçable par un professionnel agréé

Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato

Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado

Replaceable control gear by an authorized professional

Dispositif de commande remplaçable par un professionnel agréé

Alimentatore sostituibile da parte di un professionista autorizzato

Auswechselbares Betriebsgerät durch autorisierten Fachmann

INSTRUCCIONES PARA EL FINAL DE VIDA Y LA ELIMINACIÓN LOS COMPONENTES  
INSTRUCTIONS ON END-OF-LIFE AND COMPONENT DISPOSAL  
INSTRUCTIONS POUR LA GESTION DES COMPOSANTS EN FIN DE VIE ET LEUR MISE AU REBUT  
ISTRUZIONI PER IL FINE VITA E LO SMALTIMENTO DEI COMPONENTI  
ANWEISUNGEN ZUR ENTSORGUNG DER LEUCHTENKOMPONENTEN



Interrumpir la alimentación del aparato  
Cut the power supply to the luminaire  
Couper l'alimentation du luminaire  
Interrompere l'alimentazione dell'apparecchio  
Stromversorgung der Leuchte unterbrechen



Quitar la(s) fuente(s) de luz para el desecho  
Remove light source(s) for disposal  
Retirer la (les) source(s) lumineuse(s) pour l'élimination  
Rimuovere la/le sorgente/e di luce per lo smaltimento  
Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho  
Remove the battery for decommissioning  
Retirer la batterie pour sa mise au rebut  
Rimuovere la batteria per la dismissione  
Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho  
Remove control gear for disposal  
Retirer le dispositif de commande pour l'élimination  
Rimuovere l'alimentatore per lo smaltimento  
Betriebsgerät zur Entsorgung ausbauen

Enviar los materiales a un centro de recogida RAEE  
Send the materials to a WEEE collection centre  
Envoyer les matériaux dans une déchetterie DEEE  
Inviare i materiali ad un centro di raccolta RAEE  
Die Materialien in einem WEEE-Zentrum entsorgen

