




## Dimensions



## Accessories



CORD ACCESSORY



TRIMLESS TOOL

## PRODUCT

|           |                                                      |
|-----------|------------------------------------------------------|
| Name      | DUNE 35 WIRE TRIMLESS 3M DIM PH.CUT 3000K PG         |
| Reference | A4822151PG                                           |
| Colour    | Textured Pebble Grey - Other colours, please consult |
| RAL       | 7032                                                 |
| Category  | SUSPENSION                                           |

## LIGHT SOURCE

|                         |                                  |
|-------------------------|----------------------------------|
| Type                    | LED                              |
| Gross luminous flux     | 600 lm                           |
| Colour temperature      | 3000 K - Other K, please consult |
| Chromatic stability     | MacAdam Step 2                   |
| Colour Rendering Index  | CRI>90                           |
| Power                   | 4 W                              |
| Current                 | 120 mA                           |
| Efficacy                | 150 lm/W                         |
| LED lifespan            | L90B10 >55.000h                  |
| Energy efficiency class | E                                |

## LIGHTING FIXTURE | PHOTOMETRIC DATA

|                     |      |
|---------------------|------|
| Lighting efficiency | 74%  |
| Light beam angle    | 132° |

## LIGHTING FIXTURE | ELECTRICAL DATA

|                             |                                       |
|-----------------------------|---------------------------------------|
| Driver                      | Included - Remote                     |
| Power values of the system  | 5,25 W                                |
| Frequency                   | 50/60 Hz                              |
| Dimming                     | Phase Cut - Other DIM, please consult |
| Electrical insulation class | <input type="checkbox"/>              |


## OTHER DATA

|                           |                           |
|---------------------------|---------------------------|
| Sealing                   | IP20                      |
| Wireless control          | Please Consult            |
| Recess measurements       | Ø20 mm                    |
| Cord length               | Max. 3 m                  |
| Fast adjustment tensioner | No                        |
| Weight                    | 795 g                     |
| Packaged weight           | 1241 g                    |
| Packaging dimensions      | 439 x 384 x 127 mm        |
| Units per package         | 1                         |
| Materials                 | Aluminium / Polycarbonate |




The Dune suspension luminaire dresses the light and builds the space with a conical, classic and light silhouette. Its language between the technical and the decorative, redefines this archetype with a pure geometry of sharp edges like folded paper, and a placid and homogeneous projected light that invites to enjoy.

Polar diagram

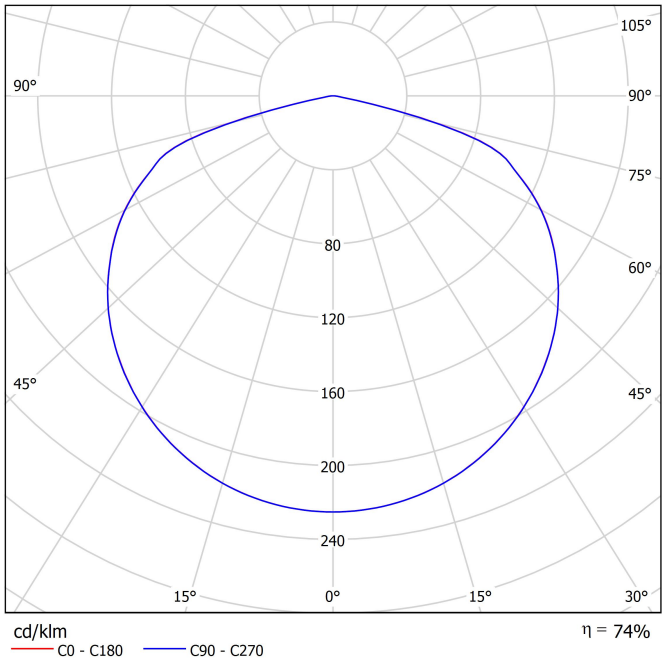


Conical diagram

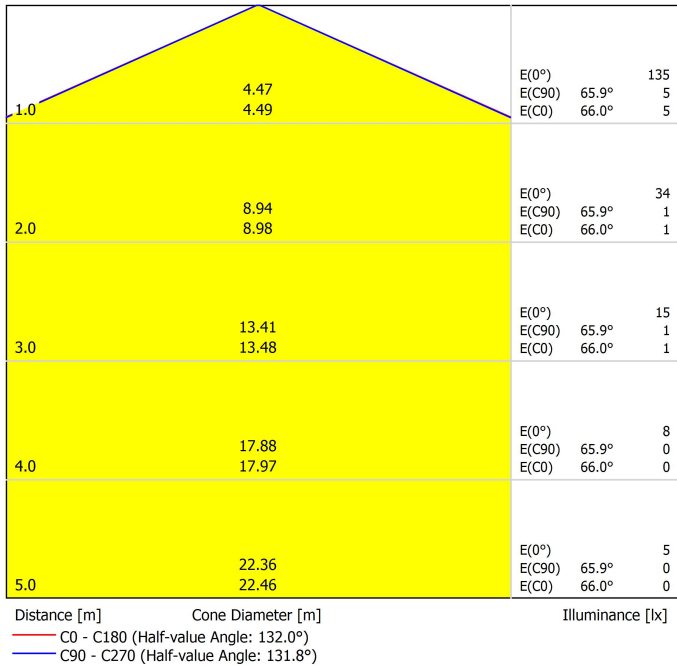




|           |  |                |  |
|-----------|--|----------------|--|
|           |  | PRODUCT        |  |
| Model     |  | Cord Accessory |  |
| Reference |  | 0223-00-00   N |  |
| Colour    |  | N ■ RAL9005    |  |
| Category  |  | Accessories    |  |

Dimmensional drawing

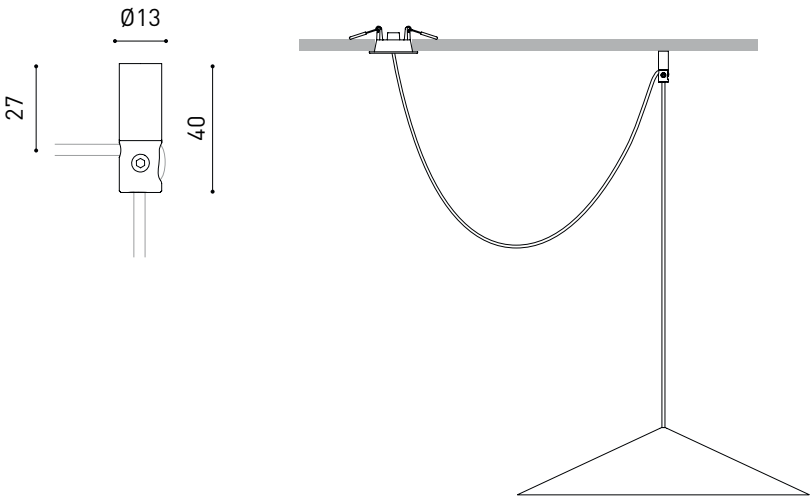



## DRIVER

0001-01-03 DRIVER LED 7W 100/120/155/180mA DIM PH.CUT

## PHASE CUT DIMMERS TESTED FOR COMPATIBILITY:

| Brand / Manufacturer | Model number                              | Dimming Type           |
|----------------------|-------------------------------------------|------------------------|
| Busch                | 2247U                                     | Leading edge           |
| Busch                | 6523 U                                    | Leading edge           |
| Busch                | 6513U-102                                 | Trailing edge          |
| Clipsal              | 32E450TM                                  | Trailing edge          |
| Clipsal*             | 32E450LM                                  | Leading edge           |
| Feller               | 4060.RL                                   | Leading edge           |
| HPM                  | Cat 200L                                  | Leading edge           |
| Legrand              | Cat 400L                                  | Trailing edge          |
| Legrand              | 67083                                     | Trailing edge          |
| Legrand              | 770062                                    | Trailing edge          |
| NIKO                 | 310-01900                                 | Trailing edge          |
| NIKO                 | 330-00700                                 | Trailing edge          |
| NIKO                 | 310-02700                                 | Trailing edge          |
| NIKO                 | 310-02800                                 | Trailing edge          |
| OSRAM                | MCU Te250                                 | Trailing edge          |
| Siemens              | 5TC8 284                                  | Trailing edge          |
| DIGINET              | MEDM/LED Smart phase adaptive dimmer 400W | Trailing edge          |
| CLIPSAL              | 32ELEDM                                   | Trailing edge          |
| Hager B&R            | WBMD400LED                                | Trailing edge          |
| V-PRO                | 250W MAX. GLS                             | Trailing edge          |
| ELKO*                | 316 GLED                                  | Leading edge           |
| SG                   |                                           | Trailing edge          |
| Hamilton             | LEDIT-B100                                | Trailing edge          |
| VARILIGHT            | JQP401W                                   | Trailing edge          |
| VARILIGHT            | KQP221W                                   | Leading edge           |
| VLTIMATE             | GU6012L                                   | Trailing edge          |
| Hager B&R            | WK060                                     | Leading edge           |
| SHUTTLE              | SDIM-T-LED500W                            | Leading edge           |
| RADIANT              | LEDDIMO4-500W                             | Trailing edge          |
| GIRA                 | 238500%                                   | Trailing /Leading edge |
| ABB                  | 652300%                                   | Leading edge           |
| JUNG                 | 1224                                      | Trailing /Leading edge |

THE PARTICULAR CONDITIONS OF EACH INSTALLATION AND THE SPECIFICATIONS AND CONDITIONS OF USE OF EACH REGULATOR, MAY DIFFER FROM THOSE CONSIDERED IN THE COMPATIBILITY TESTING, AND AFFECT ITS PERFORMANCE IN SAID INSTALLATION.



\* FUNCTIONALITY AT THE MINIMUM LOAD TO BE CHECKED




INSTALLATION GUIDE  
[https://youtu.be/sa\\_xAgj4ji4](https://youtu.be/sa_xAgj4ji4)



| PRODUCT   |                                   |
|-----------|-----------------------------------|
| Model     | Trimless Tool <b>D20 X D52 MM</b> |
| Reference | A478-00-01                        |
| Category  | Accessories                       |





Fuente de luz (LED) reemplazable por un profesional autorizado

Replaceable (LED only) light source by an authorized professional.

Source lumineuse (LED) remplaçable par un professionnel agréé

Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato

Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado

Replaceable control gear by an authorized professional

Dispositif de commande remplaçable par un professionnel agréé

Alimentatore sostituibile da parte di un professionista autorizzato

Auswechselbares Betriebsgerät durch autorisierten Fachmann

## Instrucciones para el final de vida y la eliminación de los componentes:

### Instructions on end-of-life and component disposal:


### Instructions pour la gestion des composants en fin de vie et leur mise au rebut :

### Istruzioni per il fine vita e lo smaltimento dei componenti:


### Anweisungen zur entsorgung der Leuchtenkomponenten:



Interrumpir la alimentación del aparato  
Cut the power supply to the luminaire  
Couper l'alimentation du luminaire  
Interrompere l'alimentazione dell'apparecchio  
Stromversorgung der Leuchte unterbrechen



Quitar la(s) fuente(s) de luz para el desecho  
Remove light source(s) for disposal  
Retirer la (les) source(s) lumineuse(s) pour l'élimination  
Rimuovere la/le sorgente/e di luce per lo smaltimento  
Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho  
Remove the battery for decommissioning  
Retirer la batterie pour sa mise au rebut  
Rimuovere la batteria per la dismissione  
Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho  
Remove control gear for disposal  
Retirer le dispositif de commande pour l'élimination  
Rimuovere l'alimentatore per lo smaltimento  
Betriebsgerät zur Entsorgung ausbauen

Enviar los materiales a un centro de recogida RAEE  
Send the materials to a WEEE collection centre  
Envoyer les matériaux dans une déchetterie DEEE  
Inviare i materiali ad un centro di raccolta RAEE  
Die Materialien in einem WEEE-Zentrum entsorgen

