




		PRODUCT
Name		FLIP RECESSED FLOOD 3500K NTMG
Reference		A4910123NTMG
Color		Textured black-Metallized gold - Other colours, please consult
RAL		Metallic finish
Category		CEILING RECESSED
		LIGHT SOURCE
Type		LED
Gross luminous flux		680 lm
Colour temperature		3500 K
Chromatic stability		MacAdam Step 2
Colour Rendering Index		CRI>90
Power		6 W
Current		500 mA
Efficacy		113 lm/W
LED lifespan		L80B10 >60.000h
		LIGHTING FIXTURE PHOTOMETRIC DATA
Lighting efficiency		78%
Light beam angle		34°
		LIGHTING FIXTURE ELECTRICAL DATA
Driver		Included
Power values of the system		7,33 W
Frequency		50/60 Hz
Dimming		No Dim
Electrical insulation class		□
		OTHER DATA
Sealing		IP20
Wireless control		Please Consult
Recess measurements		Ø62 mm
Swivel angle		90°
Rotation angle		350°
Weight		285 g
Packaged weight		370 g
Packaging dimensions		205 x 120 x 96 mm
Units per package		1
Materials		Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate




Flip Recessed is integrated into the space in a recessed, functional and flexible version. The luminaire tilts smoothly and its arm is integrated into its vertical geometry for a compact design.

POLAR DIAGRAM

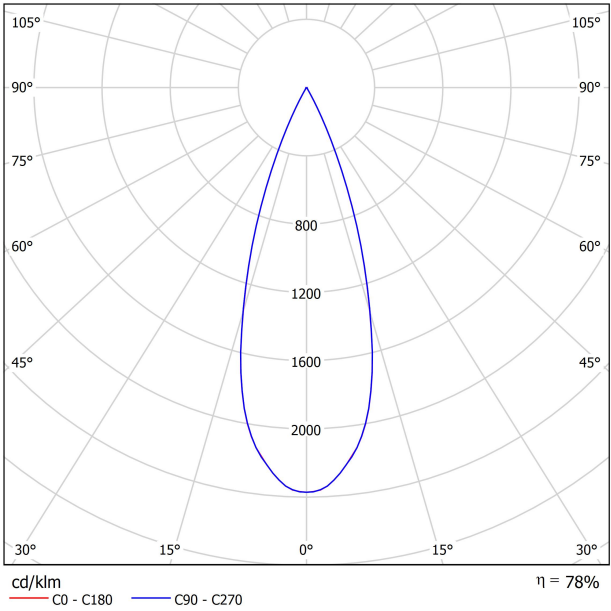

CONICAL DIAGRAM

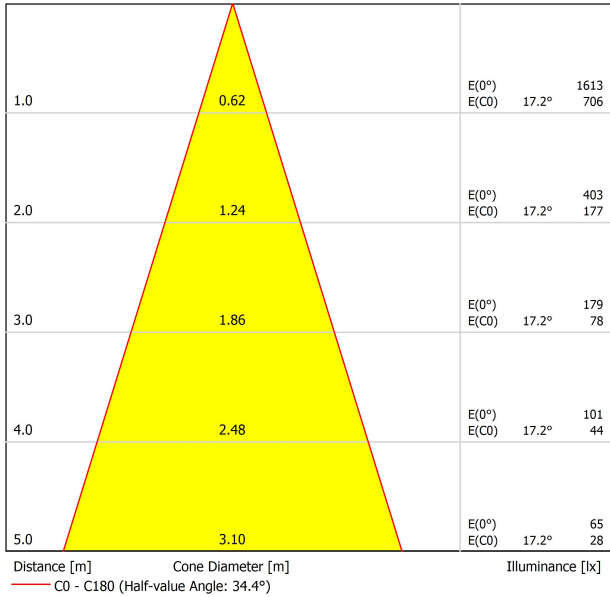



Fuente de luz (LED) reemplazable por un profesional autorizado

Replaceable (LED only) light source by an authorized professional.

Source lumineuse (LED) remplaçable par un professionnel agréé

Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato

Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado

Replaceable control gear by an authorized professional

Dispositif de commande remplaçable par un professionnel agréé

Alimentatore sostituibile da parte di un professionista autorizzato

Auswechselbares Betriebsgerät durch autorisierten Fachmann

INSTRUCCIONES PARA EL FINAL DE VIDA Y LA ELIMINACIÓN LOS COMPONENTES
INSTRUCTIONS ON END-OF-LIFE AND COMPONENT DISPOSAL
INSTRUCTIONS POUR LA GESTION DES COMPOSANTS EN FIN DE VIE ET LEUR MISE AU REBUT
ISTRUZIONI PER IL FINE VITA E LO SMALTIMENTO DEI COMPONENTI
ANWEISUNGEN ZUR ENTSORGUNG DER LEUCHTENKOMPONENTEN



Interrumpir la alimentación del aparato
Cut the power supply to the luminaire
Couper l'alimentation du luminaire
Interrompere l'alimentazione dell'apparecchio
Stromversorgung der Leuchte unterbrechen



Quitar la(s) fuente(s) de luz para el desecho
Remove light source(s) for disposal
Retirer la (les) source(s) lumineuse(s) pour l'élimination
Rimuovere la/le sorgente/e di luce per lo smaltimento
Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho
Remove the battery for decommissioning
Retirer la batterie pour sa mise au rebut
Rimuovere la batteria per la dismissione
Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho
Remove control gear for disposal
Retirer le dispositif de commande pour l'élimination
Rimuovere l'alimentatore per lo smaltimento
Betriebsgerät zur Entsorgung ausbauen

Enviar los materiales a un centro de recogida RAEE
Send the materials to a WEEE collection centre
Envoyer les matériaux dans une déchetterie DEEE
Inviare i materiali ad un centro di raccolta RAEE
Die Materialien in einem WEEE-Zentrum entsorgen

