Standup

ARKOSLIGHT

Dimensions

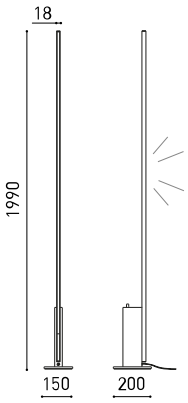

	PRODUCT
Name	STANDUP 3000K NT
Reference	A4940001NT
Colour	Textured black
RAL	9005
Category	TABLE & FLOOR
	LIGHT SOURCE
Type	LED
Gross luminous flux	4320 lm
Colour temperature	3000 K
Chromatic stability	MacAdam Step 2
Colour Rendering Index	CRI>90
Power	27 W
Current	1050 mA
Efficacy	160 lm/W
LED lifespan	L80B10 >60.000h
Energy efficiency class	D
	LIGHTING FIXTURE | PHOTOMETRIC DATA
Lighting efficiency	66%
Light beam angle	105°
	LIGHTING FIXTURE | ELECTRICAL DATA
Driver	Included - Plug | Connect
Power values of the system	33,75 W
Dimming	ON BOARD
Electrical insulation class	□
	OTHER DATA
Sealing	IP20
Weight	4400 g
Packaged weight	7305 g
Packaging dimensions	2110 x 259 x 224 mm
Units per package	1
Materials	Aluminium / Polycarbonate

CE

Devised by Christophe Mathieu, Standup takes form of an ethereal line, becoming a true sculpture of light. The floor-standing luminaire reinterprets the architectural language from the point of view of emotion, with an essential design which generates a sophisticated indirect and ambient light. Its solid aluminium structure underpins the light source with a light but resounding presence, glare free, providing a comfortable distribution of light by reflection on the wall, capable of empowering any room or situation. Its slender geometry is accentuated in contrast with the background when lit; a theatrical play which is enhanced by the graduation of its intensity.

Calle N, s/n - Pol. Ind. El Oliveral
46394 Ribarroja del Turia - Valencia (Spain)
info@arkoslight.com - www.arkoslight.com

5 Year GUARANTEE*

Lighting technical data

ARKOSLIGHT

Polar diagram

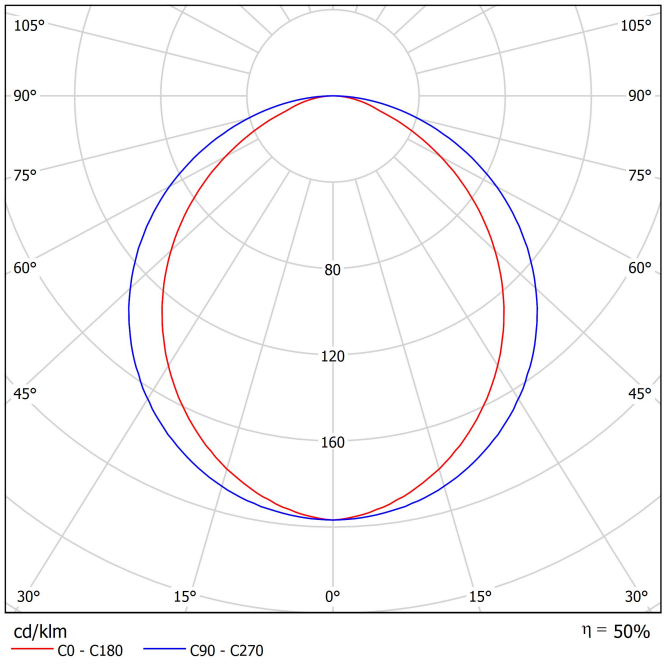

Conical diagram

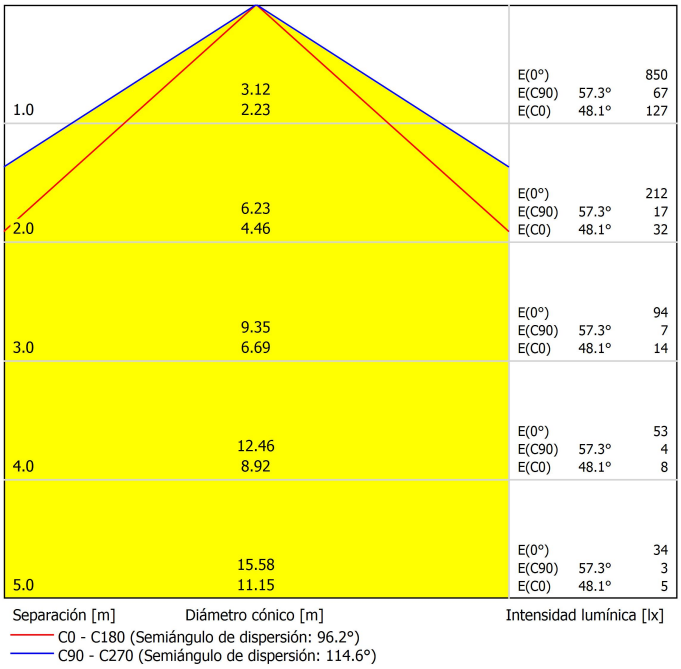

Calle N, s/n - Pol. Ind. El Oliveral
46394 Ribarroja del Turia - Valencia (Spain)
info@arkoslight.com - www.arkoslight.com

5 Year GUARANTEE*

Ecodesign and Energy Labelling

ARKOSLIGHT



Fuente de luz (LED) reemplazable por un profesional autorizado

Replaceable (LED only) light source by an authorized professional.

Source lumineuse (LED) remplaçable par un professionnel agréé

Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato

Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann

Equipo de control reemplazable por un profesional autorizado

Replaceable control gear by an authorized professional

Dispositif de commande remplaçable par un professionnel agréé

Alimentatore sostituibile da parte di un professionista autorizzato

Auswechselbares Betriebsgerät durch autorisierten Fachmann

Instrucciones para el final de vida y la eliminación de los componentes:
Instructions on end-of-life and component disposal:
Instructions pour la gestion des composants en fin de vie et leur mise au rebut :
Istruzioni per il fine vita e lo smaltimento dei componenti:
Anweisungen zur entsorgung der Leuchtenkomponenten:

Interrumpir la alimentación del aparato
Cut the power supply to the luminaire
Couper l'alimentation du luminaire
Interrompere l'alimentazione dell'apparecchio
Stromversorgung der Leuchte unterbrechen



Quitar la(s) fuente(s) de luz para el desecho
Remove light source(s) for disposal
Retirer la (les) source(s) lumineuse(s) pour l'élimination
Rimuovere la/le sorgente/e di luce per lo smaltimento
Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho
Remove the battery for decommissioning
Retirer la batterie pour sa mise au rebut
Rimuovere la batteria per la dismissione
Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho
Remove control gear for disposal
Retirer le dispositif de commande pour l'élimination
Rimuovere l'alimentatore per lo smaltimento
Betriebsgerät zur Entsorgung ausbauen

Enviar los materiales a un centro de recogida RAEE
Send the materials to a WEEE collection centre
Envoyer les matériaux dans une déchetterie DEEE
Inviare i materiali ad un centro di raccolta RAEE
Die Materialien in einem WEEE-Zentrum entsorgen



Calle N, s/n - Pol. Ind. El Oliveral
46394 Ribarroja del Turia-Valencia (Spain)
info@arkoslight.com - www.arkoslight.com