




DIMENSIONS



ACCESSORIES

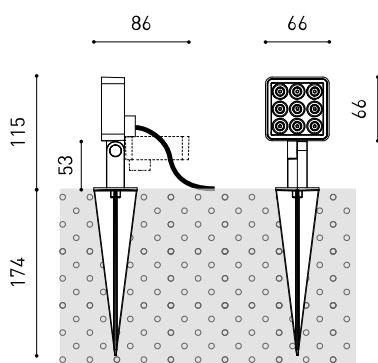

DRIVER OPTIONS



CONNECTOR IP67

Name	FLASH 2700K GT
Reference	A5290000GT
Color	Textured grey
RAL	7021
Category	OUTDOOR

LIGHT SOURCE

Type	LED
Gross luminous flux	715 / 1040 lm
Colour temperature	2700 K
Chromatic stability	MacAdam Step 3
Colour Rendering Index	CRI > 90
Power	5,7 / 8,7 W
Efficacy	125 / 120 lm/W
LED lifespan	L90B10 > 60.000h

LIGHTING FIXTURE | PHOTOMETRIC DATA

Lighting efficiency	81%
Light beam angle	37°

LIGHTING FIXTURE | ELECTRICAL DATA

Driver	Excluded: Must be placed on remote
Dimming	No Dim / DALI
Electrical insulation class	⚡




OTHER DATA

Sealing	IP65
Swivel angle	90°
Rotation angle	360°
Outdoor Use	Yes
Weight	370 g
Packaged weight	432 g
Packaging dimensions	203 x 126 x 60 mm
Units per package	1
Materials	Aluminium / Glass-Transparent / Acrylonitrile Butadiene Styrene / Polycarbonate



Dedicated to its function, Flash is an outdoor projection luminaire with a minimal, discreet body that can be precisely directed in all directions. Like a piece of architecture, this small waterproof capsule of focal light can highlight the delicacy of a flower or the presence of a sculpture, interpret volumes or simply guide a path. It can be installed with a spike or directly into the ground.



DRIVER OPTIONS				P	I	K	Lm
FLASH 1	 NO DIM	0434-00-40	1 to 4 Flash	5,7W	700mA	2700K	715
						3000K	730
FLASH 2	 NO DIM	0434-00-41	1 to 4 Flash	8,7W	1050mA	2700K	1040
						3000K	1070
	 DALI	0434-01-26	1 to 6 Flash	8,7W	1050mA	2700K	1040
						3000K	1070


220
240 V~ | IP20

Driver must be placed on remote

IP67 CONNECTOR

ARKOSLIGHT

OPTIONAL ACCESSORY

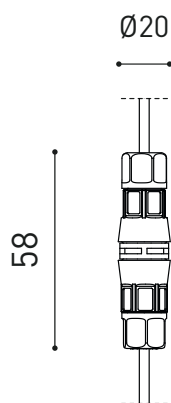

PRODUCT	
Model	Connector IP67
Reference	0434-01- 66 N
Category	Accessories

For cable $\text{Ø}4,5 - 6,5\text{mm}$ | section $\leq 1,5\text{mm}^2$



Fuente de luz (LED) reemplazable por un profesional autorizado

Replaceable (LED only) light source by an authorized professional.

Source lumineuse (LED) remplaçable par un professionnel agréé

Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato

Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado

Replaceable control gear by an authorized professional

Dispositif de commande remplaçable par un professionnel agréé

Alimentatore sostituibile da parte di un professionista autorizzato

Auswechselbares Betriebsgerät durch autorisierten Fachmann

INSTRUCCIONES PARA EL FINAL DE VIDA Y LA ELIMINACIÓN LOS COMPONENTES
 INSTRUCTIONS ON END-OF-LIFE AND COMPONENT DISPOSAL
 INSTRUCTIONS POUR LA GESTION DES COMPOSANTS EN FIN DE VIE ET LEUR MISE AU REBUT
 ISTRUZIONI PER IL FINE VITA E LO SMALTIMENTO DEI COMPONENTI
 ANWEISUNGEN ZUR ENTSORGUNG DER LEUCHTENKOMPONENTEN



Interrumpir la alimentación del aparato
 Cut the power supply to the luminaire
 Couper l'alimentation du luminaire
 Interrompere l'alimentazione dell'apparecchio
 Stromversorgung der Leuchte unterbrechen



Quitar la(s) fuente(s) de luz para el desecho
 Remove light source(s) for disposal
 Retirer la (les) source(s) lumineuse(s) pour l'élimination
 Rimuovere la/le sorgente/e di luce per lo smaltimento
 Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho
 Remove the battery for decommissioning
 Retirer la batterie pour sa mise au rebut
 Rimuovere la batteria per la dismissione
 Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho
 Remove control gear for disposal
 Retirer le dispositif de commande pour l'élimination
 Rimuovere l'alimentatore per lo smaltimento
 Betriebsgerät zur Entsorgung ausbauen



Enviar los materiales a un centro de recogida RAEE
 Send the materials to a WEEE collection centre
 Envoyer les matériaux dans une déchetterie DEEE
 Inviare i materiali ad un centro di raccolta RAEE
 Die Materialien in einem WEEE-Zentrum entsorgen

