




#### DIMENSIONS



#### ACCESSORIES

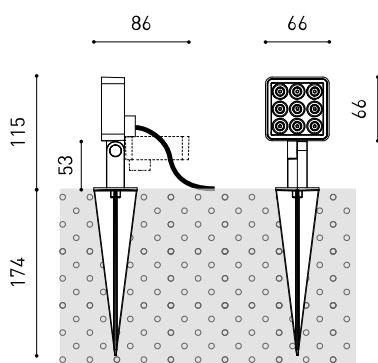

DRIVER OPTIONS






CONNECTOR IP67

Name	FLASH 2700K OX
Reference	A52900000X
Color	Textured oxidon
Category	OUTDOOR
<b>LIGHT SOURCE</b>	
Type	LED
Gross luminous flux	715 / 1040 lm
Colour temperature	2700 K
Chromatic stability	MacAdam Step 3
Colour Rendering Index	CRI>90
Power	5,7 / 8,7 W
Efficacy	125 / 120 lm/W
LED lifespan	L90B10 >60.000h
<b>LIGHTING FIXTURE   PHOTOMETRIC DATA</b>	
Lighting efficiency	81%
Light beam angle	37°
<b>LIGHTING FIXTURE   ELECTRICAL DATA</b>	
Driver	Excluded: Must be placed on remote
Dimming	No Dim / DALI
Electrical insulation class	III
<b>OTHER DATA</b>	
Sealing	IP65
Swivel angle	90°
Rotation angle	360°
Outdoor Use	Yes
Weight	370 g
Packaged weight	432 g
Packaging dimensions	203 x 126 x 60 mm
Units per package	1
Materials	Aluminium / Glass-Transparent / Acrylonitrile Butadiene Styrene / Polycarbonate



Dedicated to its function, Flash is an outdoor projection luminaire with a minimal, discreet body that can be precisely directed in all directions. Like a piece of architecture, this small waterproof capsule of focal light can highlight the delicacy of a flower or the presence of a sculpture, interpret volumes or simply guide a path. It can be installed with a spike or directly into the ground.



DRIVER OPTIONS				P	I	K	Lm
FLASH 1	 NO DIM	<b>0434-00-40</b>	1 to 4 Flash	5,7W	700mA	2700K	715
						3000K	730
FLASH 2	 NO DIM	<b>0434-00-41</b>	1 to 4 Flash	8,7W	1050mA	2700K	1040
						3000K	1070
	 DALI	<b>0434-01-26</b>	1 to 6 Flash	8,7W	1050mA	2700K	1040
						3000K	1070


220  
240 V~ | IP20

Driver must be placed on remote

# IP67 CONNECTOR

ARKOSLIGHT

OPTIONAL ACCESSORY

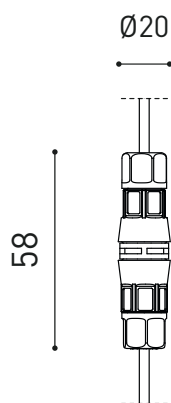

	PRODUCT
Model	Connector IP67
Reference	0434-01- 66   N
Category	Accessories

For cable  $\text{Ø}4,5 - 6,5\text{mm}$  | section  $\leq 1,5\text{mm}^2$



Fuente de luz (LED) reemplazable por un profesional autorizado

Replaceable (LED only) light source by an authorized professional.

Source lumineuse (LED) remplaçable par un professionnel agréé

Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato

Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado

Replaceable control gear by an authorized professional

Dispositif de commande remplaçable par un professionnel agréé

Alimentatore sostituibile da parte di un professionista autorizzato

Auswechselbares Betriebsgerät durch autorisierten Fachmann

INSTRUCCIONES PARA EL FINAL DE VIDA Y LA ELIMINACIÓN LOS COMPONENTES  
 INSTRUCTIONS ON END-OF-LIFE AND COMPONENT DISPOSAL  
 INSTRUCTIONS POUR LA GESTION DES COMPOSANTS EN FIN DE VIE ET LEUR MISE AU REBUT  
 ISTRUZIONI PER IL FINE VITA E LO SMALTIMENTO DEI COMPONENTI  
 ANWEISUNGEN ZUR ENTSORGUNG DER LEUCHTENKOMPONENTEN



Interrumpir la alimentación del aparato  
 Cut the power supply to the luminaire  
 Couper l'alimentation du luminaire  
 Interrompere l'alimentazione dell'apparecchio  
 Stromversorgung der Leuchte unterbrechen



Quitar la(s) fuente(s) de luz para el desecho  
 Remove light source(s) for disposal  
 Retirer la (les) source(s) lumineuse(s) pour l'élimination  
 Rimuovere la/le sorgente/e di luce per lo smaltimento  
 Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho  
 Remove the battery for decommissioning  
 Retirer la batterie pour sa mise au rebut  
 Rimuovere la batteria per la dismissione  
 Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho  
 Remove control gear for disposal  
 Retirer le dispositif de commande pour l'élimination  
 Rimuovere l'alimentatore per lo smaltimento  
 Betriebsgerät zur Entsorgung ausbauen



Enviar los materiales a un centro de recogida RAEE  
 Send the materials to a WEEE collection centre  
 Envoyer les matériaux dans une déchetterie DEEE  
 Inviare i materiali ad un centro di raccolta RAEE  
 Die Materialien in einem WEEE-Zentrum entsorgen

